


# TPS3852-Q1 高精度電圧スーパーバイザ、ウォッチドッグ・タイマ内蔵

## 1 特長

- 下記内容でAEC-Q100認定済み
  - デバイス温度グレード1: 動作時周囲温度範囲  $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$
  - デバイスHBM ESD分類レベル2
  - デバイスCDM ESD分類レベルC4B
- $V_{DD}$ 入力電圧範囲: 1.6V~6.5V
- 0.8%の電圧スレッシュホールド精度
- 低い消費電流:  $I_{DD} = 10\mu\text{A}$  (標準値)
- ウォッチドッグのタイムアウトをユーザーがプログラム可能
- 工場プログラム済みの高精度のウォッチドッグとリセット・タイマ
  - $\pm 15\%$ 精度のWDTおよびRST遅延
- オープン・ドレイン出力
- マニュアル・リセット入力( $\overline{\text{MR}}$ )
- 高精度の電圧監視
  - 1.8V~5.0Vの共通レールをサポート
  - 4%および7%のスレッシュホールドを利用可能
  - 0.5%のヒステリシス
- ウォッチドッグのディセーブル機能
- 3mmx3mmの小型8ピンVSONパッケージで供給

## 2 アプリケーション

- 安全性が重要なアプリケーション
  - 車載用視覚情報システム
  - 車載用ADASシステム
  - テレマティクス制御ユニット
  - FPGAおよびASIC
  - マイクロコントローラおよびDSP
- 代表的なアプリケーション回路

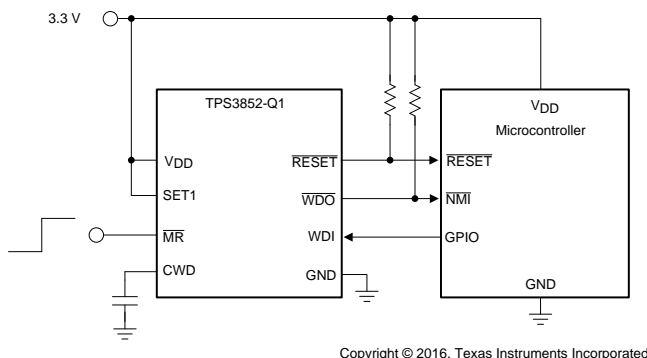

## 3 概要

TPS3852-Q1は高精度の電圧スーパーバイザで、ウィンドウ・ウォッチドッグ・タイマが内蔵されています。TPS3852-Q1には高精度の低電圧スーパーバイザが内蔵されており、低電圧スレッシュホールド( $V_{ITN}$ )は $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ の規定の温度範囲全体にわたって0.8%の精度を実現しています。さらに、TPS3852-Q1には正確なヒステリシスが含まれているため、このデバイスは許容範囲の狭いシステムでの使用に理想的です。スーパーバイザの $\overline{\text{RESET}}$ 遅延は、高精度の遅延タイマにより15%精度を実現しています。

TPS3852-Q1にはプログラム可能なウィンドウ・ウォッチドッグ・タイマが内蔵されており、広範なアプリケーションに使用できます。専用ウォッチドッグ出力( $\overline{\text{WDO}}$ )により分解能が向上し、フォルト状況の性質を判定するために役立ちます。ウォッチドッグのタイムアウトは、外付けのコンデンサ、または工場プログラムされるデフォルトの遅延設定によりプログラム可能です。ウォッチドッグはディセーブル可能で、開発プロセスにおいて望ましくないウォッチドッグのタイムアウトを回避できます。


TPS3852-Q1は、小型の3.00mmx3.00mm、8ピンのVSONパッケージで供給されます。TPS3852-Q1はウェットダブル・フランクを採用し、光学検査を容易に行えます。

### 製品情報<sup>(1)</sup>

型番	パッケージ	本体サイズ(公称)
TPS3852-Q1	VSON (8)	3.00mmx3.00mm

(1) 提供されているすべてのパッケージについては、データシートの末尾にある注文情報を参照してください。

### 低電圧スレッシュホールド( $V_{ITN}$ )の精度と温度との関係

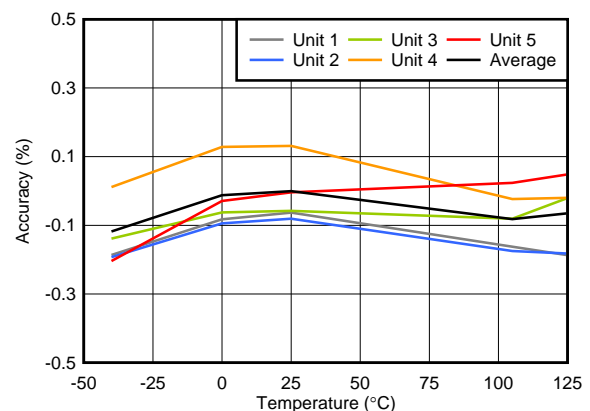


## 目次

<b>1</b>	<b>特長</b> .....	<b>1</b>	7.4	Device Functional Modes.....	<b>15</b>
<b>2</b>	<b>アプリケーション</b> .....	<b>1</b>	<b>8</b>	<b>Application and Implementation</b> .....	<b>16</b>
<b>3</b>	<b>概要</b> .....	<b>1</b>	8.1	Application Information.....	<b>16</b>
<b>4</b>	<b>改訂履歴</b> .....	<b>2</b>	8.2	Typical Application .....	<b>19</b>
<b>5</b>	<b>Pin Configuration and Functions</b> .....	<b>3</b>	<b>9</b>	<b>Power Supply Recommendations</b> .....	<b>22</b>
<b>6</b>	<b>Specifications</b> .....	<b>4</b>	<b>10</b>	<b>Layout</b> .....	<b>22</b>
6.1	Absolute Maximum Ratings .....	<b>4</b>	10.1	Layout Guidelines .....	<b>22</b>
6.2	ESD Ratings.....	<b>4</b>	10.2	Layout Example .....	<b>22</b>
6.3	Recommended Operating Conditions.....	<b>4</b>	<b>11</b>	<b>デバイスおよびドキュメントのサポート</b> .....	<b>23</b>
6.4	Thermal Information .....	<b>5</b>	11.1	デバイス・サポート .....	<b>23</b>
6.5	Electrical Characteristics.....	<b>5</b>	11.2	ドキュメントの更新通知を受け取る方法.....	<b>23</b>
6.6	Timing Requirements .....	<b>6</b>	11.3	コミュニティ・リソース .....	<b>23</b>
6.7	Typical Characteristics .....	<b>8</b>	11.4	商標 .....	<b>23</b>
<b>7</b>	<b>Detailed Description</b> .....	<b>11</b>	11.5	静電気放電に関する注意事項 .....	<b>23</b>
7.1	Overview .....	<b>11</b>	11.6	Glossary .....	<b>23</b>
7.2	Functional Block Diagram .....	<b>11</b>	<b>12</b>	<b>メカニカル、パッケージ、および注文情報</b> .....	<b>24</b>
7.3	Feature Description.....	<b>12</b>			

## 4 改訂履歴

日付	改訂内容	注
2017年2月	*	初版

## 5 Pin Configuration and Functions

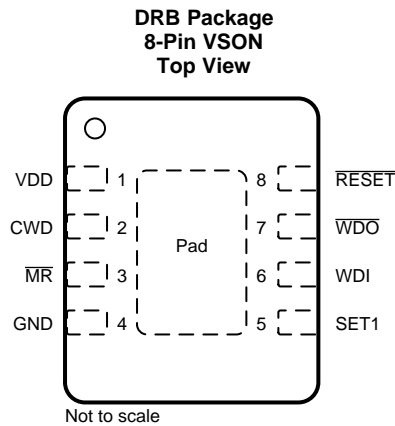

### Pin Functions

NAME	NO.	I/O	DESCRIPTION
CWD	2	—	Programmable watchdog timeout input. Watchdog timeout is set by connecting a capacitor between this pin and ground. Furthermore, this pin can also be connected by a 10-k $\Omega$ resistor to VDD, or leaving unconnected (NC) further enables the selection of the preset watchdog timeouts; see the <a href="#">Timing Requirements</a> table. When using a capacitor, the TPS3852-Q1 determines the window watchdog upper boundary with <a href="#">式 1</a> . See <a href="#">表 4</a> and the <a href="#">CWD Functionality</a> section for additional information.
GND	4	—	Ground pin
MR	3	I	Manual reset pin. A logical low on this pin issues a <b>RESET</b> . This pin is internally pulled up to VDD. <b>RESET</b> remains low for a fixed reset delay ( $t_{RST}$ ) time after MR is deasserted (high).
RESET	8	O	Reset output. Connect <b>RESET</b> using a 1-k $\Omega$ to 100-k $\Omega$ resistor to the desired pullup voltage rail ( $V_{PU}$ ). <b>RESET</b> goes low when VDD goes below the undervoltage threshold ( $V_{ITN}$ ). When VDD is within the normal operating range, the <b>RESET</b> timeout counter starts. At completion, <b>RESET</b> goes high. During startup, the state of <b>RESET</b> is undefined below the specified power-on-reset (POR) voltage ( $V_{POR}$ ). Above POR, <b>RESET</b> goes low and remains low until the monitored voltage is within the correct operating range (above $V_{ITN} + V_{HYST}$ ) and the <b>RESET</b> timeout is complete.
SET1	5	I	Logic input. Grounding the SET1 pin disables the watchdog timer.
VDD	1	I	Supply voltage pin. For noisy systems, connecting a 0.1- $\mu$ F bypass capacitor is recommended.
WDI	6	I	Watchdog input. A falling transition (edge) must occur at this pin between the lower ( $t_{WDL(max)}$ ) and upper ( $t_{WDL(min)}$ ) window boundaries in order for <b>WDO</b> to not assert. When the watchdog is not in use, the SET1 pin can be used to disable the watchdog. The input at WDI is ignored when <b>RESET</b> or <b>WDO</b> are low (asserted) and also when the watchdog is disabled. If the watchdog is disabled, then WDI cannot be left unconnected and must be driven to either VDD or GND.
WDO	7	O	Watchdog output. Connect <b>WDO</b> with a 1-k $\Omega$ to 100-k $\Omega$ resistor to the desired pullup voltage rail ( $V_{PU}$ ). <b>WDO</b> goes low (asserts) when a watchdog timeout occurs. <b>WDO</b> only asserts when <b>RESET</b> is high. When a watchdog timeout occurs, <b>WDO</b> goes low (asserts) for the set <b>RESET</b> timeout delay ( $t_{RST}$ ). When <b>RESET</b> goes low, <b>WDO</b> is in a high-impedance state.
Thermal pad		—	Connect the thermal pad to a large-area ground plane. The thermal pad is internally connected to GND.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

 over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
Supply voltage range	VDD	−0.3	7	V
Output voltage range	$\overline{\text{RESET}}$ , $\overline{\text{WDO}}$	−0.3	7	V
Voltage ranges	SET1, WDI, $\overline{\text{MR}}$	−0.3	7	V
	CWD, CRST	−0.3	$V_{\text{DD}} + 0.3^{(2)}$	
Output pin current		±20		mA
Input current (all pins)		±20		mA
Continuous total power dissipation		See <a href="#">Thermal Information</a>		
Temperature	Operating junction, $T_J^{(3)}$	−40	150	°C
	Operating free-air, $T_A^{(3)}$	−40	150	
	Storage, $T_{\text{stg}}$	−65	150	

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The absolute maximum rating is  $V_{\text{DD}} + 0.3$  V or 7.0 V, whichever is smaller.
- (3) Assume that  $T_J = T_A$  as a result of the low dissipated power in this device.

### 6.2 ESD Ratings

		VALUE	UNIT
$V_{\text{(ESD)}}$ Electrostatic discharge	Human-body model (HBM), per AEC Q100-002 <sup>(1)</sup>	±2000	V
	Charged-device model (CDM), per AEC Q100-011	±750	

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
$V_{\text{DD}}$	Supply pin voltage	1.6		6.5	V
$V_{\text{SET1}}$	SET1 pin voltage	0		6.5	V
$V_{\overline{\text{MR}}}$	MR pin voltage	0		6.5	V
$C_{\text{CWD}}$	Watchdog timing capacitor	0.1 <sup>(1)</sup>		1000 <sup>(1)</sup>	nF
CWD	Pullup resistor to VDD	9	10	11	kΩ
$R_{\text{PU}}$	Pullup resistor, $\overline{\text{RESET}}$ and $\overline{\text{WDO}}$	1	10	100	kΩ
$I_{\overline{\text{RESET}}}$	$\overline{\text{RESET}}$ pin current			10	mA
$I_{\overline{\text{WDO}}}$	Watchdog output current			10	mA
$T_J$	Junction temperature	−40		125	°C

- (1) Using a  $C_{\text{CWD}}$  capacitor of 0.1 nF or 1000 nF gives a  $t_{\text{WDO(typ)}}$  of 62.74 ms or 77.45 seconds, respectively.

## 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TPS3852-Q1	UNIT
		DRB (VSON)	
		8 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	47.7	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	51.5	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	22.2	°C/W
ψ <sub>JT</sub>	Junction-to-top characterization parameter	1.3	°C/W
ψ <sub>JB</sub>	Junction-to-board characterization parameter	22.3	°C/W
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	4.3	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

at  $V_{ITN} + V_{HYST} \leq V_{DD} \leq 6.5$  V over the operating temperature range of  $-40^{\circ}\text{C} \leq T_A, T_J \leq +125^{\circ}\text{C}$  (unless otherwise noted); the open-drain pullup resistors are 10 kΩ for each output; typical values are at  $T_J = 25^{\circ}\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
GENERAL CHARACTERISTICS						
V <sub>DD</sub> <sup>(1)</sup>	Supply voltage		1.6		6.5	V
I <sub>DD</sub>	Supply current			10	19	μA
RESET FUNCTION						
V <sub>POR</sub> <sup>(2)</sup>	Power-on-reset voltage	I <sub>RESET</sub> = 15 μA, V <sub>OL(MAX)</sub> = 0.25 V			0.8	V
V <sub>UVLO</sub> <sup>(3)</sup>	Undervoltage lockout voltage			1.35		V
V <sub>ITN</sub>	Undervoltage threshold accuracy, entering RESET	V <sub>DD</sub> falling	V <sub>ITN</sub> – 0.8%		V <sub>ITN</sub> + 0.8%	
V <sub>HYST</sub>	Hysteresis voltage	V <sub>DD</sub> rising	0.2%	0.5%	0.8%	
I <sub>MR</sub>	MR pin internal pullup current	V <sub>MR</sub> = 0 V	500	620	700	nA
WINDOW WATCHDOG FUNCTION						
I <sub>CWD</sub>	CWD pin charge current	CWD = 0.5 V	337	375	413	nA
V <sub>CWD</sub>	CWD pin threshold voltage		1.192	1.21	1.228	V
V <sub>OL</sub>	RESET, WDO output low	V <sub>DD</sub> = 5 V, I <sub>RESET</sub> = I <sub>WDO</sub> = 3 mA			0.4	V
I <sub>D</sub>	RESET, WDO output leakage current, open-drain	V <sub>DD</sub> = V <sub>ITN</sub> + V <sub>HYST</sub> , V <sub>RESET</sub> = V <sub>WDO</sub> = 6.5 V			1	μA
V <sub>IL</sub>	Low-level input voltage (MR, SET1)				0.25	V
V <sub>IH</sub>	High-level input voltage (MR, SET1)		0.8			V
V <sub>IL(WDI)</sub>	Low-level input voltage (WDI)				0.3 × V <sub>DD</sub>	V
V <sub>IH(WDI)</sub>	High-level input voltage (WDI)		0.8 × V <sub>DD</sub>			V

(1) During power on, V<sub>DD</sub> must be a minimum of 1.6 V for at least 300 μs before RESET correlates with V<sub>DD</sub>.

(2) When V<sub>DD</sub> falls below V<sub>POR</sub>, RESET and  $\overline{\text{WDO}}$  are undefined.


(3) When V<sub>DD</sub> falls below UVLO, RESET is driven low.

## 6.6 Timing Requirements

at  $V_{ITN} + V_{HYST} \leq V_{DD} \leq 6.5$  V over the operating temperature range of  $-40^{\circ}\text{C} \leq T_A, T_J \leq +125^{\circ}\text{C}$  (unless otherwise noted); the open-drain pullup resistors are 10 k $\Omega$  for each output; typical values are at  $T_J = 25^{\circ}\text{C}$


			MIN	TYP	MAX	UNIT
<b>GENERAL</b>						
$t_{INIT}$	CWD pin evaluation period			381		$\mu\text{s}$
	Minimum $\overline{\text{MR}}$ , SET1 pin pulse duration			1		$\mu\text{s}$
	Startup delay			300		$\mu\text{s}$
<b>RESET FUNCTION</b>						
$t_{RST}$	Reset timeout period		170	200	230	ms
$t_{RST-DEL}$	$V_{DD}$ to $\overline{\text{RESET}}$ delay	$V_{DD} = V_{ITN} + V_{HYST} + 2.5\%$		35		$\mu\text{s}$
		$V_{DD} = V_{ITN} - 2.5\%$		17		
$t_{MR-DEL}$	$\overline{\text{MR}}$ to $\overline{\text{RESET}}$ delay			200		ns
<b>Watchdog Function</b>						
$t_{WDL}$	Window watchdog lower boundary	CWD = NC, SET1 = 0 <sup>(1)</sup>	Watchdog disabled			ms
		CWD = NC, SET1 = 1 <sup>(1)</sup>	680	800	920	
		CWD = 10 k $\Omega$ to VDD, SET1 = 0 <sup>(1)</sup>	Watchdog disabled			ms
		CWD = 10 k $\Omega$ to VDD, SET1 = 1 <sup>(1)</sup>	1.48	1.85	2.22	
$t_{WDU}$	Window watchdog upper boundary	CWD = NC, SET1 = 0 <sup>(1)</sup>	Watchdog disabled			ms
		CWD = NC, SET1 = 1 <sup>(1)</sup>	1360	1600	1840	
		CWD = 10 k $\Omega$ to VDD, SET1 = 0 <sup>(1)</sup>	Watchdog disabled			ms
		CWD = 10 k $\Omega$ to VDD, SET1 = 1 <sup>(1)</sup>	9.35	11.0	12.65	
$t_{WD-setup}$	Setup time required for device to respond to changes on WDI after being enabled			150		$\mu\text{s}$
	Minimum WDI pulse duration			50		ns
$t_{WD-DEL}$	WDI to $\overline{\text{WDO}}$ delay			50		ns

(1) SET1 = 0 means  $V_{SET1} < V_{IL}$ , SET1 = 1 means  $V_{SET1} > V_{IH}$ .

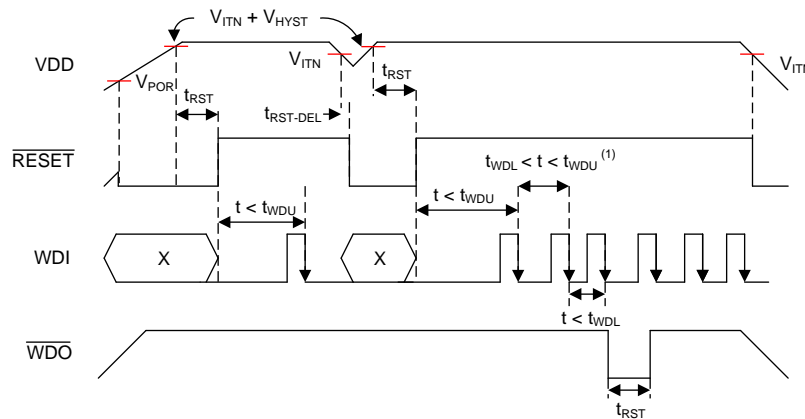

(1) See [Figure 2](#) for WDI timing requirements.

**Figure 1. Timing Diagram**

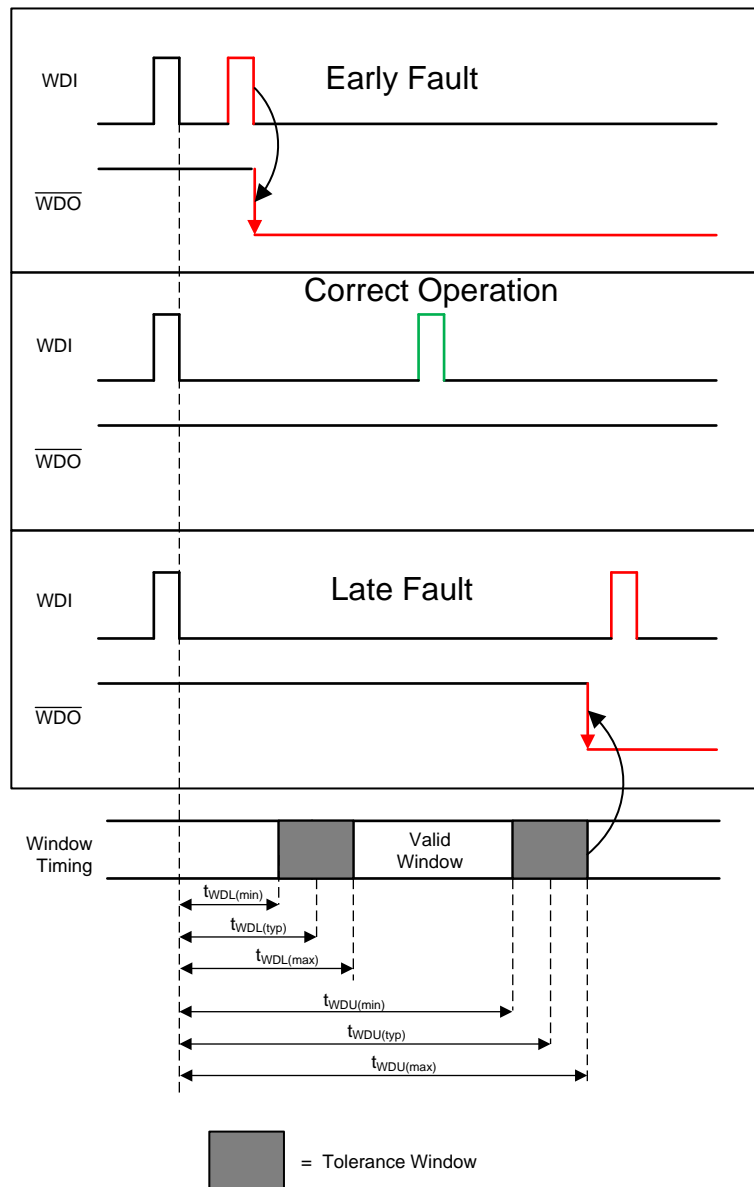

**图 2. TPS3852-Q1 Window Watchdog Timing**

## 6.7 Typical Characteristics

all curves are taken at 25°C with  $1.6\text{ V} \leq V_{DD} \leq 6.5\text{ V}$  (unless otherwise noted)

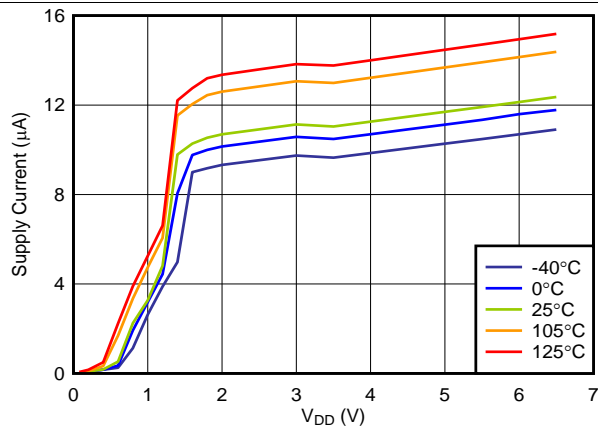


图 3. Supply Current vs  $V_{DD}$

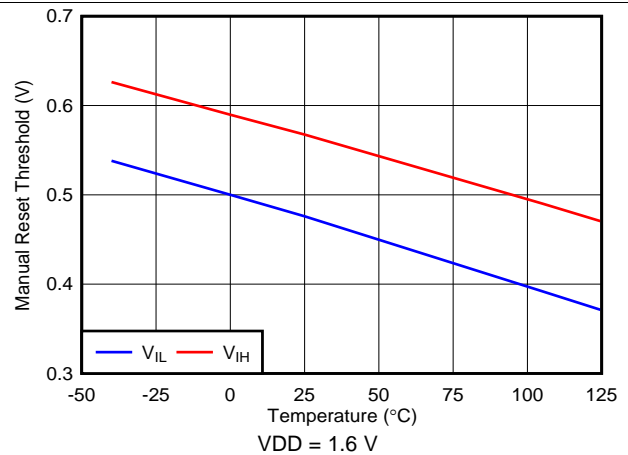


图 4.  $\overline{MR}$  Threshold vs Temperature

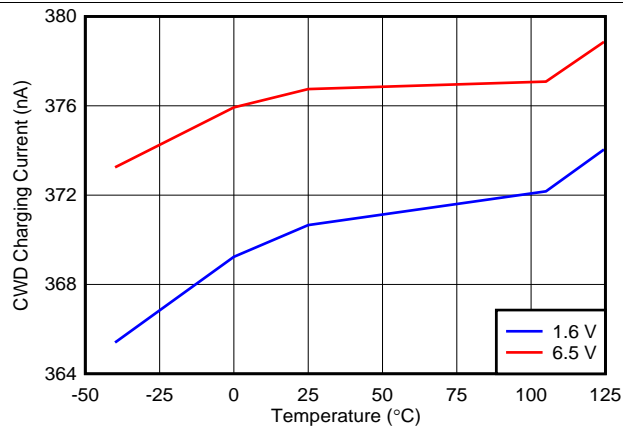


图 5. CWD Charging Current vs Temperature

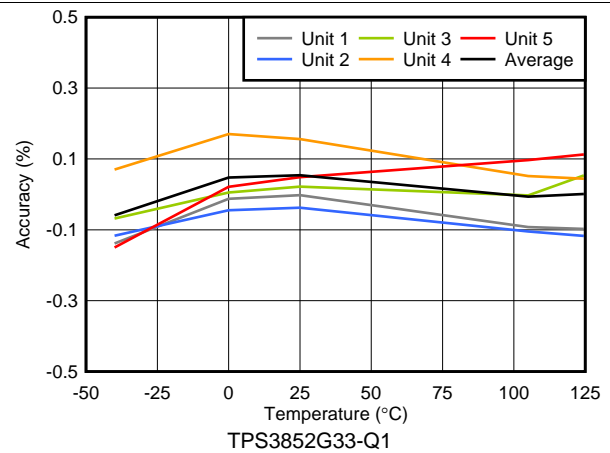


图 6.  $V_{ITN} + V_{HYST}$  Accuracy vs Temperature


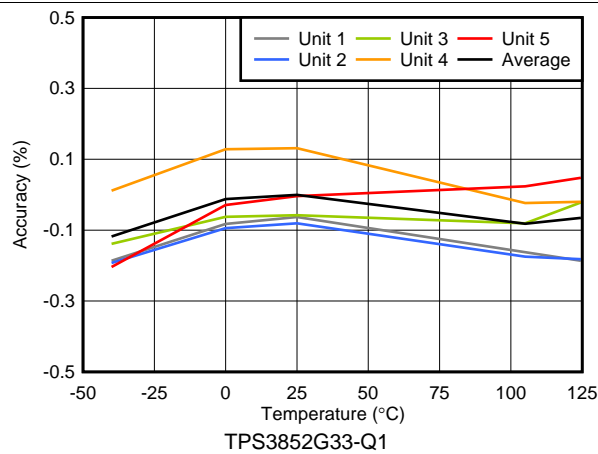


图 7.  $V_{ITN}$  Accuracy vs Temperature




Includes G and H versions with 3.3-V nominal monitored voltage, total units = 15,536

图 8.  $V_{ITN} + V_{HYST}$  Accuracy Histogram

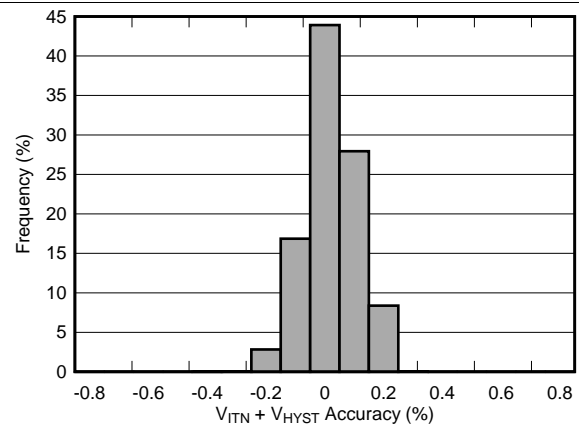


## Typical Characteristics (continued)

all curves are taken at 25°C with  $1.6\text{ V} \leq V_{DD} \leq 6.5\text{ V}$  (unless otherwise noted)

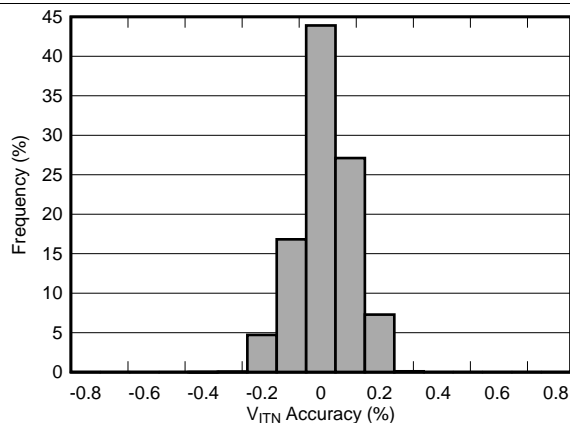

Includes G and H versions with 3.3-V nominal monitored voltage, total units = 15,536

图 9.  $V_{ITN}$  Accuracy Histogram

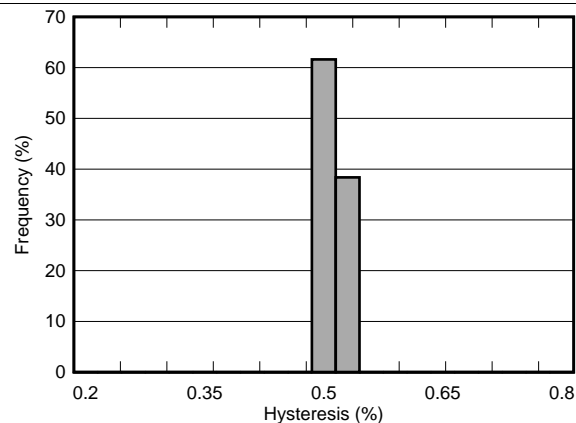

Includes G and H versions with 3.3-V nominal monitored voltage, total units = 15,536

图 10. Hysteresis Histogram

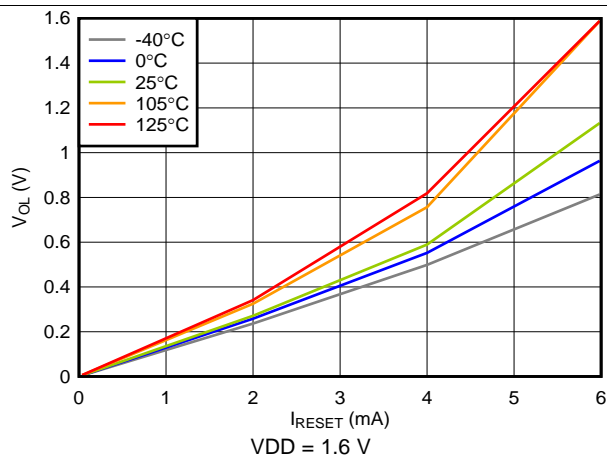


图 11. Low-Level  $\overline{\text{RESET}}$  Voltage vs  $\overline{\text{RESET}}$  Current

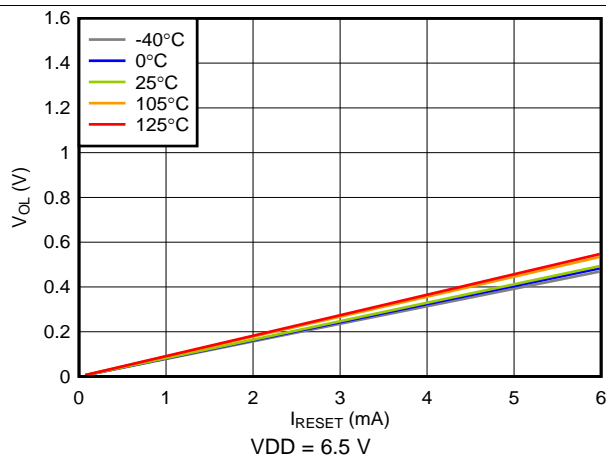


图 12. Low-Level  $\overline{\text{RESET}}$  Voltage vs  $\overline{\text{RESET}}$  Current

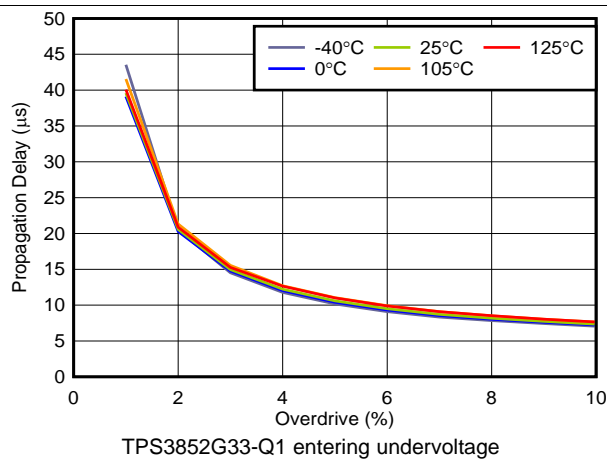


图 13. Propagation Delay vs Overdrive


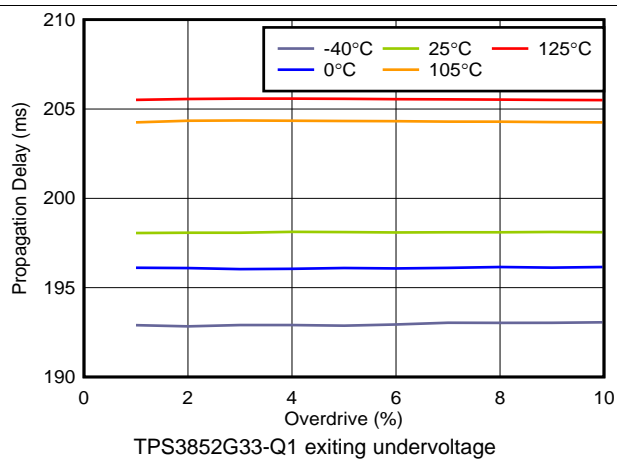


图 14. Propagation Delay ( $t_{RST}$ ) vs Overdrive

## Typical Characteristics (continued)

all curves are taken at 25°C with  $1.6\text{ V} \leq V_{DD} \leq 6.5\text{ V}$  (unless otherwise noted)

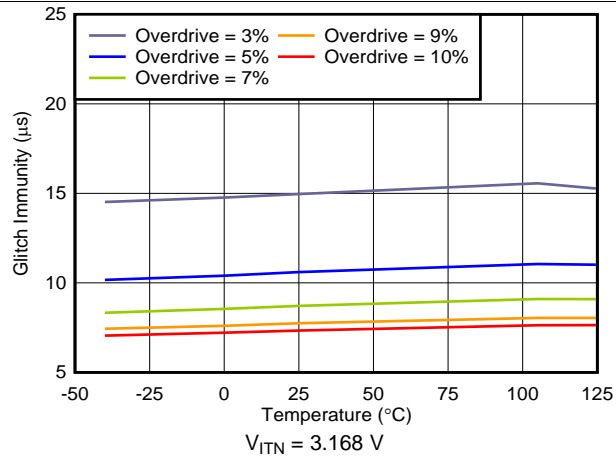


⊠ 15. High-to-Low Glitch Immunity vs Temperature

## 7 Detailed Description

### 7.1 Overview

The TPS3852-Q1 is a high-accuracy voltage supervisor with an integrated window watchdog timer. This device includes a precision undervoltage supervisor with a threshold that achieves 0.8% accuracy over the specified temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . In addition, the TPS3852-Q1 includes accurate hysteresis on the threshold, making the device ideal for use with tight tolerance systems where voltage supervisors must ensure a RESET before the minimum supply tolerance of the microprocessor or system-on-a-chip (SoC) is reached.

### 7.2 Functional Block Diagram

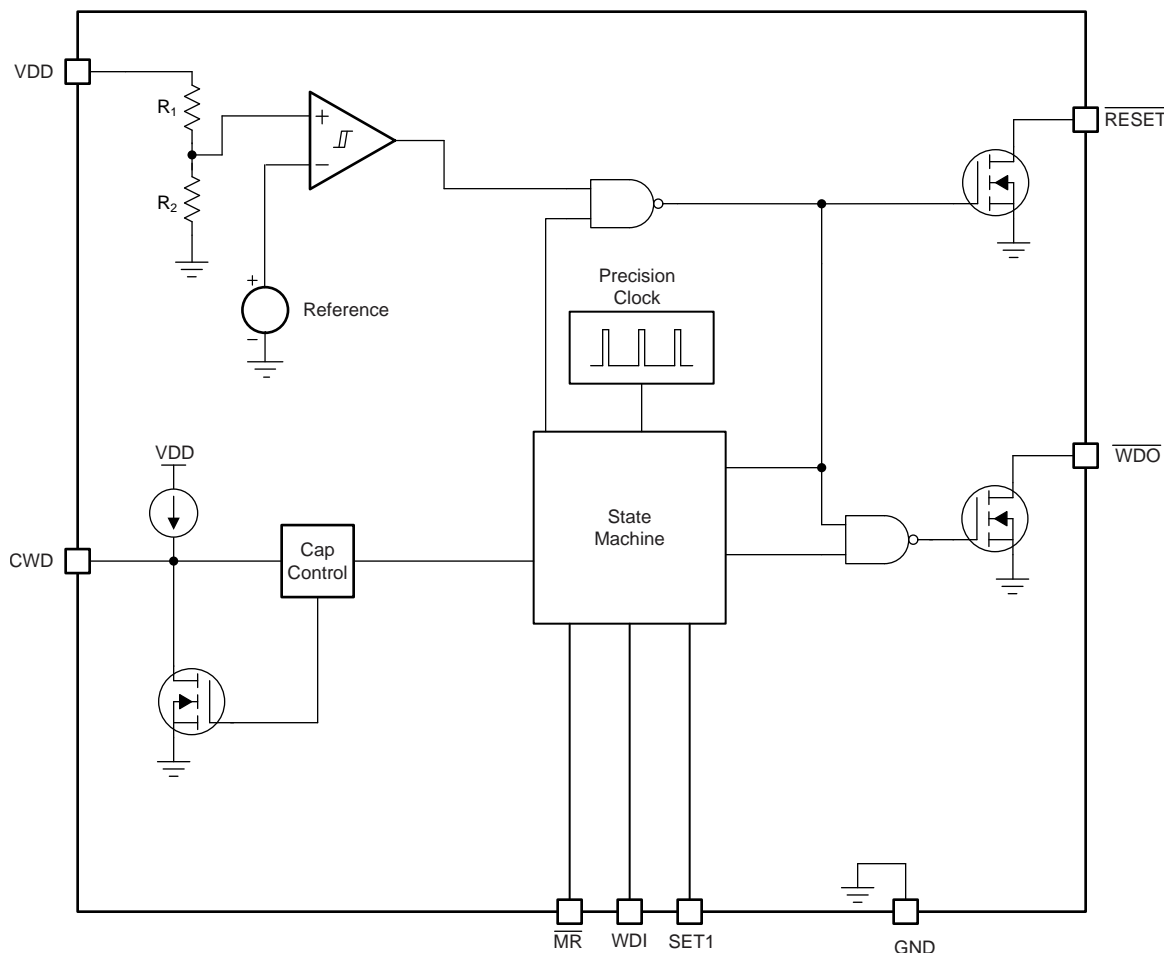

Copyright © 2016, Texas Instruments Incorporated

NOTE:  $R_1 + R_2 = 4.5 \text{ M}\Omega$ .

## 7.3 Feature Description

### 7.3.1 RESET


Connect  $\overline{\text{RESET}}$  to  $V_{PU}$  through a 1-k $\Omega$  to 100-k $\Omega$  pullup resistor.  $\overline{\text{RESET}}$  remains high (deasserted) when  $V_{DD}$  is greater than the negative threshold voltage ( $V_{ITN}$ ). If  $V_{DD}$  falls below the negative threshold ( $V_{ITN}$ ), then  $\overline{\text{RESET}}$  is asserted, driving the  $\overline{\text{RESET}}$  pin to low impedance. When  $V_{DD}$  rises above  $V_{ITN} + V_{HYST}$ , a delay circuit is enabled that holds  $\overline{\text{RESET}}$  low for a specified reset delay period ( $t_{RST}$ ). When the reset delay has elapsed, the  $\overline{\text{RESET}}$  pin goes to a high-impedance state and uses a pullup resistor to hold  $\overline{\text{RESET}}$  high. The pullup resistor must be connected to the desired voltage rail to allow other devices to be connected at the correct interface voltage. To ensure proper voltage levels, give some consideration when choosing the pullup resistor values. The pullup resistor value is determined by output logic low voltage ( $V_{OL}$ ), leakage current ( $I_D$ ), and the current through the  $\overline{\text{RESET}}$  pin  $I_{RESET}$ .

### 7.3.2 Manual Reset ( $\overline{\text{MR}}$ )

The manual reset ( $\overline{\text{MR}}$ ) input allows a processor or other logic circuits to initiate a reset. A logic low on  $\overline{\text{MR}}$  causes  $\overline{\text{RESET}}$  to assert. After  $\overline{\text{MR}}$  returns to a logic high and  $V_{DD}$  is above  $V_{ITN} + V_{HYST}$ ,  $\overline{\text{RESET}}$  is deasserted after the reset delay time ( $t_{RST}$ ). If  $\overline{\text{MR}}$  is not controlled externally, then  $\overline{\text{MR}}$  can either be connected to  $V_{DD}$  or left floating because the  $\overline{\text{MR}}$  pin is internally pulled up. When  $\overline{\text{MR}}$  is asserted, the watchdog is disabled and all signals input to WDI are ignored.

### 7.3.3 Undervoltage Fault Detection

The TPS3852-Q1 features undervoltage detection for common rails between 1.8 V and 5 V. The voltage is monitored on the input rail of the device. If  $V_{DD}$  drops below  $V_{ITN}$ , then  $\overline{\text{RESET}}$  is asserted (driven low). When  $V_{DD}$  is above  $V_{ITN} + V_{HYST}$ ,  $\overline{\text{RESET}}$  deasserts after  $t_{RST}$ , as shown in [Figure 16](#). The internal comparator has built-in hysteresis that provides some noise immunity and ensures stable operation. Although not required in most cases, for noisy applications, good analog design practice is to place a 1-nF to 100-nF bypass capacitor close to the VDD pin to reduce sensitivity to transient voltages on the monitored signal.

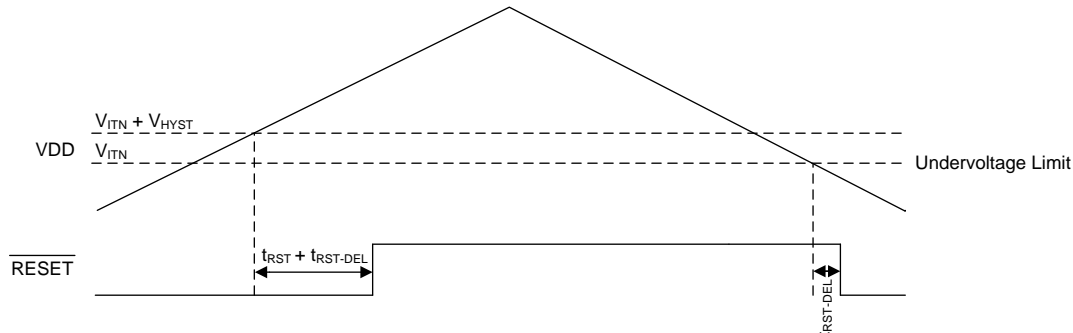

**Figure 16. Undervoltage Detection**


## Feature Description (continued)

### 7.3.4 Watchdog Mode

This section provides information for the watchdog mode of operation.

#### 7.3.4.1 SET1

The SET1 pin can enable and disable the watchdog timer. If SET1 is set to GND, the watchdog timer is disabled and  $\overline{WDO}$  is in a high-impedance state. When the watchdog is disabled,  $\overline{WDO}$  is in a high-impedance state. If the watchdog timer is disabled, drive the WDI pin to either GND or VDD to ensure that there is no increase in  $I_{DD}$ . When SET1 is logic high, the watchdog operates normally. The SET1 pin can be changed dynamically; however, if the watchdog is going from disabled to enabled there is a setup time  $t_{WD-setup}$  where the watchdog does not respond to changes on WDI, as shown in [Figure 17](#).

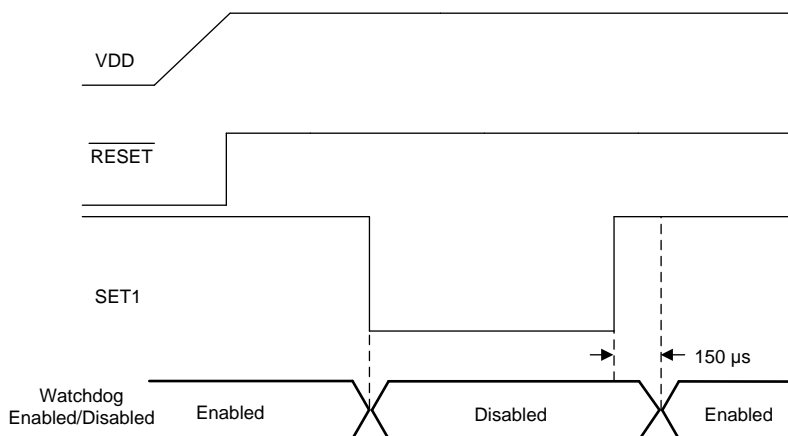

**Figure 17. Enabling and Disabling the Watchdog**

#### 7.3.4.2 Window Watchdog Timer

This section provides information for the window watchdog mode of operation. A window watchdog is typically employed in safety-critical applications where a traditional watchdog timer is inadequate. In a traditional watchdog there is a maximum time in which a pulse must be issued to prevent the reset from occurring. In a window watchdog, the pulse must be issued between a maximum lower window time ( $t_{WDL(max)}$ ) and the minimum upper window time ( $t_{WDU(min)}$ ) set by the CWD pin.

#### 7.3.4.3 Watchdog Input (WDI)

WDI is the watchdog timer input that controls the  $\overline{WDO}$  output. The WDI input is triggered by the falling edge of the input signal. For the first pulse, the watchdog acts as a traditional watchdog timer; thus, the first pulse must be issued before  $t_{WDU(min)}$ . After the first pulse, to ensure proper functionality of the watchdog timer, always issue the WDI pulse within the window of  $t_{WDL(max)}$  and  $t_{WDU(min)}$ . If the pulse is issued in this region, then  $\overline{WDO}$  remains unasserted. Otherwise the device asserts  $\overline{WDO}$ , putting the  $\overline{WDO}$  pin into a low-impedance state.

The watchdog input (WDI) is a digital pin. In order to ensure there is no increase in  $I_{DD}$ , drive the WDI pin to either VDD or GND at all times. Putting the pin to an intermediate voltage can cause an increase in supply current ( $I_{DD}$ ) because of the architecture of the digital logic gates. When  $\overline{RESET}$  is asserted, the watchdog is disabled and all signals input to WDI are ignored. When  $\overline{RESET}$  is no longer asserted, the device resumes normal operation and no longer ignores the signal on WDI. If the watchdog is disabled, drive the WDI pin to either VDD or GND.

## Feature Description (continued)

### 7.3.4.4 CWD

The CWD pin provides the functionality of both high-precision, factory-programmed window watchdog timing options and user-programmable window watchdog timing. The CWD pin can be either pulled up to  $V_{DD}$  through a resistor, have an external capacitor to ground, or be left floating. Every time that the device issues a reset event and the supply voltage is above  $V_{ITN}$ , the device tries to determine which of these three options is connected to the pin. There is an internal state machine that the device goes through to determine which option is connected to the CWD pin. The state machine can take up to 381  $\mu$ s to determine if the CWD pin is left floating, pulled-up through a resistor, or connected to a capacitor.

If the CWD pin is being pulled up to  $V_{DD}$  using a pullup resistor, then use a 10-k $\Omega$  resistor.

### 7.3.4.5 Watchdog Output ( $\overline{WDO}$ )

The TPS3852-Q1 features a window watchdog with an independent watchdog output ( $\overline{WDO}$ ). The independent watchdog output gives the flexibility to flag when there is a fault in the watchdog timing without performing an entire system reset. For legacy applications,  $\overline{WDO}$  can be tied to  $\overline{RESET}$ . When the  $\overline{RESET}$  output is not asserted, the  $\overline{WDO}$  signal maintains normal operation. However, when the  $\overline{RESET}$  signal is asserted, the  $\overline{WDO}$  pin goes to a high-impedance state. This is due to using the standard  $\overline{RESET}$  timing options when a fault occurs on  $\overline{WDO}$ . When  $\overline{RESET}$  is unasserted, the window watchdog timer resumes normal operation.

## 7.4 Device Functional Modes

表 1 summarises the functional modes of the TPS3852-Q1.

**表 1. Device Functional Modes**

$V_{DD}$	WDI	$\overline{WDO}$	$\overline{RESET}$
$V_{DD} < V_{POR}$	—	—	Undefined
$V_{POR} \leq V_{DD} < V_{DD(min)}$	Ignored	High	Low
$V_{DD(min)} \leq V_{DD} \leq V_{ITN} + V_{HYST}^{(1)}$	Ignored	High	Low
$V_{DD} > V_{ITN}^{(2)}$	$t_{WDL(max)} < t_{PULSE} < t_{WDU(min)}^{(3)}$	High	High
	$t_{PULSE} > t_{WDU(min)}^{(3)}$	Low	High
	$t_{PULSE} < t_{WDL(max)}^{(3)}$	Low	High

(1) Only valid before  $V_{DD}$  goes above  $V_{ITN} + V_{HYST}$ .

(2) Only valid after  $V_{DD}$  goes above  $V_{ITN} + V_{HYST}$ .

(3) Where  $t_{PULSE}$  is the time between the falling edges on WDI.

### 7.4.1 $V_{DD}$ is Below $V_{POR}$ ( $V_{DD} < V_{POR}$ )

When  $V_{DD}$  is less than  $V_{POR}$ ,  $\overline{RESET}$  is undefined and can be either high or low. The state of  $\overline{RESET}$  largely depends on the load that the  $\overline{RESET}$  pin is experiencing.

### 7.4.2 Above Power-On-Reset, But Less Than $V_{DD(min)}$ ( $V_{POR} \leq V_{DD} < V_{DD(min)}$ )

When the voltage on  $V_{DD}$  is less than  $V_{DD(min)}$  and greater than or equal to  $V_{POR}$ , the  $\overline{RESET}$  signal is asserted (logic low). When  $\overline{RESET}$  is asserted, the watchdog output  $\overline{WDO}$  is in a high-impedance state regardless of the WDI signal that is input to the device.

### 7.4.3 Normal Operation ( $V_{DD} \geq V_{DD(min)}$ )

When  $V_{DD}$  is greater than or equal to  $V_{DD(min)}$ , the  $\overline{RESET}$  signal is determined by  $V_{DD}$ . When  $\overline{RESET}$  is asserted,  $\overline{WDO}$  goes to a high-impedance state.  $\overline{WDO}$  is then pulled high through the pullup resistor.

## 8 Application and Implementation


### 注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

#### 8.1.1 CWD Functionality

The TPS3852-Q1 features three options for setting the watchdog window: connecting a capacitor to the CWD pin, connecting a pullup resistor to VDD, and leaving the CWD pin unconnected. [Figure 18](#) shows a schematic drawing of all three options. If this pin is connected to VDD through a 10-k $\Omega$  pullup resistor or left unconnected (high impedance), then the factory-programmed watchdog timeouts are enabled; see the [Timing Requirements](#) table. Otherwise, the watchdog timeout can be adjusted by placing a capacitor from the CWD pin to ground.

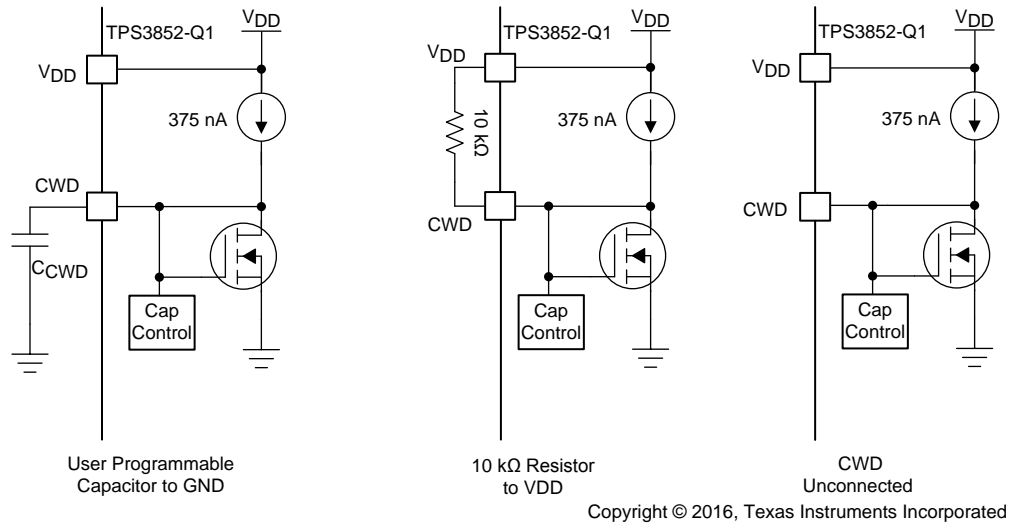

**Figure 18. CWD Charging Circuit**

##### 8.1.1.1 Factory-Programmed Timing Options

If using the factory-programmed timing options (listed in [Table 2](#)), the CWD pin must either be unconnected or pulled up to VDD through a 10-k $\Omega$  pullup resistor. Using these options enables high-precision watchdog timing.

**Table 2. Factory-Programmed Watchdog Timing**

INPUT		WATCHDOG LOWER BOUNDARY ( $t_{WDL}$ )			WATCHDOG UPPER BOUNDARY ( $t_{WDU}$ )			UNIT
CWD	SET1	MIN	TYP	MAX	MIN	TYP	MAX	
NC	0	Watchdog disabled			Watchdog disabled			
	1	680	800	920	1360	1600	1840	ms
10 k $\Omega$ to VDD	0	Watchdog disabled			Watchdog disabled			
	1	1.48	1.85	2.22	9.35	11.0	12.65	ms



### 8.1.1.2 Adjustable Capacitor Timing

Adjustable capacitor timing is achievable by connecting a capacitor to the CWD pin. If a capacitor is connected to CWD, then a 375-nA current source charges  $C_{CWD}$  until  $V_{CWD} = 1.21$  V. The TPS3852-Q1 determines the window watchdog upper boundary with the formula given in 式 1, where  $C_{CWD}$  is in microfarads ( $\mu$ F) and  $t_{WDU}$  is in seconds.

$$t_{WDU(typ)}(s) = 77.4 \times C_{CWD}(\mu F) + 0.055 (s) \quad (1)$$

The TPS3852-Q1 is limited to using  $C_{CWD}$  capacitors between 100 pF and 1  $\mu$ F. Note that 式 1 is for ideal capacitors; capacitor tolerances cause the actual device timing to vary. For the most accurate timing, use ceramic capacitors with COG dielectric material. As shown in 表 3, when using the minimum capacitance of 100 pF, the watchdog upper boundary is 62.74 ms; whereas with a 1- $\mu$ F capacitance, the watchdog upper boundary is 77.455 seconds. If a  $C_{CWD}$  capacitor is used, 式 1 can be used to set the window watchdog upper boundary ( $t_{WDU}$ ). 表 4 shows how  $t_{WDL}$  can be used to calculate  $t_{WDL}$ .

**表 3.  $t_{WDU}$  Values for Common Ideal Capacitor Values**

$C_{CWD}$	WATCHDOG UPPER BOUNDARY ( $t_{WDU}$ )			UNIT
	MIN <sup>(1)</sup>	TYP	MAX <sup>(1)</sup>	
100 pF	53.32	62.74	72.15	ms
1 nF	112.5	132.4	152.2	ms
10 nF	704	829	953	ms
100 nF	6625	7795	8964	ms
1 $\mu$ F	65836	77455	89073	ms

(1) Minimum and maximum values are calculated using ideal capacitors.

**表 4. Programmable CWD Timing**

INPUT		WATCHDOG LOWER BOUNDARY ( $t_{WDL}$ )			WATCHDOG UPPER BOUNDARY ( $t_{WDU}$ )			UNIT
CWD	SET1	MIN	TYP	MAX	MIN	TYP	MAX	
$C_{CWD}$	0	Watchdog disabled			Watchdog disabled			
	1	$t_{WDL(min)} \times 0.5$	$t_{WDL} \times 0.5$	$t_{WDL(max)} \times 0.5$	$0.85 \times t_{WDU(typ)}$	$t_{WDU(typ)}^{(1)}$	$1.15 \times t_{WDU(typ)}$	s

(1) Calculated from 式 1 using ideal capacitors.


### 8.1.2 Overdrive Voltage

Forcing a  $\overline{\text{RESET}}$  is dependent on two conditions: the amplitude  $V_{DD}$  is beyond the trip point ( $\Delta V_1$  and  $\Delta V_2$ ), and the length of time that the voltage is beyond the trip point for a long period of time,  $\overline{\text{RESET}}$  asserts and the output is pulled low. However, if  $V_{DD}$  is just under the trip point for a few nanoseconds,  $\overline{\text{RESET}}$  does not assert and the output remains high. The length of time required for  $\overline{\text{RESET}}$  to assert can be changed by increasing the amount  $V_{DD}$  goes under the trip point. If  $V_{DD}$  is under the trip point by 10%, the amount of time required for the comparator to respond is much faster and causes  $\overline{\text{RESET}}$  to assert much quicker than when barely under the trip point voltage. 式 2 shows how to calculate the percentage overdrive.

$$\text{Overdrive} = | (V_{DD} / V_{ITX} - 1) \times 100\% | \quad (2)$$

In 式 2,  $V_{ITX}$  corresponds to the threshold trip point. If  $V_{DD}$  is exceeding the positive threshold,  $V_{ITN} + V_{HYST}$  is used.  $V_{ITN}$  is used when  $V_{DD}$  is falling below the negative threshold. In 图 19,  $t_1$  and  $t_2$  correspond to the amount of time that  $V_{DD}$  is over the threshold; the propagation delay versus overdrive for  $V_{ITN}$  and  $V_{ITN} + V_{HYST}$  is illustrated in 图 13 and 图 14, respectively.

The TPS3852-Q1 is relatively immune to short positive and negative transients on VDD because of the overdrive voltage.

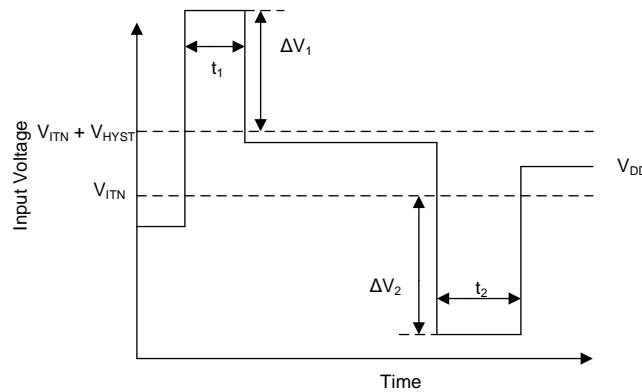


Copyright © 2016, Texas Instruments Incorporated

**图 19. Overdrive Voltage**

## 8.2 Typical Application

A typical application for the TPS3852-Q1 is shown in [Figure 20](#). The TPS3852G33-Q1 is used to monitor the 3.3-V, V<sub>CORE</sub> rail powering the microcontroller.

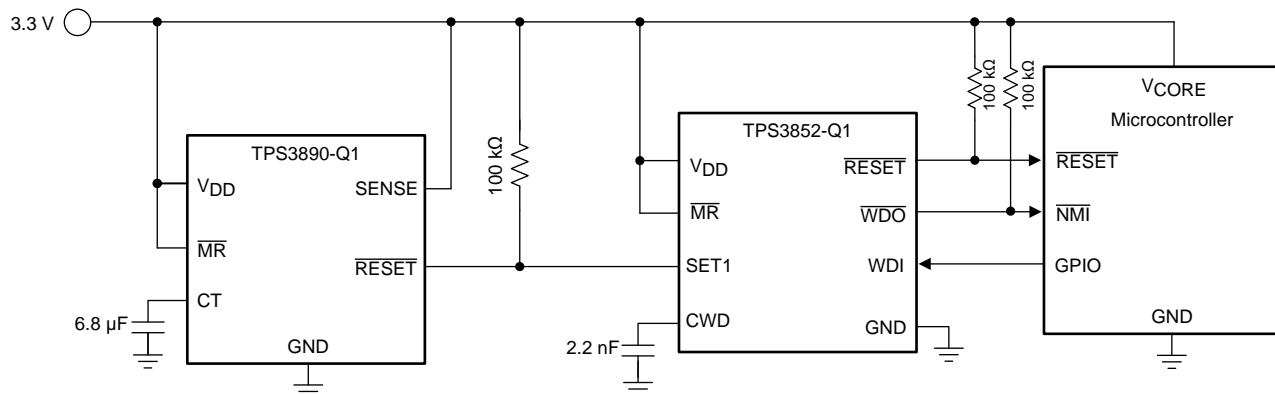

Copyright © 2016, Texas Instruments Incorporated

**Figure 20. Monitoring Supply Voltage and Watchdog Supervision of a Microcontroller**

### 8.2.1 Design Requirements

PARAMETER	DESIGN REQUIREMENT	DESIGN RESULT
Watchdog disable for initialization period	Watchdog must remain disabled for 7 seconds until logic enables the watchdog timer	7.21 seconds (typ)
Output logic voltage	3.3-V CMOS	3.3-V CMOS
Monitored rail	3.3 V with a 5% threshold	Worst-case V <sub>ITN</sub> = 3.142 V (–4.7% threshold)
Watchdog window	250 ms, maximum	t <sub>WDL(max)</sub> = 135 ms, t <sub>WDU(min)</sub> = 181 ms
Maximum device current consumption	50 µA	52 µA (worst-case) when $\overline{\text{RESET}}$ or $\overline{\text{WDO}}$ is asserted <sup>(1)</sup>

(1) Only includes the TPS3852G33-Q1 current consumption.

### 8.2.2 Detailed Design Procedure


#### 8.2.2.1 Monitoring the 3.3-V Rail

This application calls for very tight monitoring of the rail with only 5% of variation allowed on the rail. To ensure this requirement is met, the TPS3852G33-Q1 was chosen for its –4% threshold. To calculate the worst-case for V<sub>ITN</sub>, the accuracy must also be taken into account. The worst-case for V<sub>ITN</sub> can be calculated by [Equation 3](#):

$$V_{ITN(\text{Worst-Case})} = V_{ITN(\text{typ})} \times 0.992 = 3.3 \times 0.96 \times 0.992 = 3.142 \text{ V} \quad (3)$$

### 8.2.2.2 Calculating $\overline{\text{RESET}}$ and the $\overline{\text{WDO}}$ Pullup Resistor

The TPS3852-Q1 uses an open-drain configuration for the  $\overline{\text{RESET}}$  circuit, as shown in [Figure 21](#). When the FET is off, the resistor pulls the drain of the transistor to VDD and when the FET is turned on, the FET attempts to pull the drain to ground, thus creating an effective resistor divider. The resistors in this divider must be chosen to ensure that  $V_{OL}$  is below the maximum value. To choose the proper pullup resistor, there are three key specifications to keep in mind: the pullup voltage ( $V_{PU}$ ), the recommended maximum  $\overline{\text{RESET}}$  pin current ( $I_{\overline{\text{RESET}}}$ ), and  $V_{OL}$ . The maximum  $V_{OL}$  is 0.4 V, meaning that the effective resistor divider created must be able to bring the voltage on the reset pin below 0.4 V with  $I_{\overline{\text{RESET}}}$  kept below 10 mA. For this example, with a  $V_{PU}$  of 3.3 V, a resistor must be chosen to keep  $I_{\overline{\text{RESET}}}$  below 50  $\mu\text{A}$  because this value is the maximum consumption current allowed. To ensure this specification is met, a pullup resistor value of 100 k $\Omega$  was selected, which sinks a maximum of 33  $\mu\text{A}$  when  $\overline{\text{RESET}}$  or  $\overline{\text{WDO}}$  is asserted. As illustrated in [Figure 11](#), when the  $\overline{\text{RESET}}$  current is at 33  $\mu\text{A}$  the low-level output voltage is approximately zero.



Copyright © 2016, Texas Instruments Incorporated

**Figure 21.  $\overline{\text{RESET}}$  Open-Drain Configuration**

### 8.2.2.3 Setting the Window Watchdog

As illustrated in [Figure 18](#), there are three options for setting the window watchdog. The design specifications in this application require the programmable timing option (external capacitor connected to CWD). When a capacitor is connected to the CWD pin, the window is governed by [Equation 4](#). [Equation 4](#) is only valid for ideal capacitors, any temperature or voltage derating must be accounted for separately.

$$C_{\text{CWD}} (\mu\text{F}) = \frac{t_{\text{WDU}} - 0.055}{77.4} = \frac{0.25 - 0.055}{77.4} = 0.0025 \mu\text{F} \quad (4)$$

The nearest standard capacitor value to 2.5 nF is 2.2 nF. Selecting 2.2 nF for the  $C_{\text{CWD}}$  capacitor gives the following minimum and maximum timing parameters:

$$t_{\text{WDU(MIN)}} = 0.85 \times t_{\text{WDU(TYP)}} = 0.85 \times (77.4 \times 2.2 \times 10^{-3} + 0.055) = 191 \text{ ms} \quad (5)$$

$$t_{\text{WDL(MAX)}} = 0.5 \times t_{\text{WDU(MAX)}} = 0.5 \times [1.15 \times (77.4 \times 2.2 \times 10^{-3} + 0.055)] = 129 \text{ ms} \quad (6)$$

Capacitor tolerance also influence  $t_{\text{WDU(MIN)}}$  and  $t_{\text{WDL(MAX)}}$ . Select a ceramic COG dielectric capacitor for high accuracy. For 2.2 nF, COG capacitors are readily available with a 5% tolerance, which results in a 5% decrease in  $t_{\text{WDU(MIN)}}$  and a 5% increase in  $t_{\text{WDL(MAX)}}$ , giving 181 ms and 135 ms, respectively. A falling edge must be issued within this window.

### 8.2.2.4 Watchdog Disabled During Initialization Period





The watchdog is often needed to be disabled during startup to allow for an initialization period. When the initialization period is over, the watchdog timer is turned back on to allow the microcontroller to be monitored by the TPS3852-Q1. To achieve this setup, SET1 must start at GND. In this design, SET1 is controlled by a TPS3890-Q1 supervisor. In this application, the TPS3890-Q1 was chosen to monitor  $V_{DD}$  as well, meaning that  $\overline{\text{RESET}}$  on the TPS3890-Q1 stays low until  $V_{DD}$  rises above  $V_{ITN}$ . When  $V_{DD}$  comes up, the delay time can be adjusted through the CT capacitor on the TPS3890-Q1. With this approach, the  $\overline{\text{RESET}}$  delay can be adjusted from a minimum of 25  $\mu\text{s}$  to a maximum of 30 seconds. For this design, a minimum delay of 7 seconds is needed until the watchdog timer is enabled. The CT capacitor calculation (see the [TPS3890-Q1 data sheet](#)) yields an ideal capacitance of 6.59  $\mu\text{F}$ , giving a closest standard ceramic capacitor value of 6.8  $\mu\text{F}$ . When connecting a 6.8- $\mu\text{F}$  capacitor from CT to GND, the typical delay time is 7.21 seconds. [Figure 22](#) illustrates the typical startup waveform for this circuit when the watchdog input is off. [Figure 22](#) illustrates that when the watchdog is disabled, the  $\overline{\text{WDO}}$  output remains high. See the [TPS3890-Q1 data sheet](#) for detailed information on the TPS3890-Q1.

### 8.2.3 Glitch Immunity

Figure 25 shows the high-to-low glitch immunity for the TPS3852G33-Q1 with a 7% overdrive with  $V_{DD}$  starting at 3.3 V. This curve shows that  $V_{DD}$  can go below the threshold for 5.2  $\mu$ s without RESET asserting.

### 8.2.4 Application Curves

Unless otherwise stated, application curves were taken at  $T_A = 25^\circ\text{C}$ .

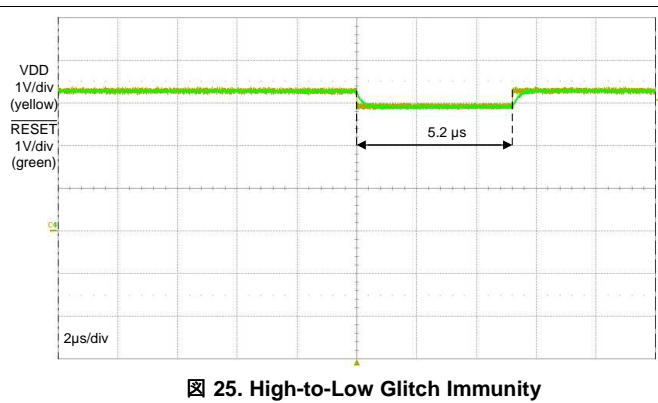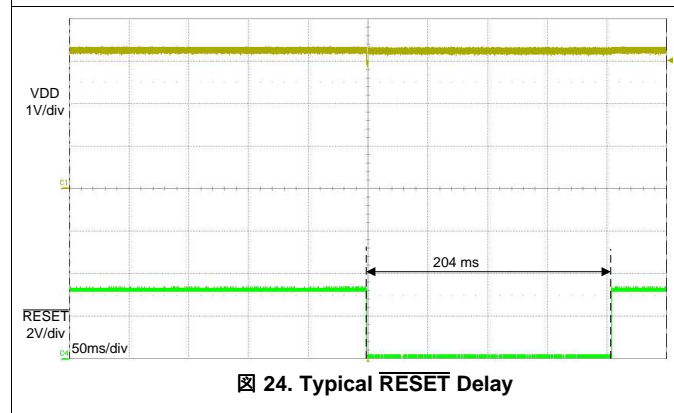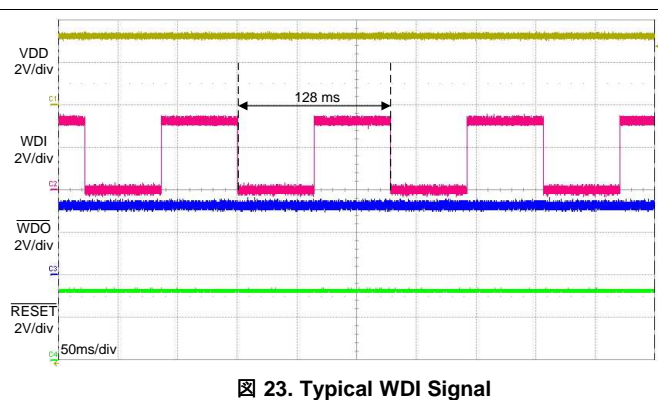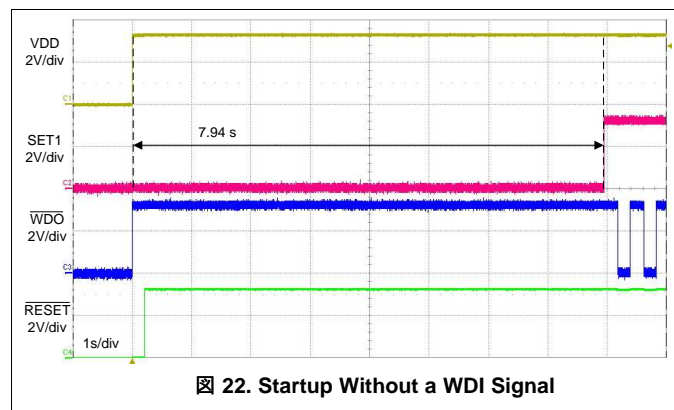

## 9 Power Supply Recommendations


This device is designed to operate from an input supply with a voltage range between 1.6 V and 6.5 V. An input supply capacitor is not required for this device; however, if the input supply is noisy, then good analog practice is to place a 0.1- $\mu$ F capacitor between the VDD pin and the GND pin.

## 10 Layout

### 10.1 Layout Guidelines

- Make sure that the connection to the VDD pin is low impedance. Good analog design practice is to place a 0.1- $\mu$ F ceramic capacitor as near as possible to the VDD pin.
- If a  $C_{CWD}$  capacitor or pull-up resistor is used, place these components as close as possible to the CWD pin. If the CWD pin is left unconnected, make sure to minimize the amount of parasitic capacitance on the pin.
- Place the pullup resistors on  $\overline{\text{RESET}}$  and  $\overline{\text{WDO}}$  as close to the pin as possible.

### 10.2 Layout Example

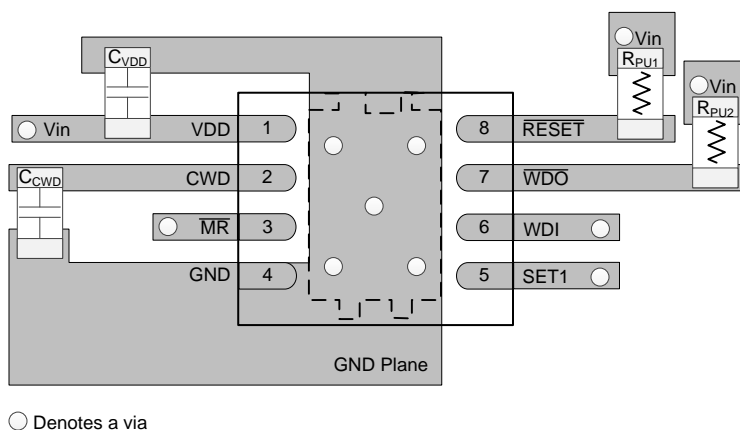

ⓧ 26. Typical Layout for the TPS3852-Q1

## 11 デバイスおよびドキュメントのサポート

### 11.1 デバイス・サポート

#### 11.1.1 開発サポート

##### 11.1.1.1 評価モジュール

[TPS3851EVM-780評価モジュール](#)は、この部品の評価に使用できます。この評価モジュールを使用する場合、EVM上のデバイスをTPS3852-Q1に変更する必要があります。

#### 11.1.2 デバイスの項目表記

**表 5. デバイスの項目表記**

説明	項目表記	値
TPS3852 (ウィンドウ・ウォッチドッグ付きの高精度スーパーバイザ)	—	—
X (公称スレッショルド: 監視対象の公称電圧の百分率)	G	$V_{ITN} = -4\%$
	H	$V_{ITN} = -7\%$
yy(y) <sup>(1)</sup> (監視対象の公称電圧のオプション)	18	1.8V
	33	3.3V

(1) たとえば、TPS3852G33QDRBQ1は監視対象の公称電圧3.3V、公称スレッショルド-4%を意味します。

### 11.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](http://ti.com)のデバイス製品フォルダを開いてください。右上の隅にある「通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

### 11.3 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™オンライン・コミュニティ** *TIのE2E (Engineer-to-Engineer) コミュニティ*。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることができます。

**設計サポート** *TIの設計サポート* 役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

### 11.4 商標

E2E is a trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 11.5 静電気放電に関する注意事項



すべての集積回路は、適切なESD保護方法を用いて、取扱いと保存を行うようにして下さい。

静電気放電はわずかな性能の低下から完全なデバイスの故障に至るまで、様々な損傷を与えます。高精度の集積回路は、損傷に対して敏感であり、極めてわずかなパラメータの変化により、デバイスに規定された仕様に適合しなくなる場合があります。

### 11.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。



## PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS3852G18QDRBRQ1	ACTIVE	SON	DRB	8	3000	RoHS & Green	NIPDAU   SN	Level-2-260C-1 YEAR	-40 to 125	852DB	<a href="#">Samples</a>
TPS3852G33QDRBRQ1	ACTIVE	SON	DRB	8	3000	RoHS & Green	NIPDAU   SN	Level-2-260C-1 YEAR	-40 to 125	852GB	<a href="#">Samples</a>
TPS3852H18QDRBRQ1	ACTIVE	SON	DRB	8	3000	RoHS & Green	NIPDAU   SN	Level-2-260C-1 YEAR	-40 to 125	852LB	<a href="#">Samples</a>
TPS3852H33QDRBRQ1	ACTIVE	SON	DRB	8	3000	RoHS & Green	NIPDAU   SN	Level-2-260C-1 YEAR	-40 to 125	852PB	<a href="#">Samples</a>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TPS3852-Q1 :**

- Catalog : [TPS3852](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

**DRB 8**

**GENERIC PACKAGE VIEW**


**VSON - 1 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD



Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4203482/L

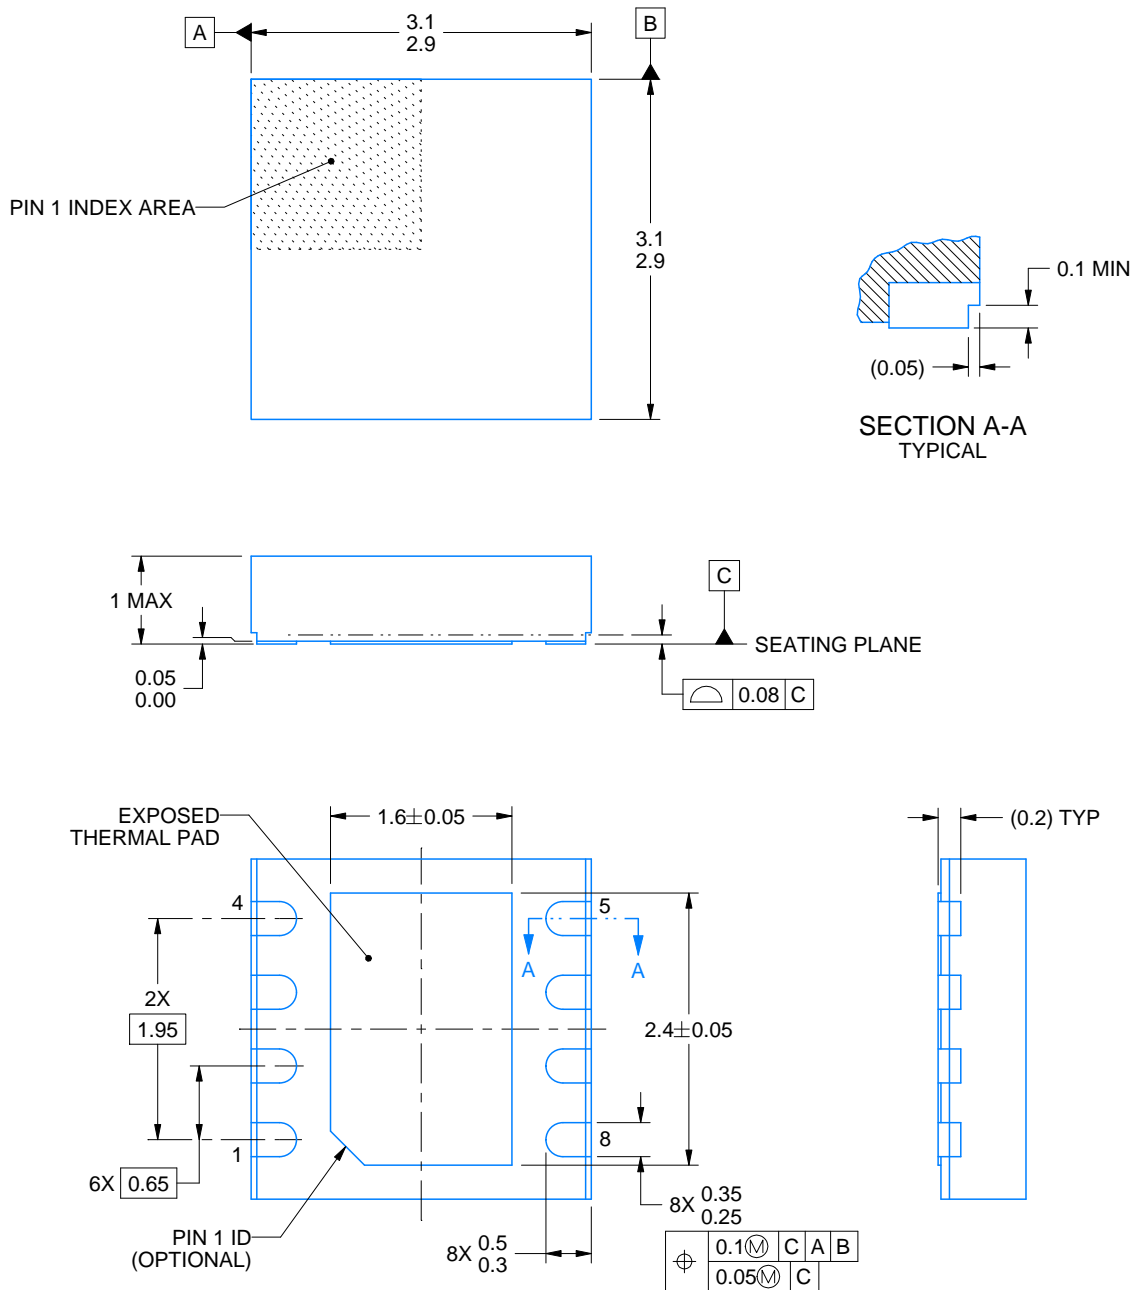

4222121/C 10/2016


## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.


**DRB0008F**

**VSON - 1 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

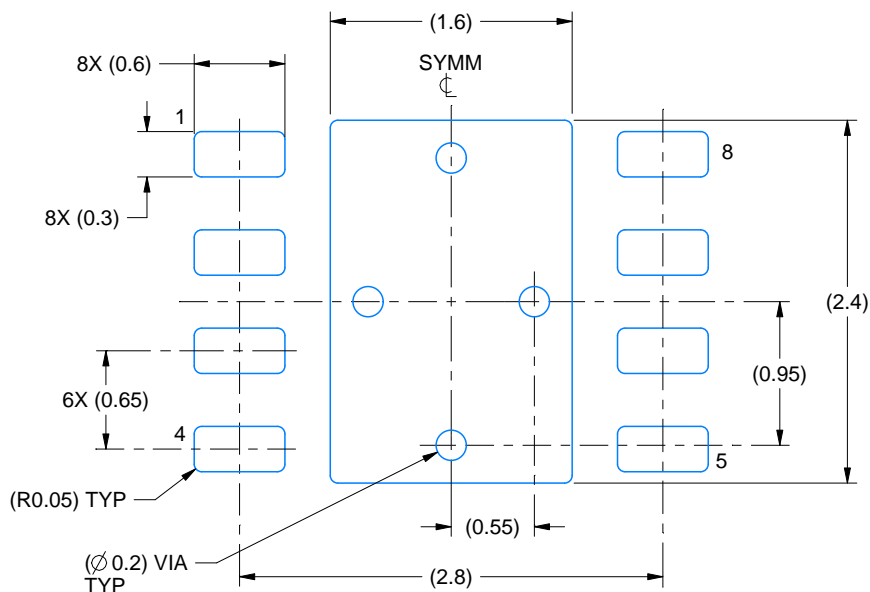

LAND PATTERN EXAMPLE  
SCALE:20X

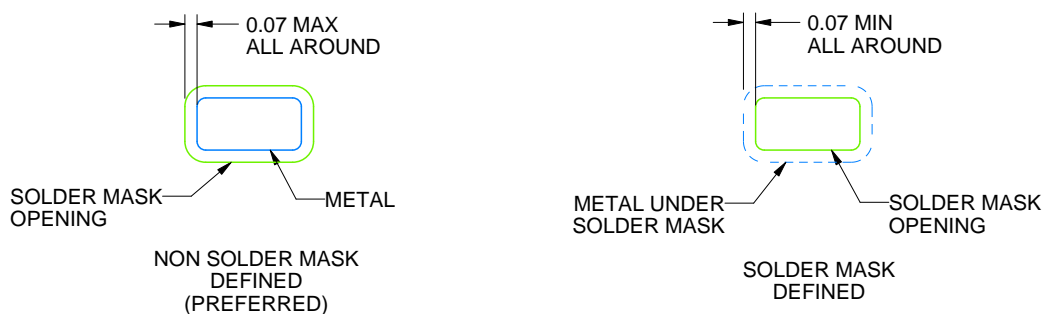

## SOLDER MASK DETAILS

4222121/C 10/2016

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

DRB0008F

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

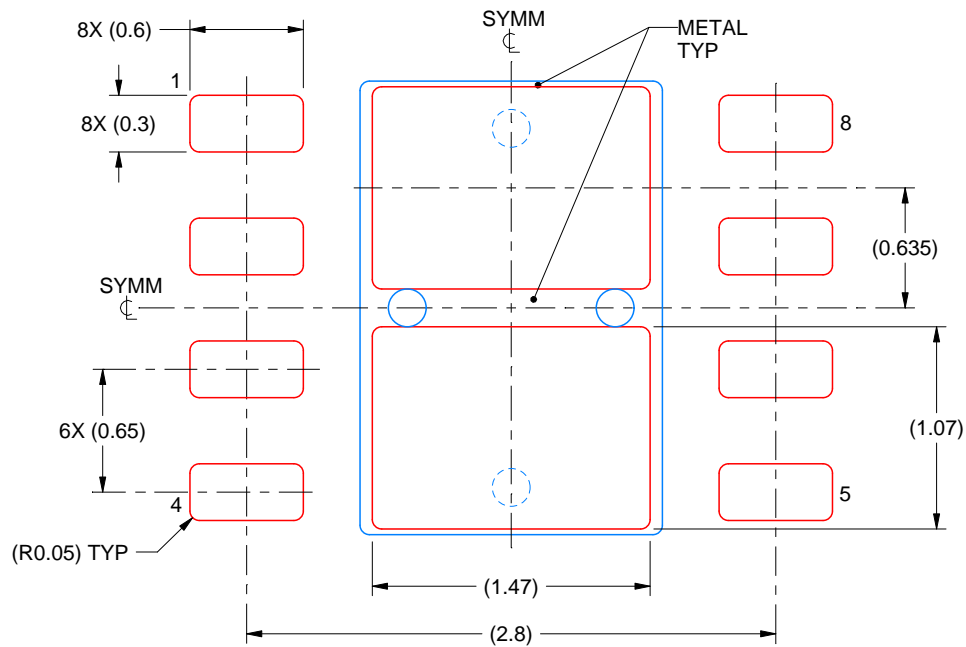


SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD  
82% PRINTED SOLDER COVERAGE BY AREA  
SCALE:25X

4222121/C 10/2016

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

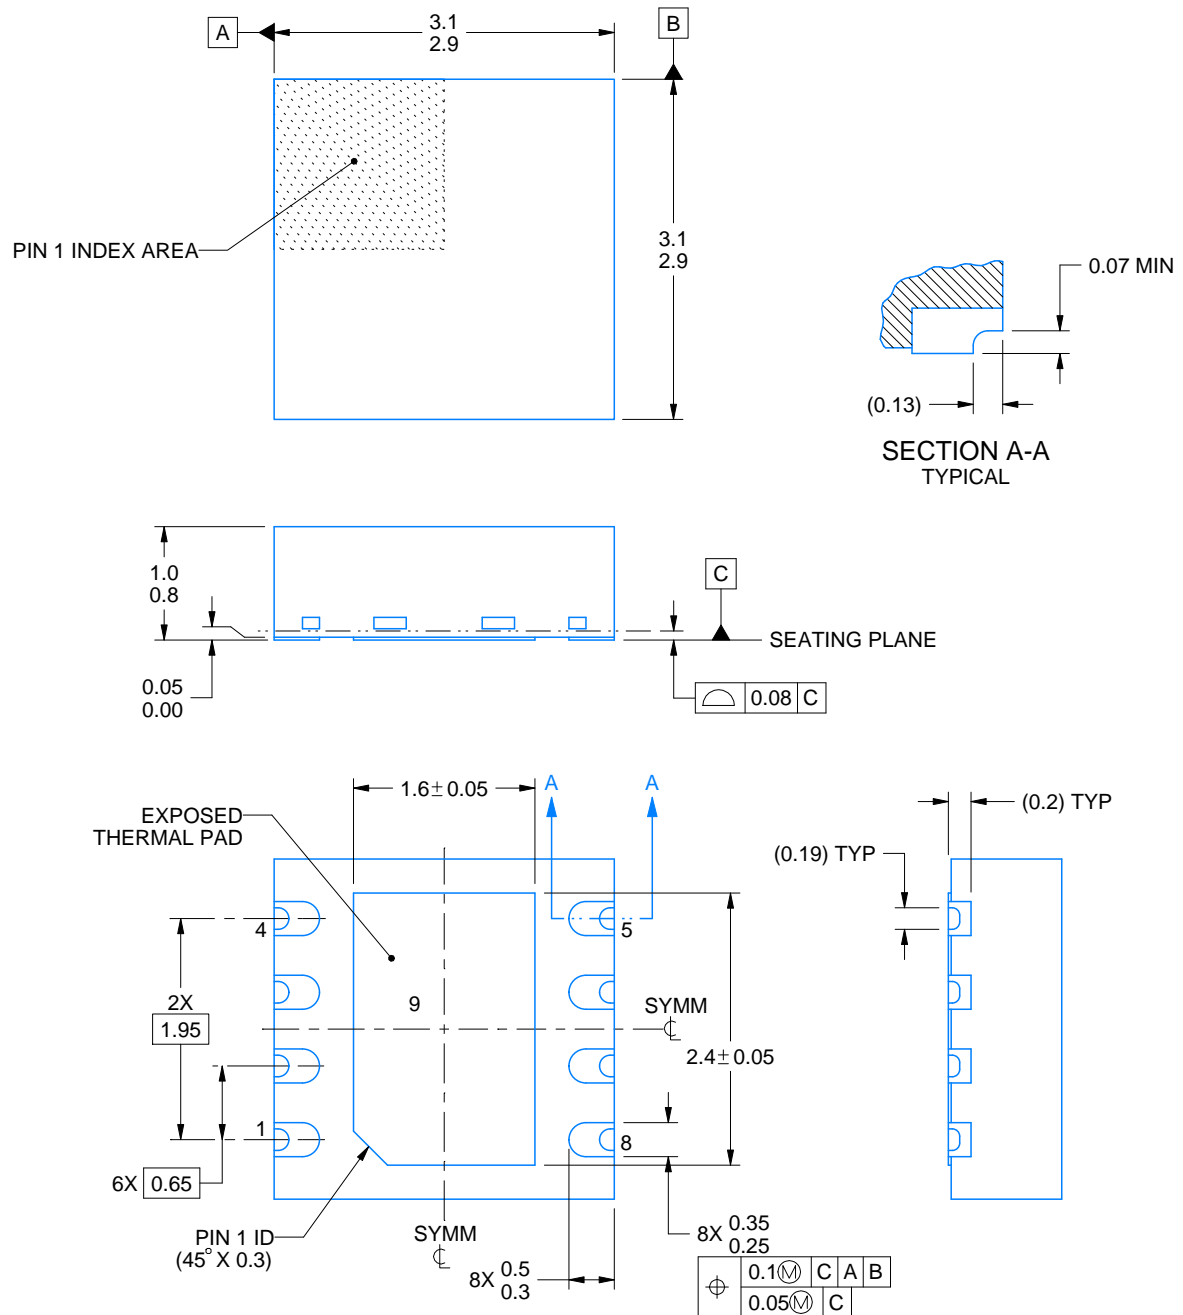

4227074/D 08/2022

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT



DRB0008K

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

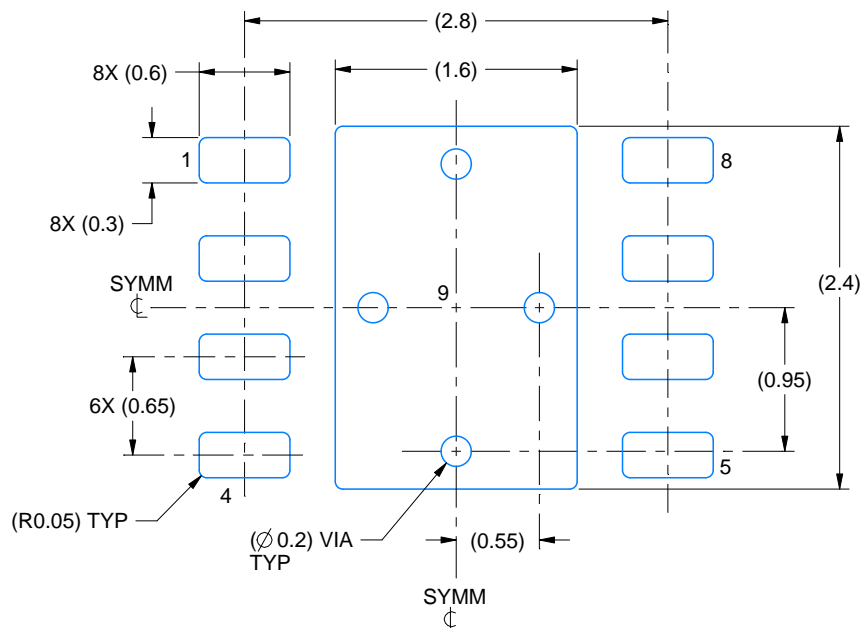

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:20X

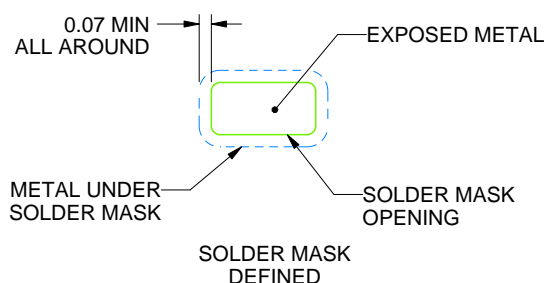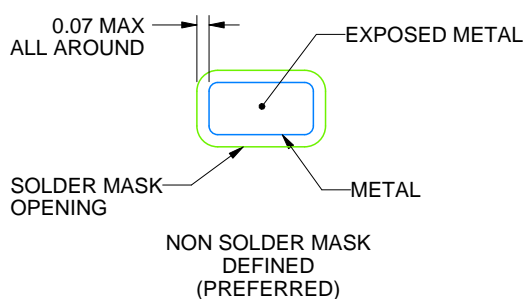

SOLDER MASK DETAILS

4227074/D 08/2022

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).

5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.




## EXAMPLE STENCIL DESIGN

DRB0008K

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

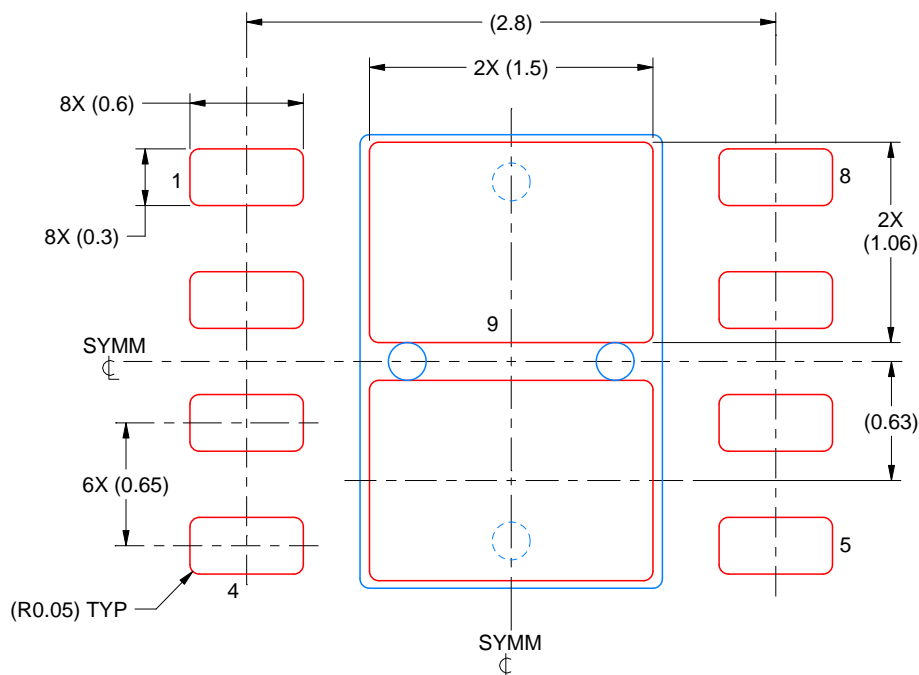

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:  
80% PRINTED SOLDER COVERAGE BY AREA  
SCALE:25X

4227074/D 08/2022

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス・デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとしします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、または [ti.com](#) やかかる TI 製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、TI はそれらに異議を唱え、拒否します。

郵送先住所 : Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2023, Texas Instruments Incorporated