

The bq27426 Performance Under Dynamic Battery Voltage for Portable Audio Applications

Nabil Mohammad

ABSTRACT

In this application note, the state of charge (SOC) accuracy of the bq27426 Impedance Track™ fuel gauge is demonstrated under dynamic loading typically found in audio applications.

Audio signals, especially in music, contain non-uniform signals with frequency components typically ranging from 20 Hz to 20 kHz. In portable mid-power audio applications, amplifiers are capable of driving low impedance speakers with power levels above 1 W to 2 W. Therefore, fluctuation levels of the battery current draw can be significant and the battery voltage will not be steady throughout the discharge; this makes predicting the battery life or state of charge (SOC) via the traditional voltage-based ADC method, unreliable.

The bq27426 battery fuel gauge uses the patented (IT) Impedance Track™ algorithm designed for battery gauging and allows the device to report information such as remaining capacity (mAh), SOC (%), and battery voltage (mV). In this document, it is shown how the gauge would perform in portable audio speakers where the battery voltage and current fluctuate under dynamic loading.

Trademarks

Impedance Track is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

1 Experiment Setup

Most portable audio speakers utilize a class D amplifier in their output power stage. Its major advantage over the traditional class AB topology is its high efficiency and low power dissipation. In this experiment the EVM of the TPA3140D2 inductor-less 10-W stereo class D audio amplifier is used. A single cell lithium-ion battery with a capacity of 3080 mAh and nominal voltage of 3.85 V is used as the power source. The amplifier IC operating supply voltage is ranged between 4.5 V to 14.4 V; because the battery voltage falls below this range a TPS61178EVM-792 boost converter is used and configured to step up the battery voltage to a fixed 10.25 V. The battery (+) and (-) terminals are connected to the Pack(+) and Pack(-) terminals of the bq27426EVM and its Load(+) and Load(-) terminals are connected to the input terminals of the TPS61178EVM-792 boost converter. Prior to the setup, the bq27426 had been configured to the appropriate chemID and a successful learning cycle was performed. Also, an EV2400 is used to communicate between the PC and bq27426EVM. The PC runs bqStudios, a software used to interact with the gauge and log information stored in its register. A smartphone is used as the audio input source and is connected to the LIN and RIN ports of the TPA3140D2-EVM through a AUX-to-RCA cable. The experiment setup is shown in [Figure 1](#).

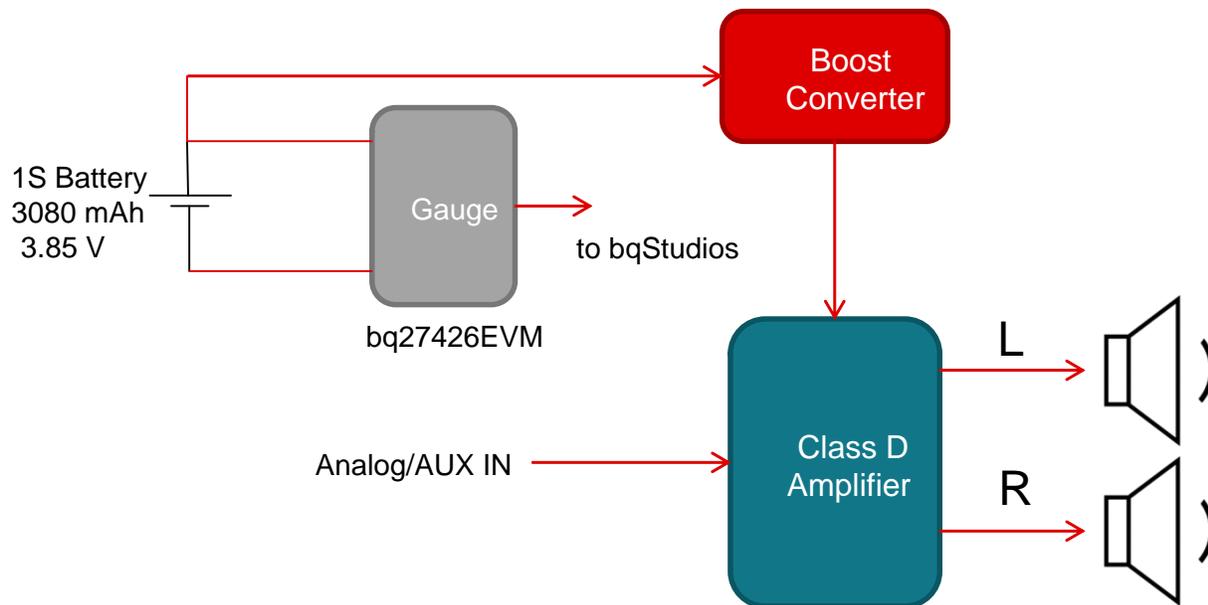


Figure 1. Setup Block Diagram

2 Experiment Run

Once everything is wired up, the music playlist is played from the smartphone and the gauge's registers are logged using bqStudio. Starting from a fully charged battery, the playlist is run until SOC hits 0%, indicating the battery has no useable capacity left.

3 Experimental Data

Once the cell is discharged to empty, the logging is stopped. A plot depicting the logged register of battery voltage (mV) versus elapsed time (seconds) is shown in [Figure 2](#).

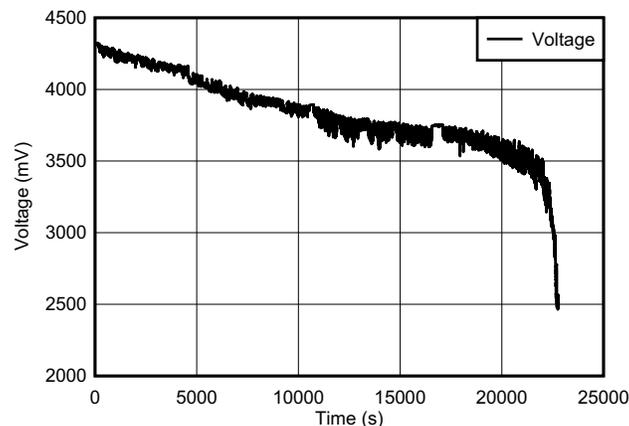


Figure 2. Reported Battery Voltage (mV) vs Elapsed Time (Seconds)

From the plot, it can be observed that the battery voltage is highly dynamic; therefore, gauging this performance using the traditional voltage-based ADC method would prove itself to be inconsistent and fallible. But despite the large fluctuations, the bq27426, using the IT algorithm, does a robust job in reporting accurate SOC or state of charge levels. Using the other registers, such as elapsed time and average current, the true SOC values can be calculated. In [Figure 3](#), the gauge reported SOC is compared with true SOC values.

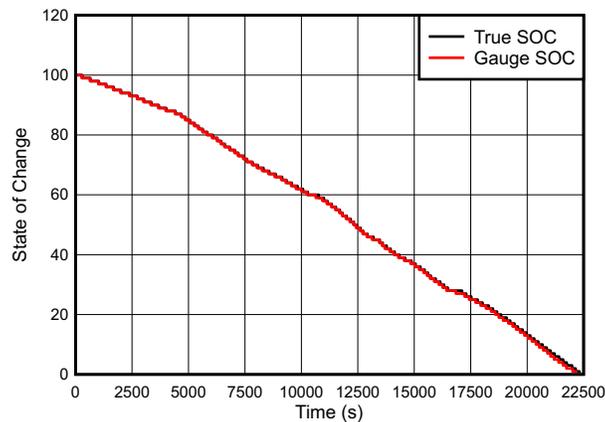


Figure 3. Reported SOC vs. True SOC Under Highly Dynamic Battery Voltage and Current

4 Summary

From the logged data, it is evident that the bq27426 does a robust job in maintaining a steady and accurate SOC reporting despite the high variations in battery voltage. The traditional voltage-based ADC technique would not work with such fluctuating and dynamic battery voltage. The bq27426 as well as other IT fuel gauges are highly suitable for low, mid or high power portable audio applications.

5 References

For more information about the bq27426, refer to the device product page:

- <http://www.ti.com/product/BQ27426>

IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2017, Texas Instruments Incorporated