


## Automotive Non-Synchronous Buck – 13.2V @ 2.0A

- Input 16..34V DC
- Output 13.2V @ 2.0A
- Converter TPS54260
- Free-Running switching frequency of 400 kHz
- Working in continuous conduction mode
- Modified TPS54260EVM-597

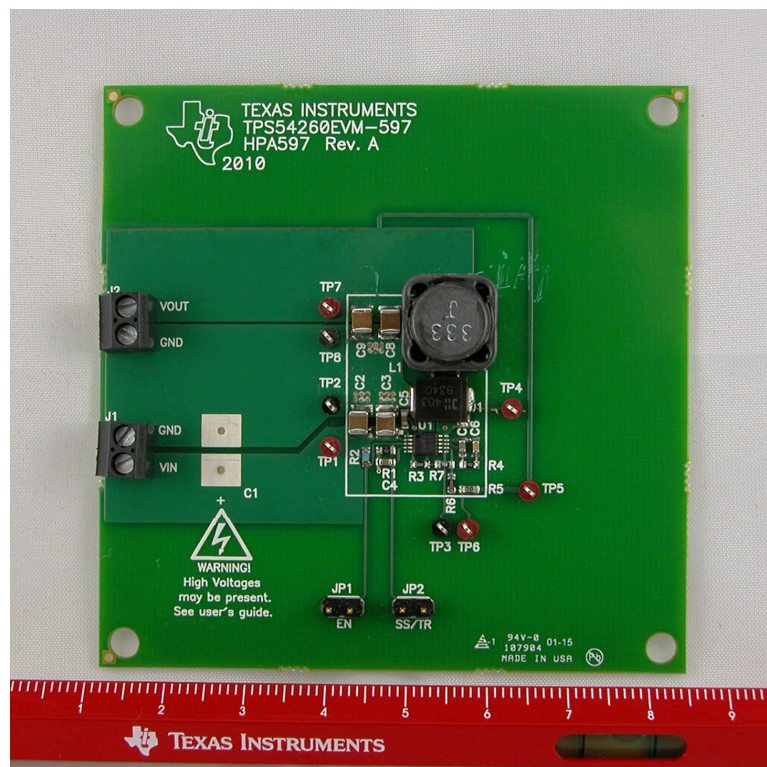

## 1 Startup

The startup waveform is shown in Figure 1. The input voltage is set at 24.0V, with no load on the 13.2V output.

Channel C1: **24.0V Input voltage**  
5V/div, 10ms/div

Channel C2: **13.2V Output voltage**  
5V/div, 10ms/div

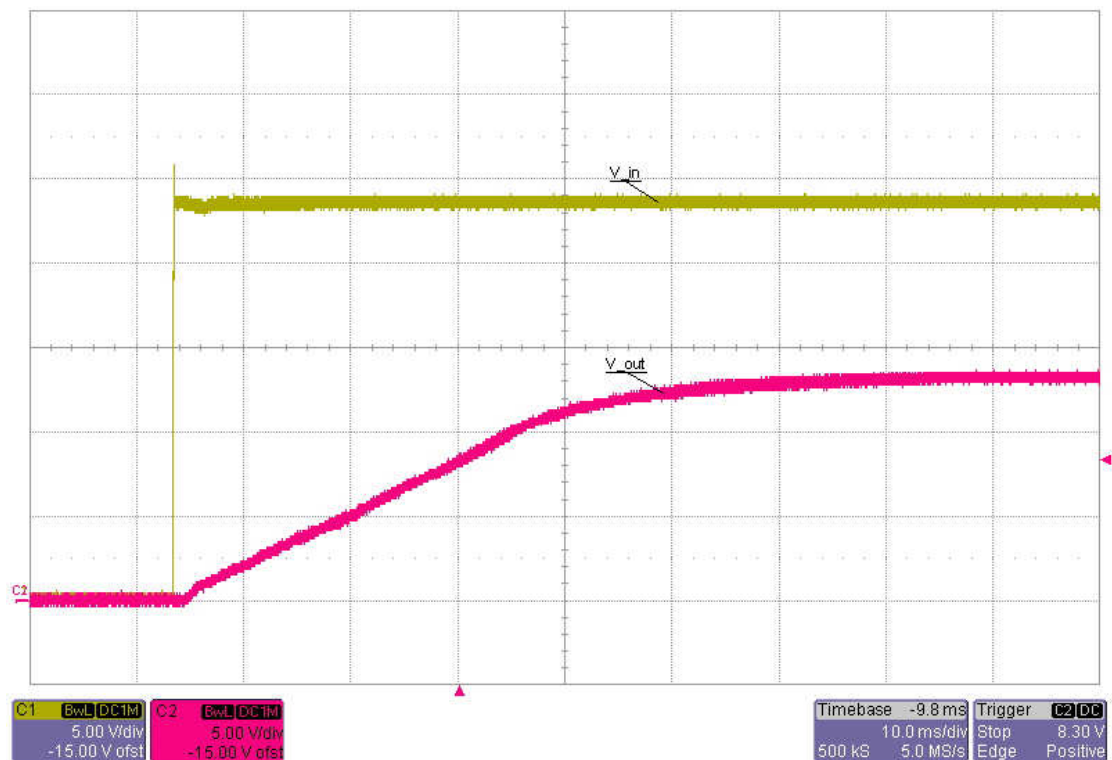


Figure 1

## 2 Shutdown

The shutdown waveform is shown in Figure 2. The input voltage is set at 24.0V with a 2.0A load on the 13.2V output.

Channel C1: **24.0V Input voltage**  
5V/div, 100us/div

Channel C2: **13.2V Output voltage**  
5V/div, 100us/div

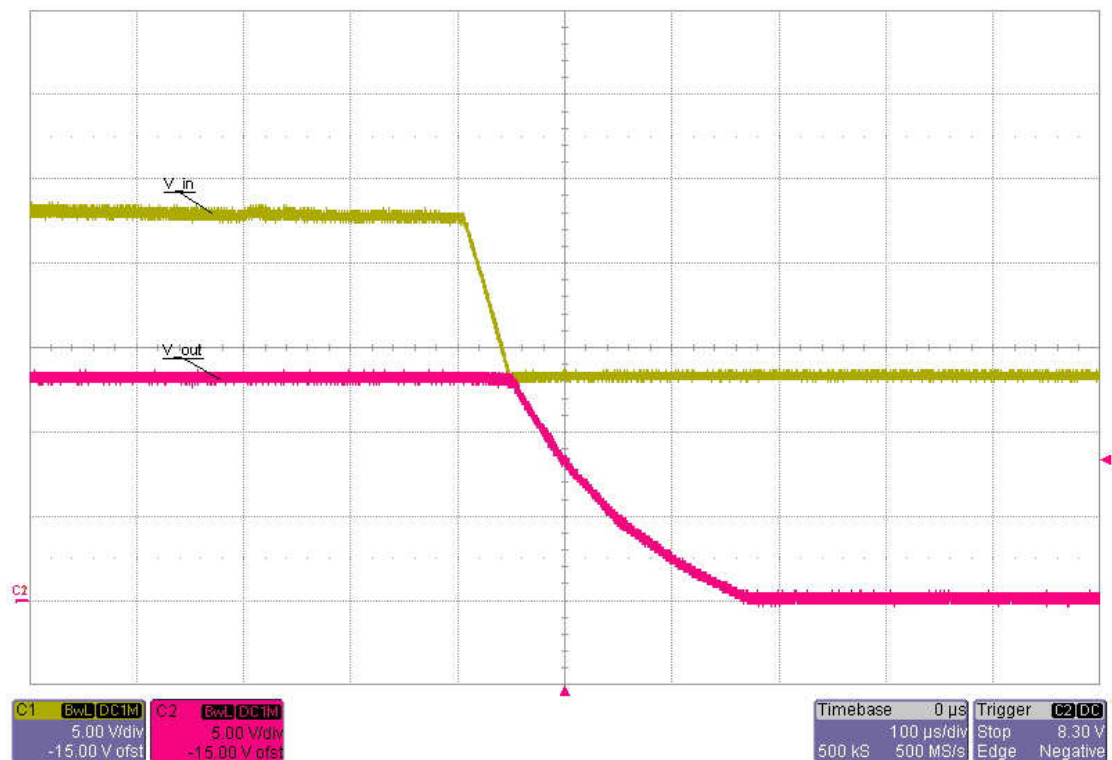


Figure 2

### 3 Efficiency & Load Regulation

The efficiency and load regulation are shown in Figure 3 and Figure 4.

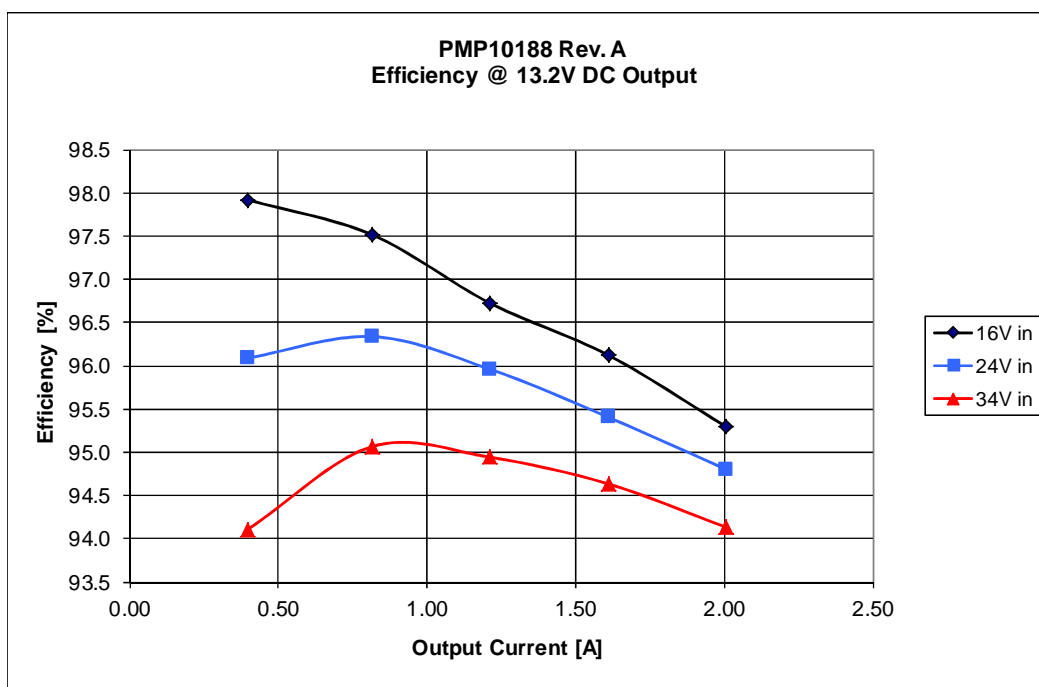


Figure 3

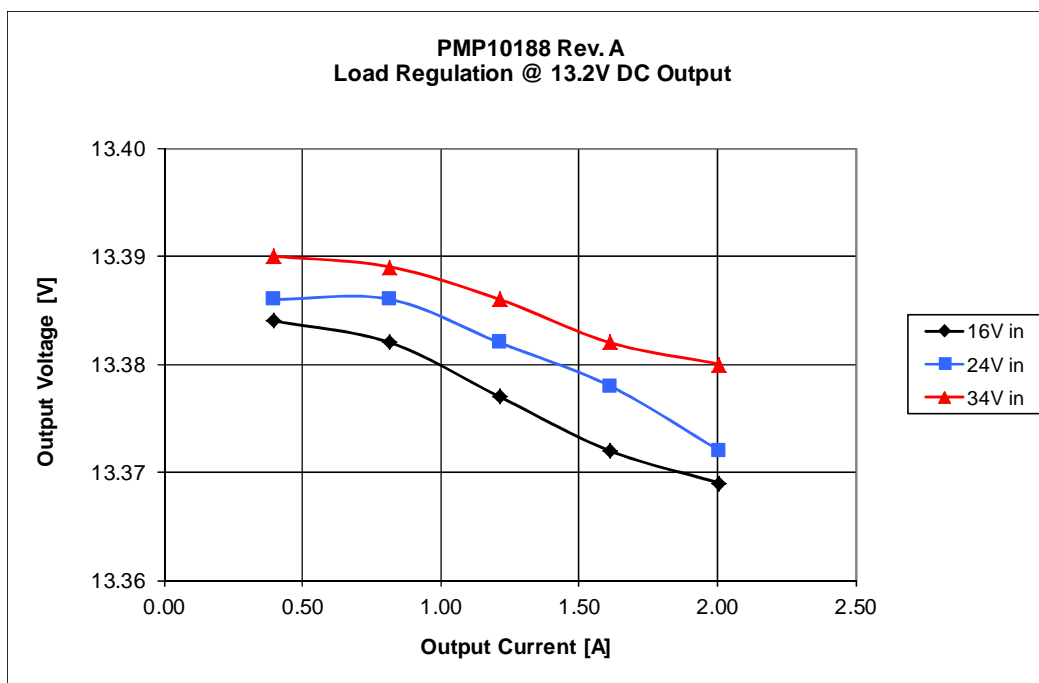


Figure 4

## 4 Load Step

The response to a load step and a load dump for the 13.2V output at an input voltage of 24.0V is shown in Figure 5.

Channel C2: **Output voltage**, -494mV undershoot (3.7%), 482mV overshoot (3.7%)  
500mV/div, 1ms/div, AC coupled

Channel C1: **Load current**, load step 1.0A to 2.0A and vice versa  
1A/div, 1ms/div

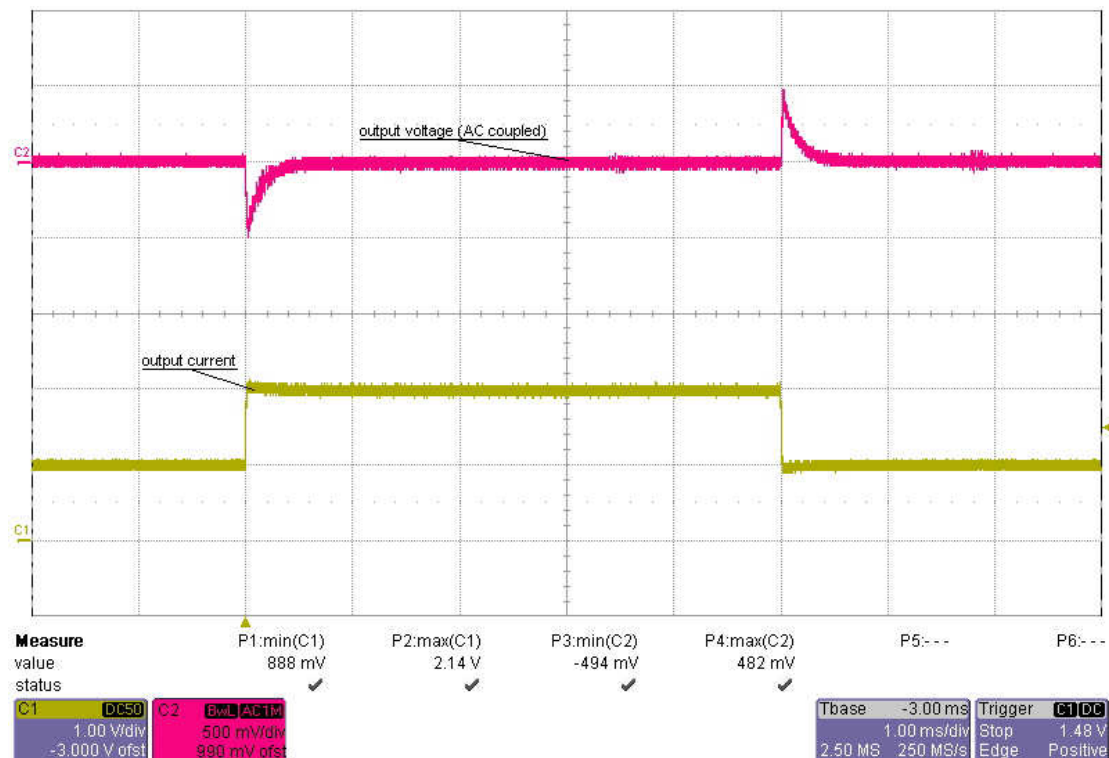


Figure 5

## 5 Frequency Response

Figure 6 shows the loop response at 16V, 24V and 34V input voltage and 2.0A load.

### 16V input

- 2.0A load      73 deg phase margin, 22.3 kHz bandwidth, -15 dB gain margin

### 24V input

- 2.0A load      74 deg phase margin, 22.1 kHz bandwidth, -15 dB gain margin

### 34V input

- 2.0A load      74 deg phase margin, 22.3 kHz bandwidth, -15 dB gain margin

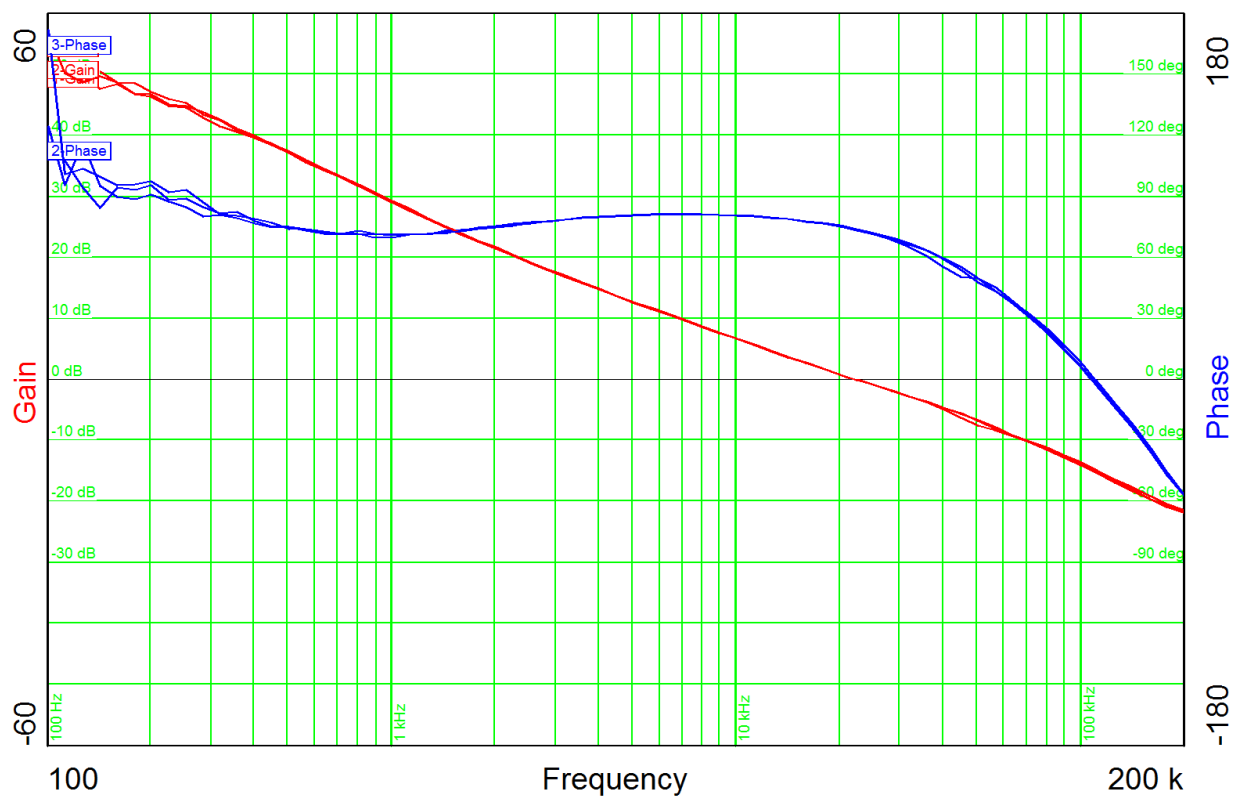
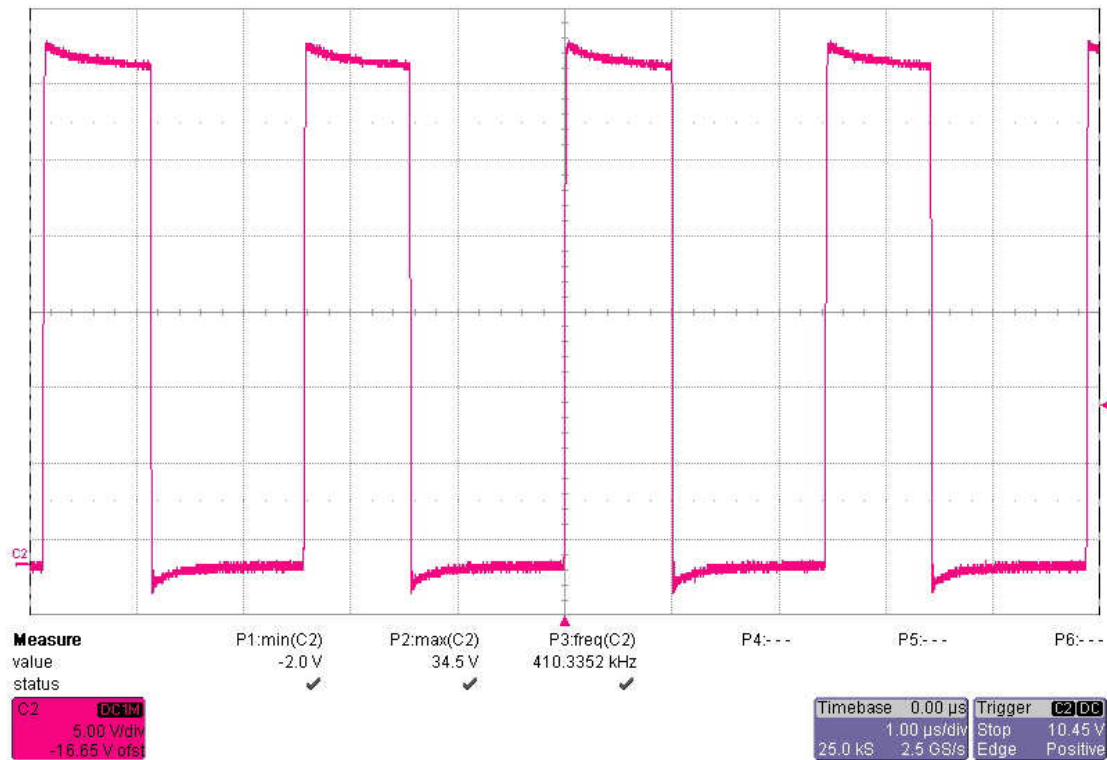


Figure 6

## 6 Switching Node

The drain-source voltage on the switching node is shown in Figure 7. The image was captured with 34V input and 2.0A load.

Channel C2: **Drain-source voltage**, -2.0V minimum voltage, 34.5V maximum voltage  
5V/div, 1us/div



**Figure 7**

## 7 Output Ripple Voltage

The output ripple voltage at 2.0A load and 16V, 24V and 34V input voltage is shown in Figure 8.

Channel M1: **Output voltage @ 16V input**, 16mV peak-peak  
20mV/div, 2 $\mu$ s/div, AC coupled

Channel M2: **Output voltage @ 24V input**, 22mV peak-peak  
20mV/div, 2 $\mu$ s/div, AC coupled

Channel M3: **Output voltage @ 34V input**, 24mV peak-peak  
20mV/div, 2 $\mu$ s/div, AC coupled

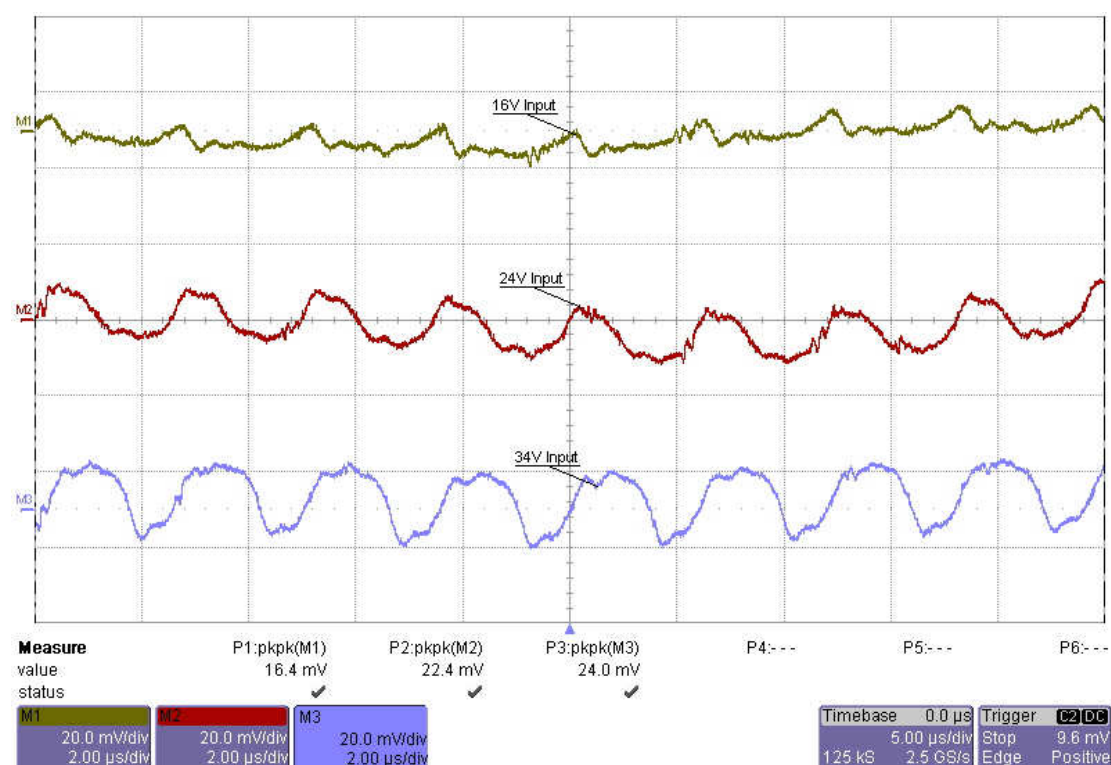


Figure 8



## 8 Input Ripple Voltage

The input ripple voltage at 2.0A load and 16V, 24V and 34V input voltage is shown in Figure 9.

Channel M1: **Input voltage @ 16V input**, 126mV peak-peak  
200mV/div, 2us/div, AC coupled

Channel M2: **Input voltage @ 24V input**, 258mV peak-peak  
200mV/div, 2us/div, AC coupled

Channel M3: **Input voltage @ 34V input**, 312mV peak-peak  
200mV/div, 2us/div, AC coupled

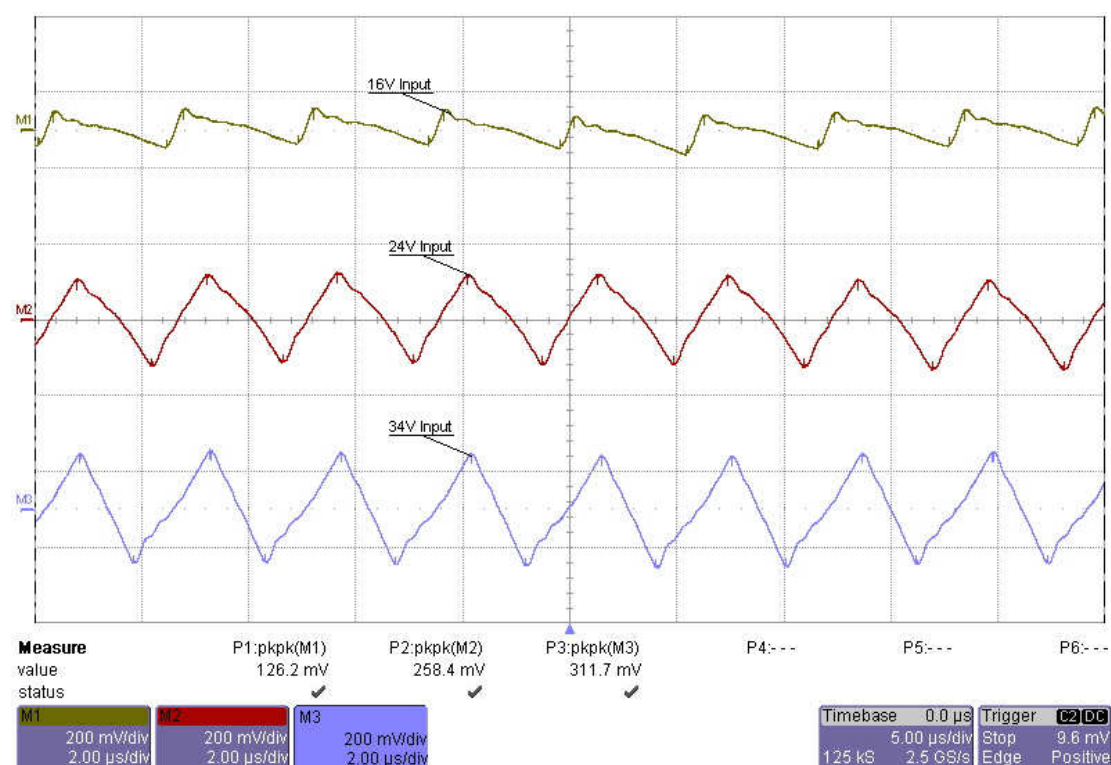


Figure 9

## 9 Thermal measurement

The thermal image (Figure 10) shows the circuit at an ambient temperature of 21 °C with an input voltage of 24.0V and a load of 2.0A.

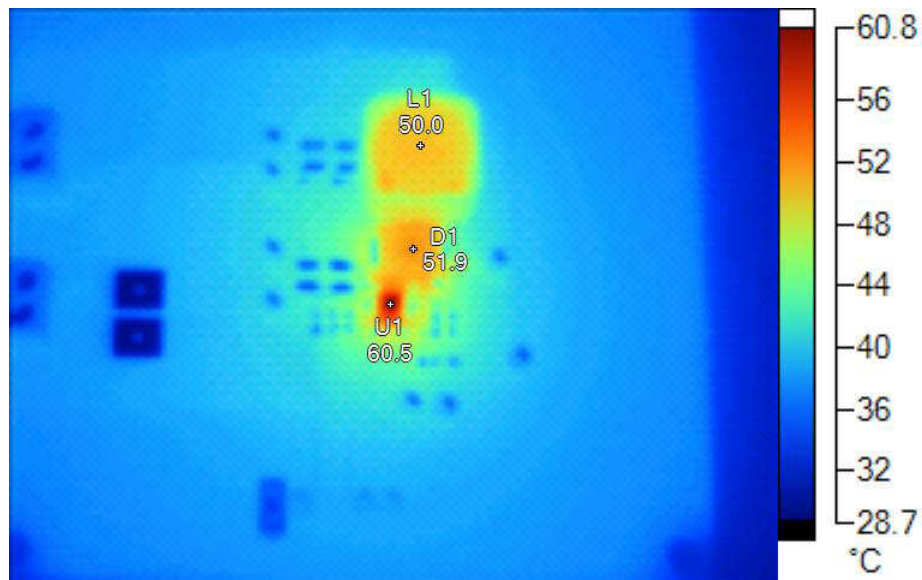


Figure 10

### Markers

Label	Temperature	Emissivity	Background
U1	60.5 °C	0.95	21.0 °C
L1	50.0 °C	0.95	21.0 °C
D1	51.9 °C	0.95	21.0 °C

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2021, Texas Instruments Incorporated