

TVS Surge Rating: Power vs. Current

Cameron Phillips




For a long time, Transient Voltage Suppressor (TVS) diodes have been protecting supply or signal lines from transient surge events which are defined by IEC 61000-4-5 Surge Immunity Test. These TVS diodes have often been rated for their maximum power capability. For example TVS diodes in SMA packages are typically rated for 4kW 8/20µs surge pulse. This can be misleading to some customers to think that more power dissipation means a high surge pulse that can be protected against.

$$P = I * V \tag{1}$$

The most important thing to remember about TVS diodes is that they still follow the same diode IV curve as all diodes do where after the breakdown voltage the diode begins to conduct current proportional to the inherent dynamic resistance. These diodes curves that can be seen in [Figure 1](#). Notice this is showing the corresponding clamping voltage for a particular 8x20µs surge current level. If you are unfamiliar with the basics of TVS diodes you can check out [Demystifying Surge Protection](#).

Figure 1. Different Diode IV curves

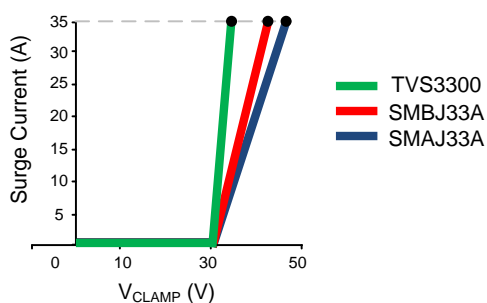


Device	Surge Current	Clamping Voltage	Power
TVS3300	35 A	37 V	1295 W
SMAJ33A	35 A	46 V	1610 W
SMBJ33A	35 A	43 V	1505 W

If you took a certain point on the IV graph for the SMAJ33A, the power calculated at that point would be 46V * 35A = 1610W. This seems like quite a bit but if you look at the TVS3300 at the same surge current of 35A the clamping voltage is ~37V which gives a power of 1295W. Obviously the TVS3300 took 315W less power than the SMAJ33A but it was still able to provide the same amount of protection. The clamping voltage of a TVS diode, as explained in [Demystifying](#)

[Surge Protection](#), is dependant on the breakdown voltage and the dynamic resistance of the device. Therefore, if the voltage is only dependant on the TVS device itself, the other parameter that can show the level of protection is surge current.

Figure 2. TVS Diode Characteristics

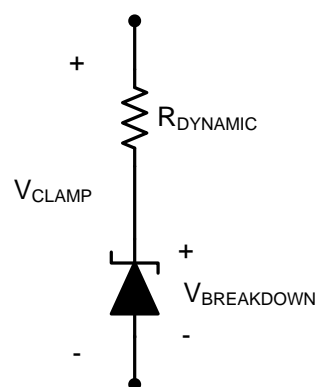

Surge current is generated by the combinational waveform generator outlined in [IEC61000-4-X](#). This current has to be dissipated by the system and more specifically the TVS diode. Since the Flat-Clamp devices have a much lower dynamic resistance the current will be conducted through the device easily while not causing a large clamping voltage for the rest of the system.

In conclusion, when calculating the surge protection level of a device, remember that the TVS diode itself is what effects the clamping voltage and the surge current is the best representation of how severe a surge pulse is. Since the Flat-Clamp devices have best in class dynamic resistance, they naturally have best in class clamping voltage. This is one of the many differentiating aspects of TI's Flat-Clamp devices. For more information about the family of devices and the patented technology please see [Flat-Clamp Surge Protection Technology For Efficient System Protection](#).

Table 1. Flat-Clamp Device Recommendations

DEVICE	V _{rwm}	V _{clamp at I_{pp}}	I _{pp} (8/20 µs)
TVS0500	5	9.2 V	43 A
TVS0701	7	11 V	30 A
TVS1400	14	18.6 V	43 A
TVS1401	14	20.5 V	30 A
TVS2700	27	32.5 V	40 A

Table 1. Flat-Clamp Device Recommendations (continued)

DEVICE	V_{rwm}	V_{clamp} at I_{pp}	I_{pp} (8/20 μ s)
TVS2701	27	34 V	27 A

DEVICE	V_{rwm}	V_{clamp} at I_{pp}	I_{pp} (8/20 μ s)
TVS3300	33	38 V	35 A
TVS3301	33	40 V	27 A

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2018, Texas Instruments Incorporated