

TPS22976 5.7V、6A、14mΩ オン抵抗、デュアル・チャネル負荷スイッチ

1 特長

- 統合型デュアル・チャネル負荷スイッチ
- 入力電圧範囲: 0.6V ~ V_{BIAS}
- V_{BIAS} 電圧範囲: 2.5V ~ 5.7V
- オン抵抗
 - $R_{ON} = 14m\Omega$ (標準値)
($V_{IN} = 0.6V \sim 5V$, $V_{BIAS} = 5V$)
 - $R_{ON} = 18m\Omega$ (標準値)
($V_{IN} = 0.6V \sim 2.5V$, $V_{BIAS} = 2.5V$)
- チャネルごとに 6A の最大連続スイッチング電流
- TPS22976、TPS22976N の静止電流
 - 37 μA (標準値、両チャネル)
($V_{IN} = V_{BIAS} = 5V$)
 - 35 μA (標準値、単一チャネル)
($V_{IN} = V_{BIAS} = 5V$)
- TPS22976A の静止電流
 - 85 μA (標準値、両チャネル)
($V_{IN} = V_{BIAS} = 5V$)
 - 83 μA (標準値、単一チャネル)
($V_{IN} = V_{BIAS} = 5V$)
- 制御入力しきい値により、1.2、1.8、2.5、3.3V ロジックを使用可能
- 立ち上がり時間を設定可能
- 高速ターンオン時間 (TPS22976A)
 - $t_{ON} = 17\mu s$ ($V_{IN} = 1.05V$ 時)
- サーマル・シャットダウン
- クイック出力放電 (QOD) (オプション)
- サーマル・パッド付き SON 14 ピン・パッケージ
- ESD 性能をテスト済み (JESD 22)
 - HBM 2kV、CDM 1kV

2 アプリケーション

- PC とノート PC
- セットトップ ボックス、住居用ゲートウェイ
- テレコム システム
- SSD (ソリッドステートドライブ)

3 概要


TPS22976 製品ファミリは 3 つのデバイス (TPS22976、TPS22976A、TPS22976N) から成ります。各デバイスは、ターンオン制御付きのデュアル・チャネル負荷スイッチです。入力電圧範囲 0.6V ~ 5.7V で動作する 2 つの N チャネル MOSFET を備えており、各チャネル最大 6A の連続電流をサポートできます。各スイッチは、低電圧制御信号と直接インターフェイス可能なオン入力とオフ入力 (ON1 および ON2) により独立して制御されます。TPS22976 は接合部温度がしきい値を超えたときにサーマル・シャットダウンでスイッチを切断できます。接合部温度が安全範囲で安定化すると、スイッチが再びオンになります。TPS22976 はオプションで、スイッチがオフのときにクイック出力放電を行えるよう、230 Ω のオンチップ負荷抵抗を内蔵できます。

TPS22976 は、高電力に対応可能なサーマル・パッド付きの小型で省スペースな 3mm × 2mm 14-SON パッケージ (DPU) で供給され、周囲温度 -40°C ~ 105°C での動作が規定されています。

製品情報⁽¹⁾

部品番号	パッケージ	本体サイズ (公称)
TPS22976 TPS22976A TPS22976N	WSON (14)	3.00mm × 2.00mm

(1) 利用可能なすべてのパッケージについては、このデータシートの末尾にある注文情報を参照してください。

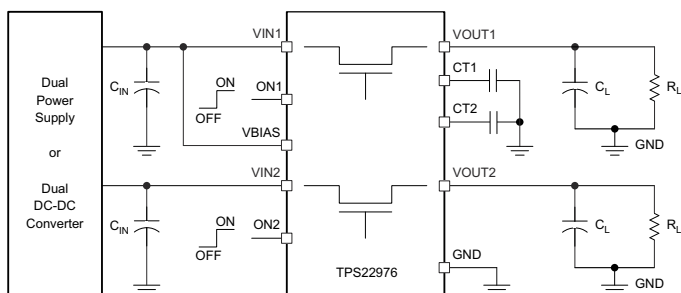

Copyright © 2016, Texas Instruments Incorporated

アプリケーション回路例




Table of Contents

1 特長	1	8.1 Overview.....	22
2 アプリケーション	1	8.2 Functional Block Diagram.....	23
3 概要	1	8.3 Feature Description.....	23
4 Device Comparison Table	3	8.4 Device Functional Modes.....	24
5 Pin Configuration and Functions	3	9 Application and Implementation	25
Pin Functions.....	3	9.1 Application Information.....	25
6 Specifications	5	9.2 Typical Application.....	27
6.1 Absolute Maximum Ratings.....	5	9.3 Power Supply Recommendations.....	30
6.2 ESD Ratings.....	5	9.4 Layout.....	30
6.3 Recommended Operating Conditions.....	5	10 Device and Documentation Support	31
6.4 Thermal Information.....	5	10.1 Device Support.....	31
6.5 Electrical Characteristics (VBIAS = 5V).....	6	10.2 Documentation Support.....	31
6.6 Electrical Characteristics (VBIAS = 2.5V).....	8	10.3 ドキュメントの更新通知を受け取る方法.....	31
6.7 Switching Characteristics (TPS22976).....	9	10.4 サポート・リソース.....	31
6.8 Switching Characteristics (TPS22976A).....	11	10.5 Trademarks.....	31
6.9 Switching Characteristics (TPS22976N).....	11	10.6 静電気放電に関する注意事項.....	31
6.10 Typical DC Characteristics.....	13	10.7 用語集.....	31
6.11 Typical AC Characteristics.....	16	11 Revision History	31
7 Parameter Measurement Information	21	12 Mechanical, Packaging, and Orderable Information	32
8 Detailed Description	22		


4 Device Comparison Table

DEVICE	R_{ON} AT $V_{IN} = V_{BIAS} = 5\text{ V}$ (TYPICAL)	QUICK OUTPUT DISCHARGE	MAXIMUM OUTPUT CURRENT	TURN ON TIME <65 μ s AT $V_{IN} = 1.05\text{ V}$
TPS22976	16 m Ω	Yes	6 A	No
TPS22976A	14 m Ω	Yes	6 A	Yes
TPS22976N	14 m Ω	No	6 A	No

5 Pin Configuration and Functions

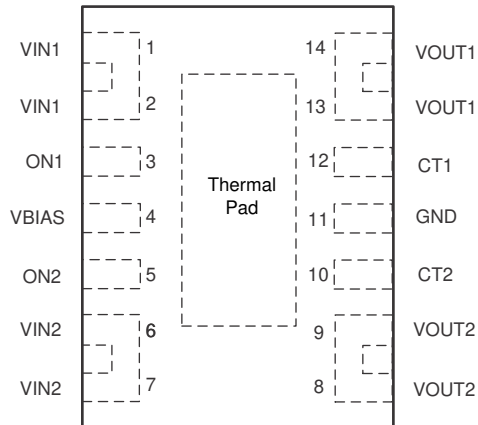

✎ 5-1. DPU Package 14-Pin WSON with Exposed Thermal Pad Top View

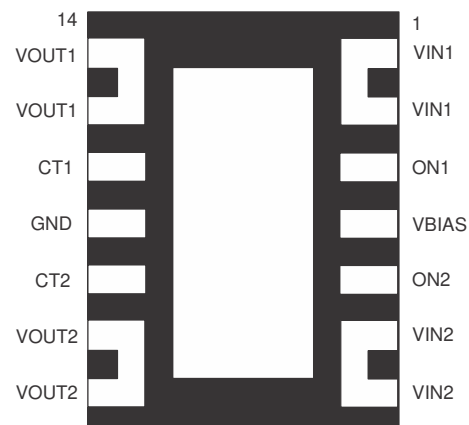

✎ 5-2. DPU Package 14-Pin WSON with Exposed Thermal Pad Bottom View

Pin Functions

PIN		I/O	DESCRIPTION
NO.	NAME		
1	VIN1	I	Switch 1 input. Recommended voltage range for these pins for optimal R_{ON} performance is 0.6 V to V_{BIAS} . Place an optional decoupling capacitor between these pins and GND to reduce V_{IN1} dip during turnon of the channel. See the Application Information section for more information.
2			
3	ON1	I	Active-high switch 1 control input. Do not leave floating.
4	VBIAS	I	Bias voltage. Power supply to the device. Recommended voltage range for this pin is 2.5 V to 5.7 V. See the Application Information section.
5	ON2	I	Active-high switch 2 control input. Do not leave floating.
6	VIN2	I	Switch 2 input. Recommended voltage range for these pins for optimal R_{ON} performance is 0.6 V to V_{BIAS} . Place an optional decoupling capacitor between these pins and GND to reduce V_{IN2} dip during turn-on of the channel. See the Application Information section for more information.
7			
8	VOUT2	O	Switch 2 output.
9			
10	CT2	O	Switch 2 slew rate control. Can be left floating. Capacitor used on this pin must be rated for a minimum of 25 V for desired rise time performance.
11	GND	—	Ground.
12	CT1	O	Switch 1 slew rate control. Can be left floating. Capacitor used on this pin must be rated for a minimum of 25 V for desired rise time performance.
13	VOUT1	O	Switch 1 output.
14			

PIN		I/O	DESCRIPTION
NO.	NAME		
—	Thermal pad	—	Thermal pad (exposed center pad) to alleviate thermal stress. Tie to GND. See the Layout section for layout guidelines.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
V _{IN1,2}	Input Voltage	−0.3	6	V
V _{OUT1,2}	Output Voltage	−0.3	6	V
V _{ON1,2}	ON Pin Voltage	−0.3	6	V
V _{BIAS}	Bias Voltage	−0.3	6	V
I _{MAX}	Maximum continuous current per channel		6	A
I _{MAX,PLS}	Maximum pulsed current switch per channel, pulse <300μs, 3% duty cycle		8	A
T _J	Junction temperature		125	°C
T _{stg}	Storage temperature	−65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	±2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	±1000	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V _{IN1,2}	Input Voltage	0.6		V _{BIAS}	V
V _{BIAS}	Bias Voltage	2.5		5.7	V
V _{ON1,2}	ON Pin Voltage	0		5.7	V
V _{OUT1,2}	Output Voltage	0		V _{IN}	V
V _{IH}	High-Level Input Voltage, ON	1.2		5.7	V
V _{IL}	Low-Level Input Voltage, ON	0		0.5	V
T _A	Ambient Temperature	−40		105	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS22976	UNIT
		DPU (WSON)	
		14 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	50.8	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	52.3	°C/W
R _{θJB}	Junction-to-board thermal resistance	18.4	°C/W
Ψ _{JT}	Junction-to-top characterization parameter	1.6	°C/W

6.4 Thermal Information (続き)

THERMAL METRIC ⁽¹⁾		TPS22976	UNIT
		DPU (WSON)	
		14 PINS	
Ψ_{JB}	Junction-to-board characterization parameter	18.6	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	6.5	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics (VBIAS = 5V)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
Power Supplies and Currents							
$I_{Q,VBIAS}$	V_{BIAS} Quiescent Current (TPS22976, both channels)	$I_{OUT1} = I_{OUT2} = 0\text{mA}$, $V_{IN1,2} = V_{ON1,2} = 5\text{V}$	-40°C to 85°C	37	49		μA
			-40°C to 105°C		49		μA
	V_{BIAS} Quiescent Current (TPS22976, single-channel)	$I_{OUT1} = I_{OUT2} = 0\text{mA}$, $V_{ON2} = 0\text{V}$, $V_{IN1,2} = V_{IN1} = 5\text{V}$	-40°C to 85°C	35	43		μA
			-40°C to 105°C		44		μA
$I_{Q,VBIAS}$	V_{BIAS} Quiescent Current (TPS22976A, both channels)	$I_{OUT1} = I_{OUT2} = 0\text{mA}$, $V_{IN1,2} = V_{ON1,2} = 5\text{V}$	-40°C to 85°C	85	106		μA
			-40°C to 105°C		106		μA
	V_{BIAS} Quiescent Current (TPS22976A, single-channel)	$I_{OUT1} = I_{OUT2} = 0\text{mA}$, $V_{ON2} = 0\text{V}$, $V_{IN1,2} = V_{IN1} = 5\text{V}$	-40°C to 85°C	83	102		μA
			-40°C to 105°C		102		μA
$I_{Q,VBIAS}$	V_{BIAS} Quiescent Current (TPS22976N, both channels)	$I_{OUT1} = I_{OUT2} = 0\text{mA}$, $V_{IN1,2} = V_{ON1,2} = 5\text{V}$	-40°C to 85°C	37	48		μA
			-40°C to 105°C		49		μA
	V_{BIAS} Quiescent Current (TPS22976N, single-channel)	$I_{OUT1} = I_{OUT2} = 0\text{mA}$, $V_{ON2} = 0\text{V}$, $V_{IN1,2} = V_{IN1} = 5\text{V}$	-40°C to 85°C	35	43		μA
			-40°C to 105°C		44		μA
$I_{SD,VBIAS}$	V_{BIAS} Shutdown Current	$V_{ON1,2} = 0\text{V}$, $V_{OUT1,2} = 0\text{V}$	-40°C to 105°C	1.37	2.3		μA
$I_{SD,VIN}$	V_{IN} Shutdown Current (per channel)	$V_{ON} = 0\text{V}$, $V_{OUT} = 0\text{V}$	$V_{IN} = 5\text{V}$	-40°C to 85°C	0.005	5.5	μA
				-40°C to 105°C		11.3	μA
			$V_{IN} = 3.3\text{V}$	-40°C to 85°C	0.002	1.4	μA
				-40°C to 105°C		3.4	μA
			$V_{IN} = 1.8\text{V}$	-40°C to 85°C	0.002	0.5	μA
				-40°C to 105°C		1.4	μA
			$V_{IN} = 0.6\text{V}$	-40°C to 85°C	0.001	0.3	μA
				-40°C to 105°C		0.8	μA
I_{ON}	ON Pin Leakage Current	$V_{ON} = 5.5\text{V}$	-40°C to 105°C		0.1		μA

6.5 Electrical Characteristics (VBIAS = 5V) (続き)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A	MIN	TYP	MAX	UNIT
R _{ON}	On-Resistance (TPS22976)	I _{OUT} = -200mA	V _{IN} = 5V	25°C		16	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 3.3V	25°C		16	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 1.8V	25°C		16	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 1.2V	25°C		16	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 1.05V	25°C		16	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 0.6V	25°C		14	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
Resistance Characteristics								
R _{ON}	On-Resistance (TPS22976A, TPS22976N)	I _{OUT} = -200mA	V _{IN} = 5V	25°C		14	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 3.3V	25°C		14	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 1.8V	25°C		14	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 1.2V	25°C		14	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 1.05V	25°C		14	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
			V _{IN} = 0.6V	25°C		14	18	mΩ
				-40°C to 85°C			22	mΩ
				-40°C to 105°C			23	mΩ
V _{ON,HYS}	ON Pin Hysteresis	V _{IN} = 5V	25°C		90		mV	
R _{PD}	Output Pulldown Resistance	V _{IN} = V _{OUT} = 5V, V _{ON} = 0V	-40°C to 105°C		230	280	Ω	
T _{SD}	Thermal Shutdown	Junction Temperature Rising	-		160		°C	
T _{SD,HYS}	Thermal Shutdown Hysteresis	Junction Temperature Falling	-		20		°C	

6.6 Electrical Characteristics (VBIAS = 2.5V)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A	MIN	TYP	MAX	UNIT
Power Supplies and Currents								
I _{Q,VBIAS}	V _{BIAS} Quiescent Current (TPS22976, TPS22976N, both channels)	I _{OUT1} = I _{OUT2} = 0mA, V _{IN1,2} = V _{ON1,2} = 2.5V		-40°C to 85°C	15	20	μA	
				-40°C to 105°C		20	μA	
	V _{BIAS} Quiescent Current (TPS22976, TPS22976N, single-channel)	I _{OUT1} = I _{OUT2} = 0mA, V _{ON2} = 0V, V _{IN1,2} = V _{IN1} = 2.5V		-40°C to 85°C	14	19	μA	
				-40°C to 105°C		19	μA	
I _{Q,VBIAS}	V _{BIAS} Quiescent Current (TPS22976A, both channels)	I _{OUT1} = I _{OUT2} = 0mA, V _{IN1,2} = V _{ON1,2} = 2.5V		-40°C to 85°C	26	37	μA	
				-40°C to 105°C		37	μA	
	V _{BIAS} Quiescent Current (TPS22976A, single-channel)	I _{OUT1} = I _{OUT2} = 0mA, V _{ON2} = 0V, V _{IN1,2} = V _{IN1} = 2.5V		-40°C to 85°C	25	36	μA	
				-40°C to 105°C		36	μA	
I _{SD,VBIAS}	V _{BIAS} Shutdown Current	V _{ON1,2} = 0V, V _{OUT1,2} = 0V		-40°C to 105°C	0.58	1.1	μA	
I _{SD,VIN}	V _{IN} Shutdown Current (per channel)	V _{ON} = 0V, V _{OUT} = 0V	V _{IN} = 2.5V	-40°C to 85°C	0.005	0.8	μA	
				-40°C to 105°C		2.1	μA	
			V _{IN} = 1.8V	-40°C to 85°C	0.002	0.5	μA	
				-40°C to 105°C		1.4	μA	
			V _{IN} = 1.05V	-40°C to 85°C	0.002	0.3	μA	
				-40°C to 105°C		1	μA	
			V _{IN} = 0.6V	-40°C to 85°C	0.001	0.3	μA	
				-40°C to 105°C		0.8	μA	
I _{ON}	ON Pin Leakage Current		V _{ON} = 5.5V	-40°C to 105°C		0.1	μA	
R _{ON}	On-Resistance (TPS22976)	I _{OUT} = -200mA	V _{IN} = 2.5V	25°C	18	23	mΩ	
				-40°C to 85°C		28	mΩ	
				-40°C to 105°C		30	mΩ	
			V _{IN} = 1.8V	25°C	16	23	mΩ	
				-40°C to 85°C		28	mΩ	
				-40°C to 105°C		29	mΩ	
			V _{IN} = 1.5V	25°C	16	22	mΩ	
				-40°C to 85°C		27	mΩ	
				-40°C to 105°C		28	mΩ	
			V _{IN} = 1.2V	25°C	16	21	mΩ	
				-40°C to 85°C		26	mΩ	
				-40°C to 105°C		28	mΩ	
			V _{IN} = 1.05V	25°C	16	21	mΩ	
				-40°C to 85°C		25	mΩ	
				-40°C to 105°C		27	mΩ	
			V _{IN} = 0.6V	25°C	16	20	mΩ	
				-40°C to 85°C		25	mΩ	
				-40°C to 105°C		26	mΩ	
Resistance Characteristics								

6.6 Electrical Characteristics (VBIAS = 2.5V) (続き)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A	MIN	TYP	MAX	UNIT
R _{ON}	On-Resistance (TPS22976A, TPS22976N)	I _{OUT} = -200mA	V _{IN} = 2.5V	25°C	18	23	mΩ
				-40°C to 85°C		28	mΩ
				-40°C to 105°C		30	mΩ
			V _{IN} = 1.8V	25°C	16	23	mΩ
				-40°C to 85°C		28	mΩ
				-40°C to 105°C		29	mΩ
			V _{IN} = 1.5V	25°C	16	22	mΩ
				-40°C to 85°C		27	mΩ
				-40°C to 105°C		28	mΩ
			V _{IN} = 1.2V	25°C	16	21	mΩ
				-40°C to 85°C		26	mΩ
				-40°C to 105°C		28	mΩ
			V _{IN} = 1.05V	25°C	16	21	mΩ
				-40°C to 85°C		25	mΩ
				-40°C to 105°C		27	mΩ
			V _{IN} = 0.6V	25°C	15	20	mΩ
				-40°C to 85°C		25	mΩ
				-40°C to 105°C		26	mΩ
V _{ON,HYS}	ON Pin Hysteresis	V _{IN} = 2.5V	25°C		70		mV
R _{PD}	Output Pulldown Resistance	V _{IN} = V _{OUT} = 2.5V, V _{ON} = 0V	-40°C to 105°C		250	330	Ω
T _{SD}	Thermal Shutdown	Junction Temperature Rising	-		160		°C
T _{SD,HYS}	Thermal Shutdown Hysteresis	Junction Temperature Falling	-		20		°C

6.7 Switching Characteristics (TPS22976)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
VIN = VON = VBIAS = 5V, TA = 25°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2390		μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		3		μs
t _R	Rise Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		1770		μs
t _F	Fall Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _D	Delay Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		620		μs
VIN = 0.6V, VON = VBIAS = 5V, TA = 25°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		745		μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		3		μs
t _R	Rise Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		285		μs
t _F	Fall Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _D	Delay Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		460		μs
VIN = 2.5V, VON = 5V, VBIAS = 2.5V, TA = 25°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		3485		μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _R	Rise Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2275		μs

6.7 Switching Characteristics (TPS22976) (続き)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_F	Fall Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		2		μs
t_D	Delay Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		1210		μs
VIN = 0.6V, VON = 5V, VBIAS = 2.5V, TA = 25°C						
t_{ON}	Turn ON Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		1730		μs
t_{OFF}	Turn OFF Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		2		μs
t_R	Rise Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		700		μs
t_F	Fall Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		2		μs
t_D	Delay Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		1030		μs
VIN = 1.05V, VON = VBIAS = 5V, TA = -40°C to 85°C						

6.8 Switching Characteristics (TPS22976A)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
VIN = VON = VBIAS = 5V, TA = 25°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		350		μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _R	Rise Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		263		μs
t _F	Fall Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _D	Delay Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		86		μs
VIN = 0.6V, VON = VBIAS = 5V, TA = 25°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		100		μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _R	Rise Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		41		μs
t _F	Fall Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _D	Delay Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		58		μs
VIN = 2.5V, VON = 5V, VBIAS = 2.5V, TA = 25°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		612		μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		3		μs
t _R	Rise Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		392		μs
t _F	Fall Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _D	Delay Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		221		μs
VIN = 0.6V, VON = 5V, VBIAS = 2.5V, TA = 25°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		301		μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		3		μs
t _R	Rise Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		119		μs
t _F	Fall Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _D	Delay Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		182		μs
VIN = 1.05V, VON = VBIAS = 5V, TA = -40°C to 85°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 0pF		17	42	μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 0pF		2		μs
t _R	Rise Time	R _L = 10Ω, C _L = 0.1μF, CT = 0pF		6	25	μs
t _F	Fall Time	R _L = 10Ω, C _L = 0.1μF, CT = 0pF		2		μs
t _D	Delay Time	R _L = 10Ω, C _L = 0.1μF, CT = 0pF		11	25	μs

6.9 Switching Characteristics (TPS22976N)

over operating free-air temperature range (unless otherwise noted)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
VIN = VON = VBIAS = 5V, TA = 25°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2390		μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		3		μs
t _R	Rise Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		1770		μs
t _F	Fall Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		2		μs
t _D	Delay Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		620		μs
VIN = 0.6V, VON = VBIAS = 5V, TA = 25°C						
t _{ON}	Turn ON Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		745		μs
t _{OFF}	Turn OFF Time	R _L = 10Ω, C _L = 0.1μF, CT = 1000pF		3		μs

6.9 Switching Characteristics (TPS22976N) (続き)

over operating free-air temperature range (unless otherwise noted)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_R	Rise Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		285		μs
t_F	Fall Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		2		μs
t_D	Delay Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		460		μs
VIN = 2.5V, VON = 5V, VBIAS = 2.5V, TA = 25°C						
t_{ON}	Turn ON Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		3485		μs
t_{OFF}	Turn OFF Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		4		μs
t_R	Rise Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		2275		μs
t_F	Fall Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		2		μs
t_D	Delay Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		1210		μs
VIN = 0.6V, VON = 5V, VBIAS = 2.5V, TA = 25°C						
t_{ON}	Turn ON Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		1730		μs
t_{OFF}	Turn OFF Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		5		μs
t_R	Rise Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		700		μs
t_F	Fall Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		2		μs
t_D	Delay Time	$R_L = 10\Omega$, $C_L = 0.1\mu F$, $CT = 1000pF$		1030		μs
VIN = 1.05V, VON = VBIAS = 5V, TA = -40°C to 85°C						

6.10 Typical DC Characteristics

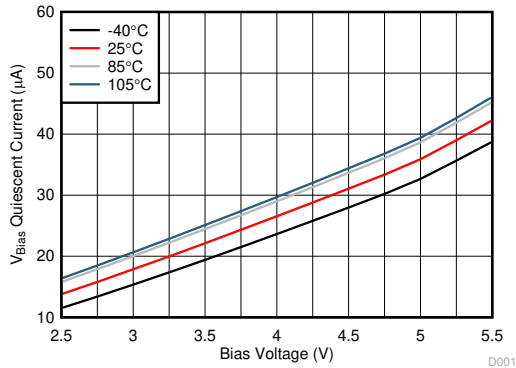


$$V_{IN1} = V_{IN2} = V_{BIAS} \quad V_{ON1} = V_{ON2} = 5 \text{ V} \quad V_{OUT} = \text{Open}$$

Figure 6-1. V_{BIAS} Quiescent Current vs Bias Voltage Both Channels (TPS22976, TPS22976N)

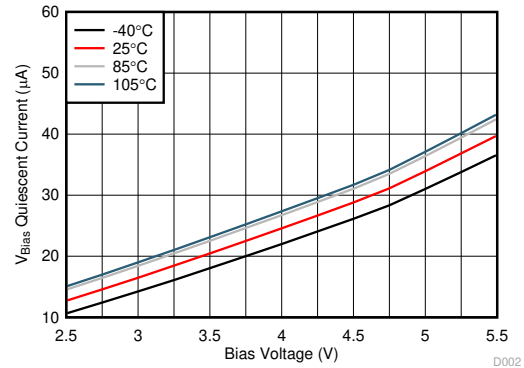


$$V_{IN1} = V_{BIAS} \quad V_{ON1} = 5 \text{ V} \quad V_{OUT} = \text{Open}$$

Figure 6-2. V_{BIAS} Quiescent Current vs Bias Voltage Single Channel (TPS22976, TPS22976N)

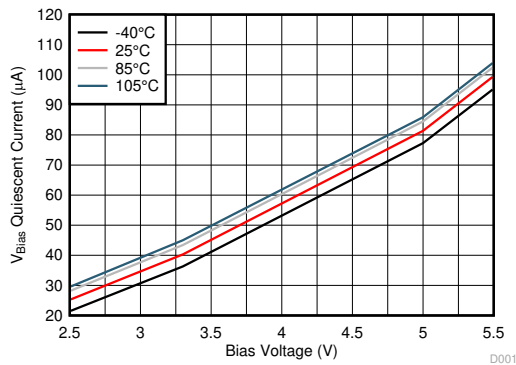


$$V_{IN1} = V_{IN2} = V_{BIAS} \quad V_{ON1} = V_{ON2} = 5 \text{ V} \quad V_{OUT} = \text{Open}$$

Figure 6-3. V_{BIAS} Quiescent Current vs Bias Voltage Both Channels (TPS22976A)

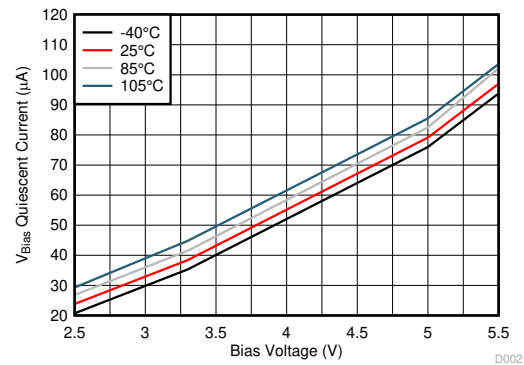


$$V_{IN1} = V_{BIAS} \quad V_{ON1} = 5 \text{ V} \quad V_{OUT} = \text{Open}$$

Figure 6-4. V_{BIAS} Quiescent Current vs Bias Voltage Single Channel (TPS22976A)

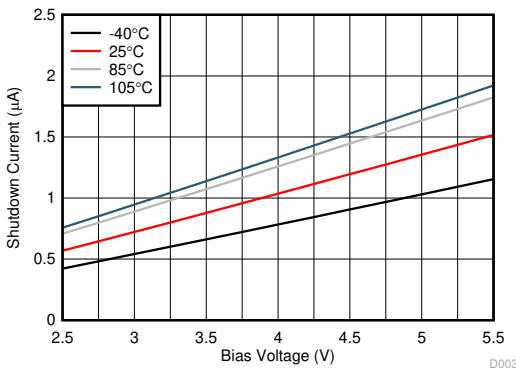

$$V_{IN1} = V_{IN2} = V_{BIAS} \quad V_{ON1} = V_{ON2} = 0 \text{ V} \quad V_{OUT} = 0 \text{ V}$$

Figure 6-5. V_{BIAS} Shutdown Current vs Bias Voltage Both Channels

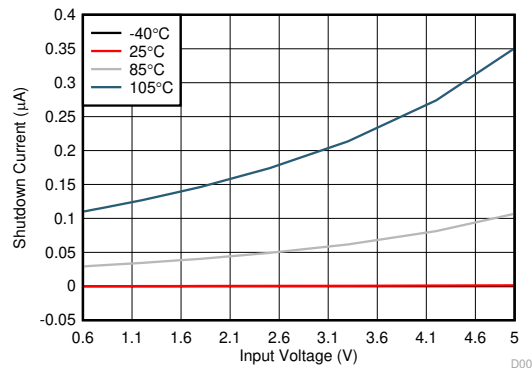

$$V_{BIAS} = 5 \text{ V} \quad V_{ON} = 0 \text{ V} \quad V_{OUT} = 0 \text{ V}$$

Note: -40°C and 25°C curves have similar values, therefore only one line is visible.

Figure 6-6. Off-State V_{IN} Current vs Input Voltage Single Channel

6.10 Typical DC Characteristics (continued)

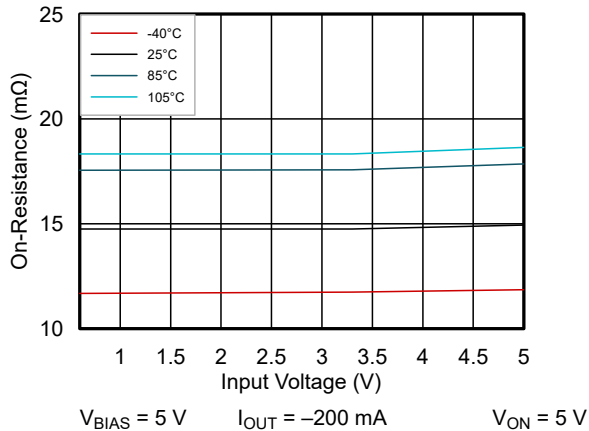


図 6-7. On-Resistance vs Input Voltage Single Channel - Across Ambient Temperatures (TPS22976)

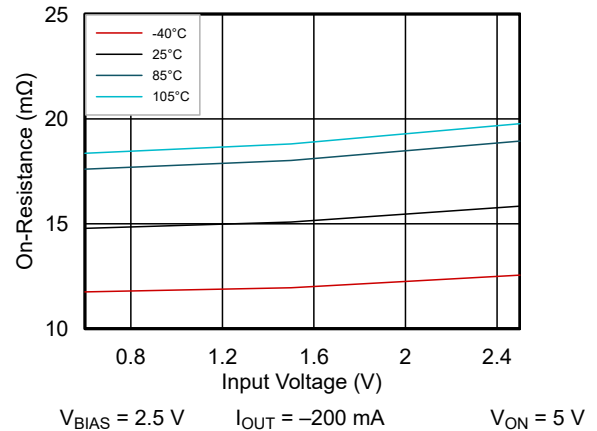


図 6-8. On-Resistance vs Input Voltage Single Channel - Across Ambient Temperatures (TPS22976)

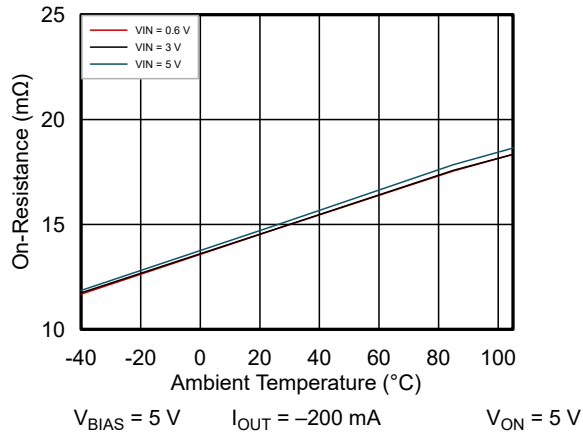


図 6-9. On-Resistance vs Ambient Temperature Single Channel (TPS22976)

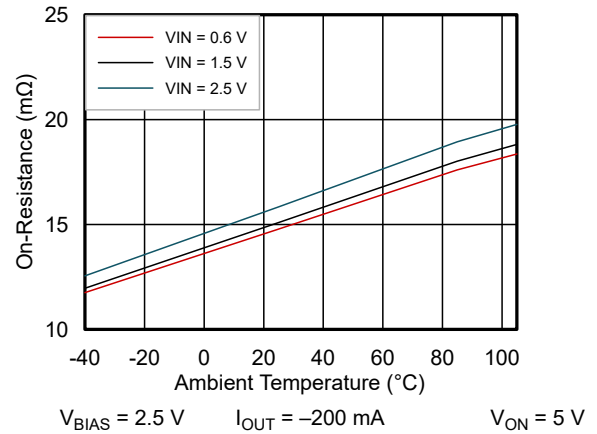


図 6-10. On-Resistance vs Ambient Temperature Single Channel (TPS22976)

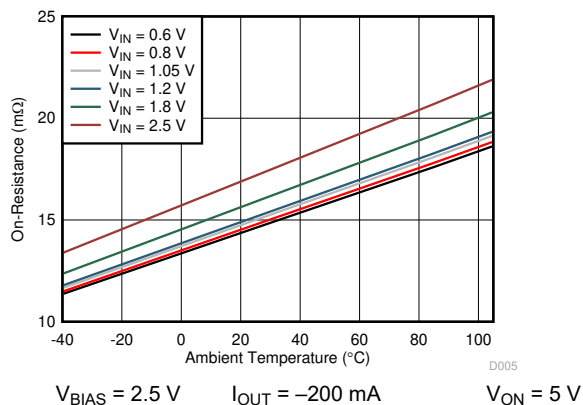


図 6-11. On-Resistance vs Ambient Temperature Single Channel (TPS22976A, TPS22976N)

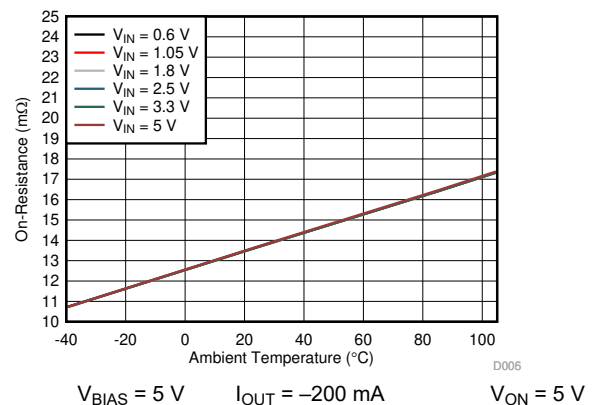


図 6-12. On-Resistance vs Ambient Temperature Single Channel (TPS22976A, TPS22976N)

6.10 Typical DC Characteristics (continued)

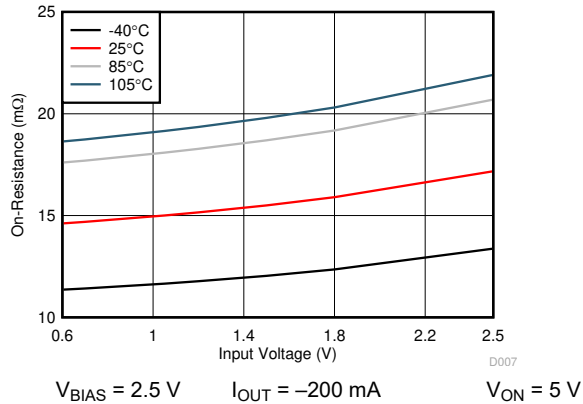


Figure 6-13. On-Resistance vs Input Voltage Single Channel - Across Ambient Temperatures (TPS22976A, TPS22976N)

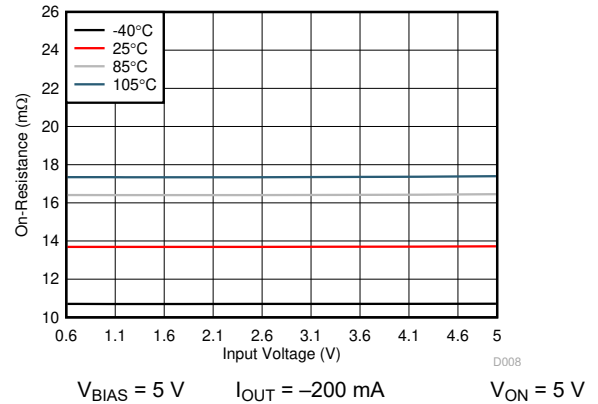


Figure 6-14. On-Resistance vs Input Voltage Single Channel - Across Ambient Temperatures (TPS22976A, TPS22976N)

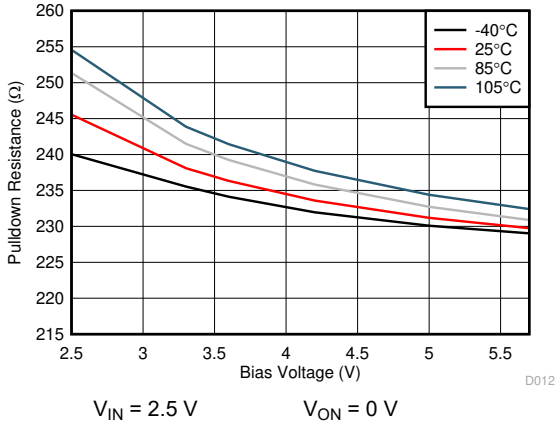


Figure 6-15. Pulldown Resistance vs Bias Voltage Single Channel

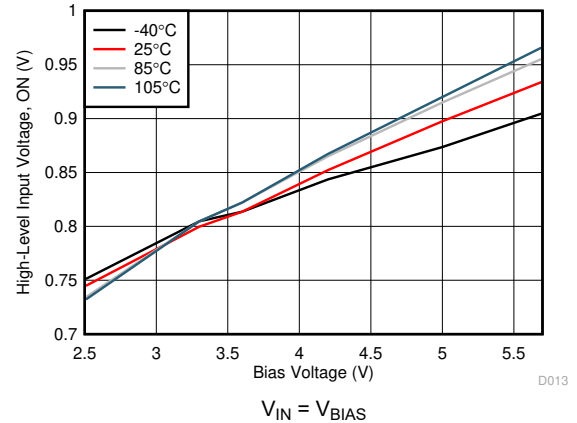


Figure 6-16. High-Level Input Voltage vs Bias Voltage

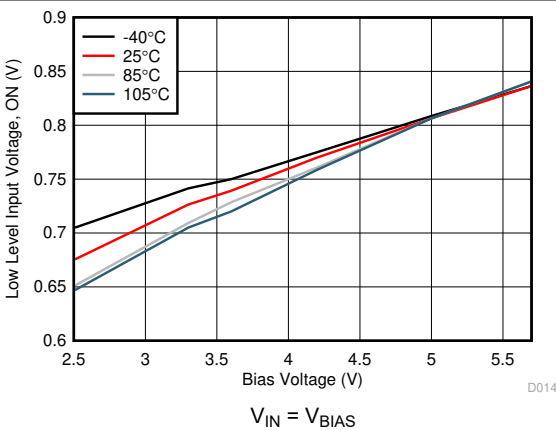


Figure 6-17. Low-Level Input Voltage vs Bias Voltage

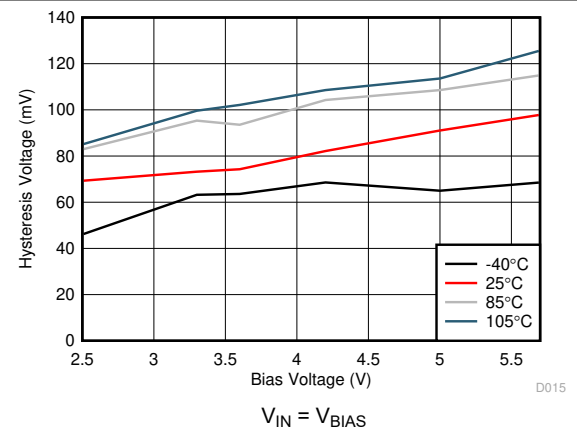


Figure 6-18. Voltage Input Hysteresis vs Bias Voltage

6.11 Typical AC Characteristics

AC Characteristics (TPS22976, TPS22976N)

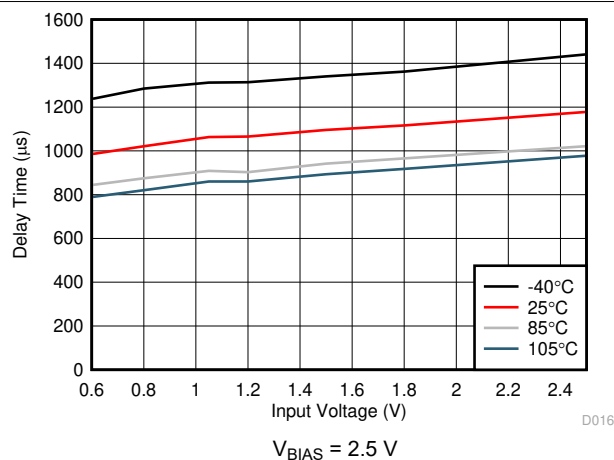


図 6-19. Delay Time vs Input Voltage

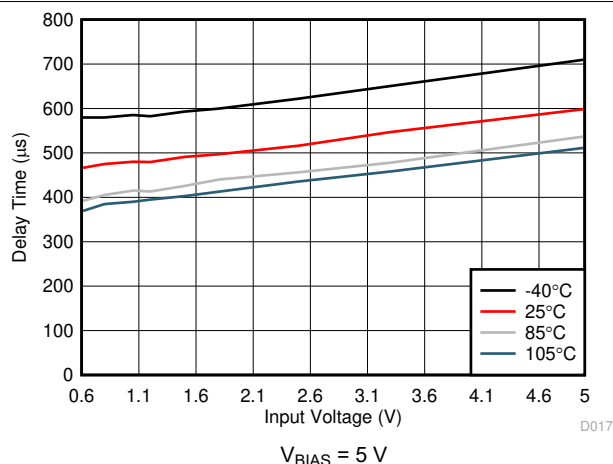


図 6-20. Delay Time vs Input Voltage

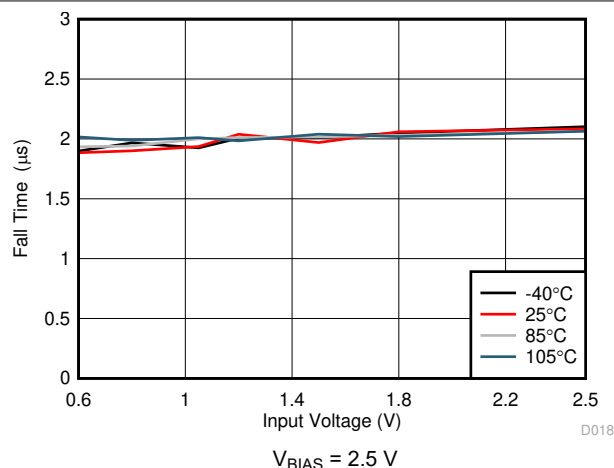


図 6-21. Fall Time vs Input Voltage

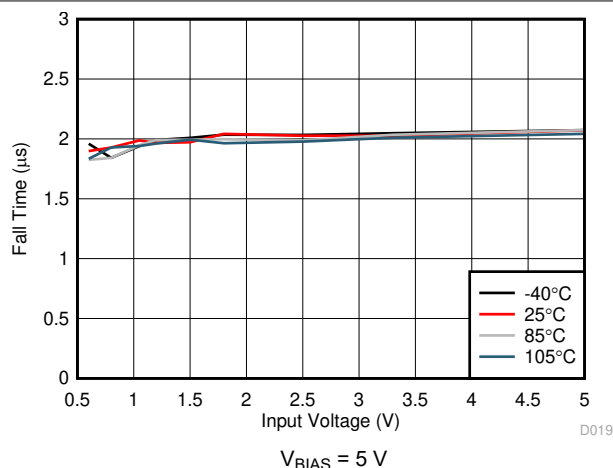


図 6-22. Fall Time vs Input Voltage

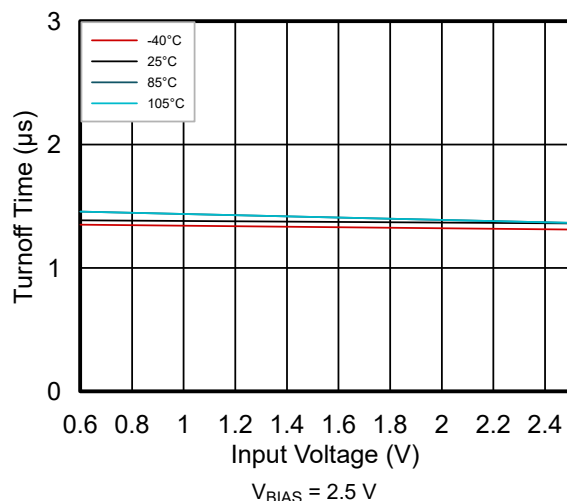


図 6-23. Turnoff Time vs Input Voltage (TPS22976)



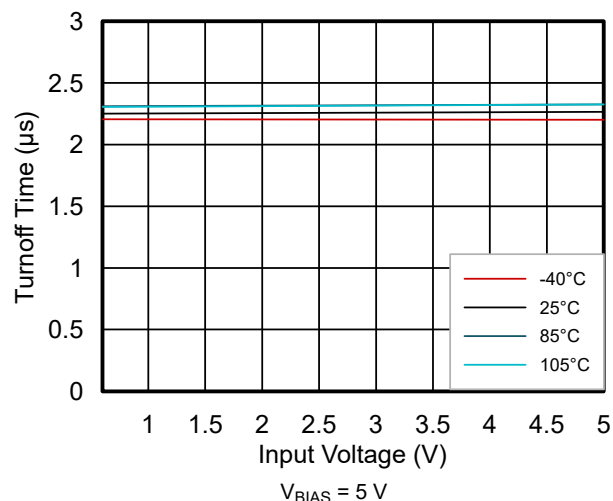


図 6-24. Turnoff Time vs Input Voltage (TPS22976)


6.11 Typical AC Characteristics (continued)

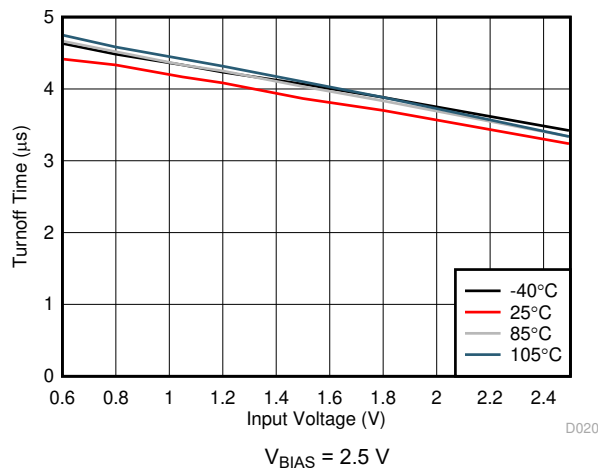


6-25. Turnoff Time vs Input Voltage (TPS22976N)

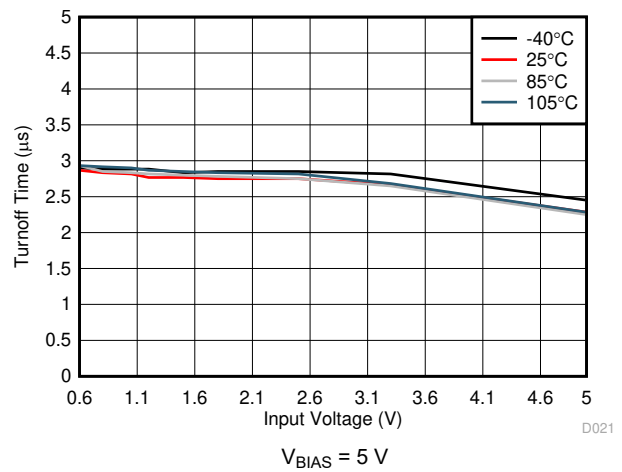


6-26. Turnoff Time vs Input Voltage (TPS22976N)

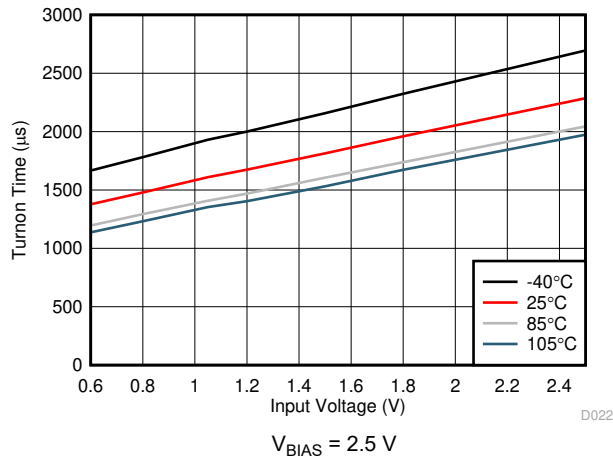


6-27. Turnon Time vs Input Voltage

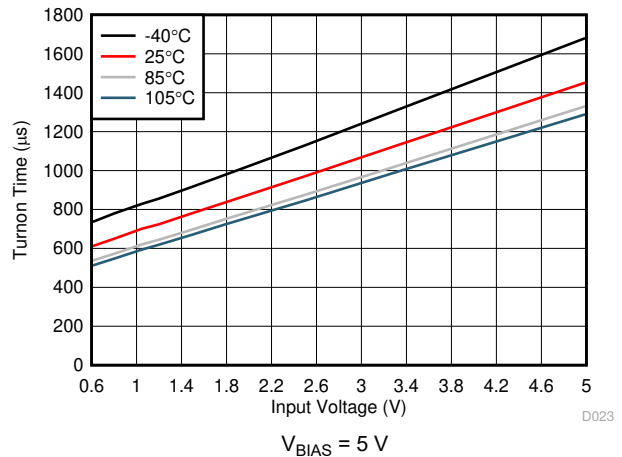

6-28. Turnon Time vs Input Voltage

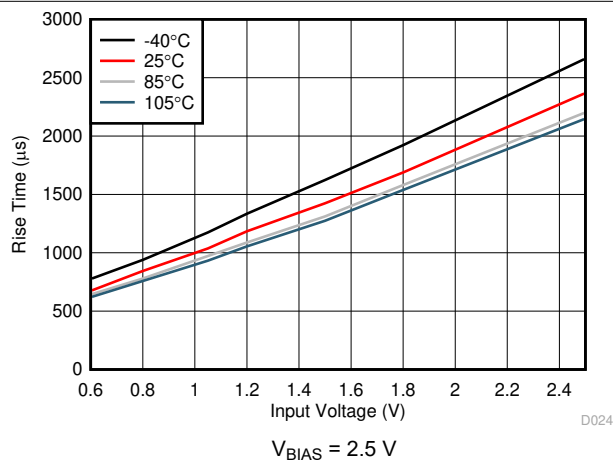


6-29. Rise Time vs Input Voltage

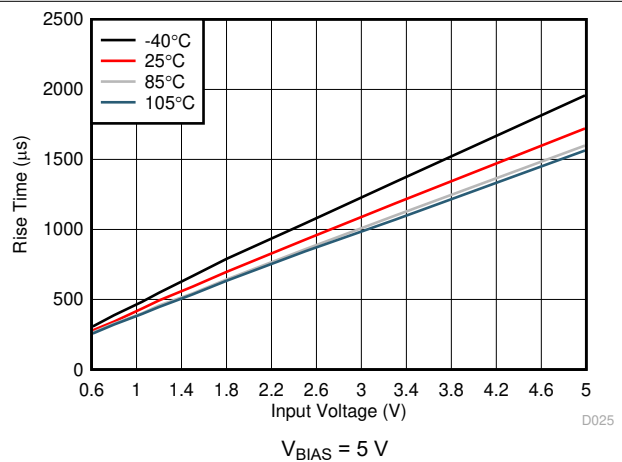


6-30. Rise Time vs Input Voltage


6.11 Typical AC Characteristics (continued)

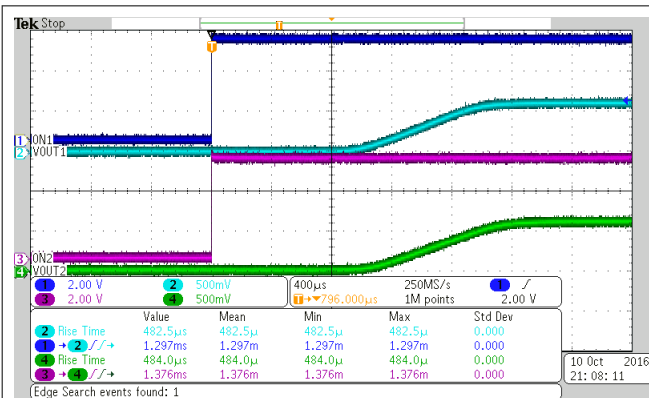 $V_{IN} = 0.6\text{ V}$ $V_{BIAS} = 2.5\text{ V}$


6-31. Turnon Response Time

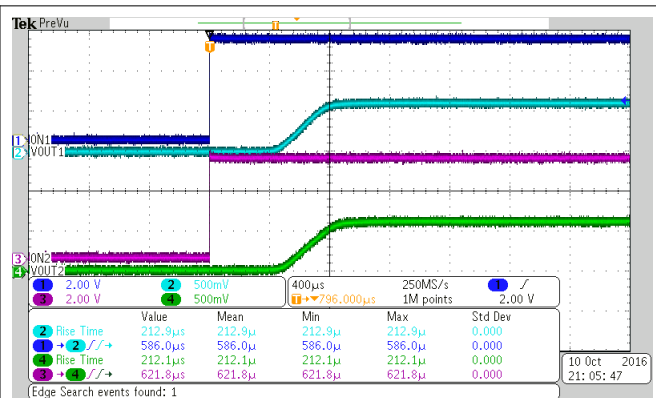 $V_{IN} = 0.6\text{ V}$ $V_{BIAS} = 5\text{ V}$


6-32. Turnon Response Time

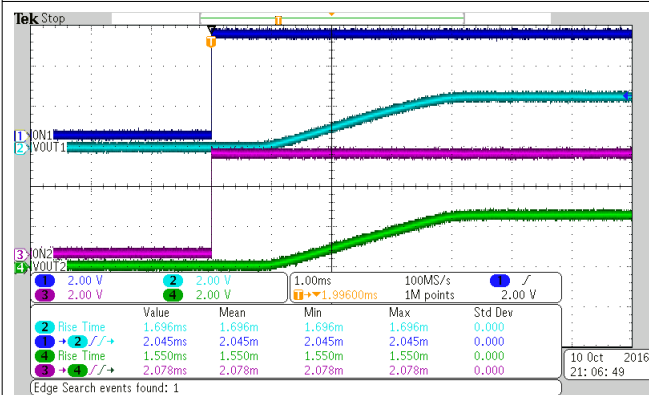 $V_{IN} = 2.5\text{ V}$ $V_{BIAS} = 2.5\text{ V}$


6-33. Turnon Response Time

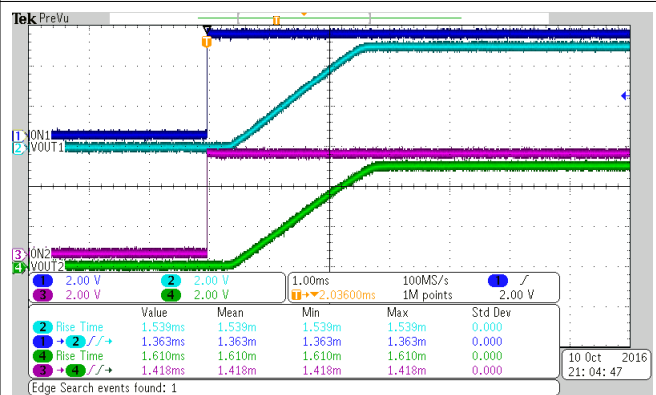 $V_{IN} = 5\text{ V}$ $V_{BIAS} = 5\text{ V}$

6-34. Turnon Response Time


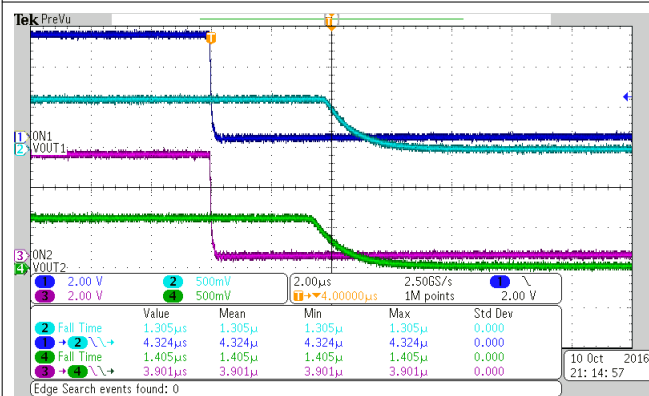
 $V_{IN} = 0.6\text{ V}$ $V_{BIAS} = 2.5\text{ V}$

6-35. Turnoff Response Time




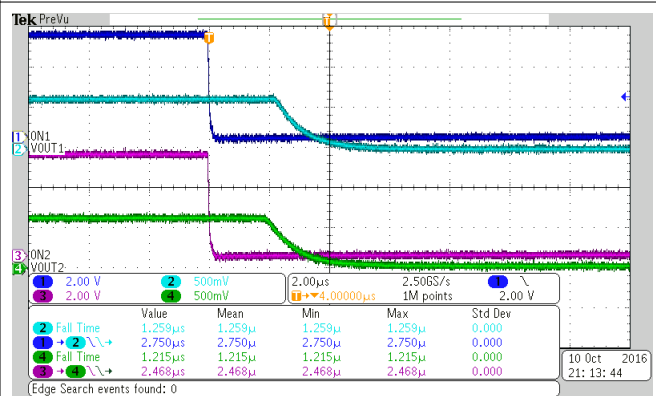
 $V_{IN} = 0.6\text{ V}$ $V_{BIAS} = 5\text{ V}$

6-36. Turnoff Response Time

6.11 Typical AC Characteristics (continued)

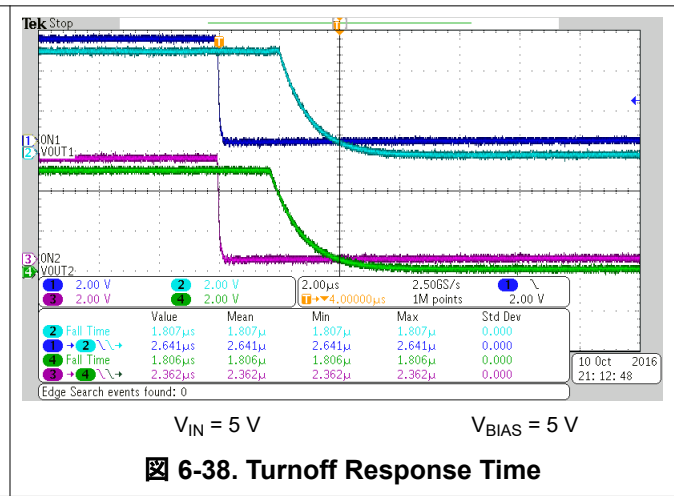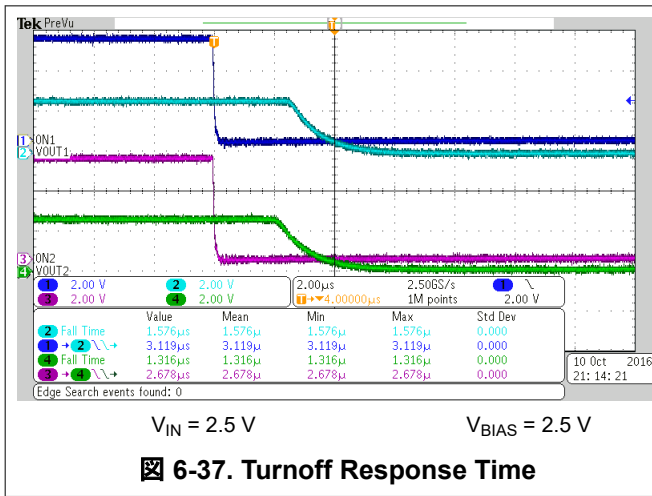

AC Characteristics (TPS22976A)

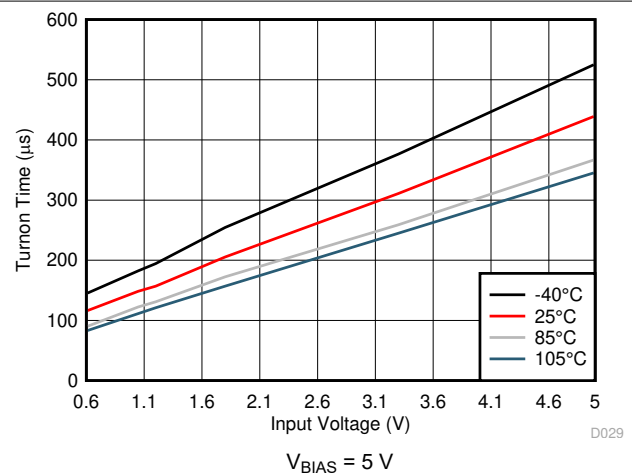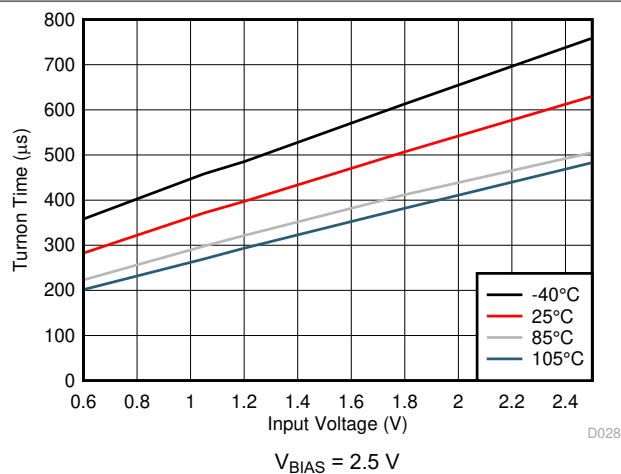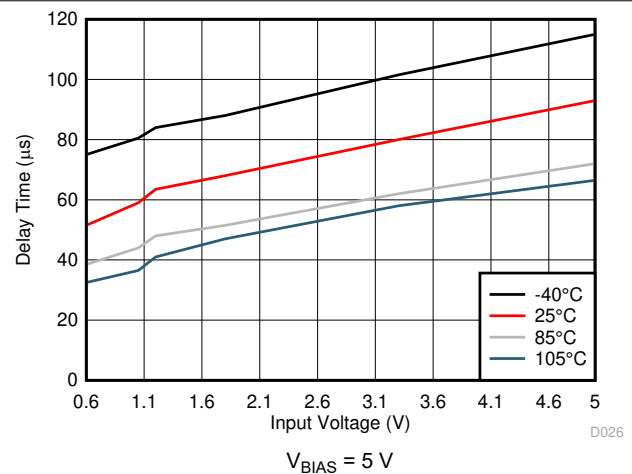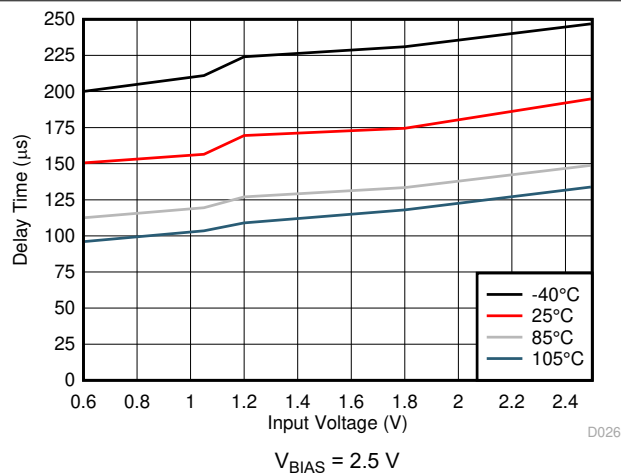

6.11 Typical AC Characteristics (continued)

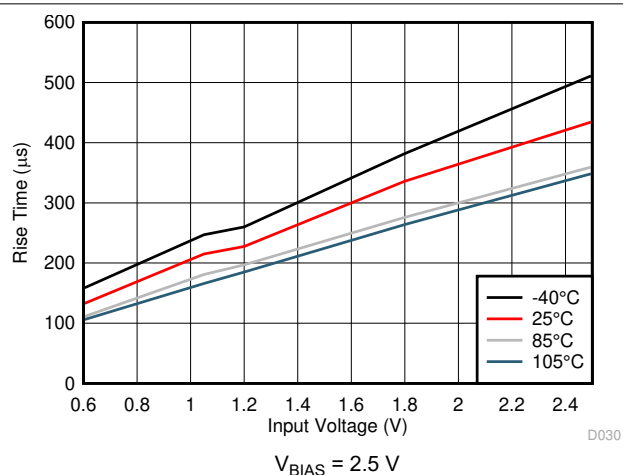


図 6-43. Rise Time vs Input Voltage



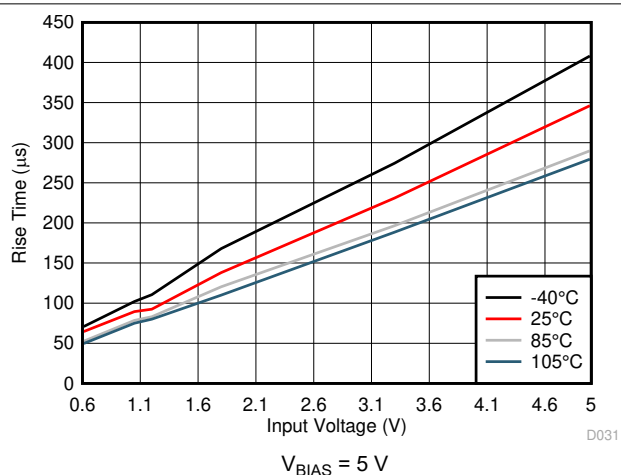


図 6-44. Rise Time vs Input Voltage

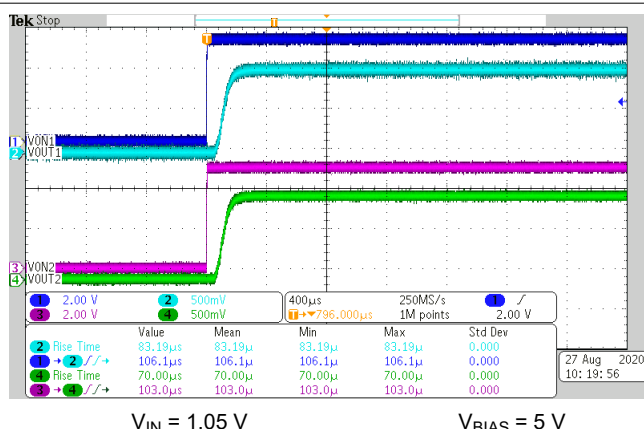


$V_{IN} = 1.05\text{ V}$ $V_{BIAS} = 5\text{ V}$

図 6-45. Turnon Response Time

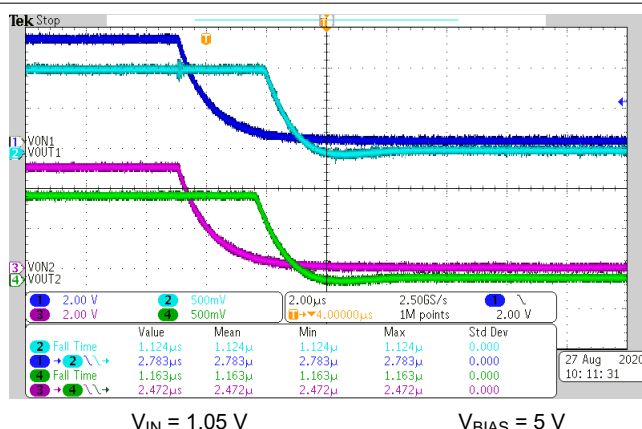

$V_{IN} = 1.05\text{ V}$ $V_{BIAS} = 5\text{ V}$

図 6-46. Turnoff Response Time

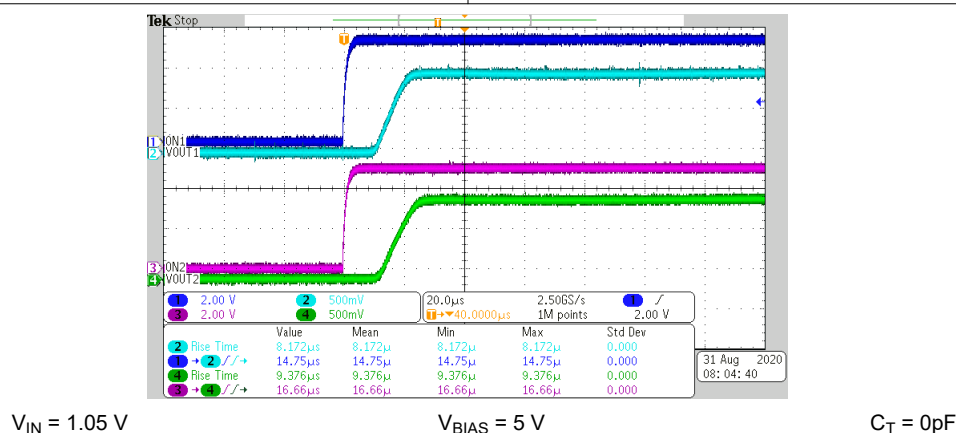


$V_{IN} = 1.05\text{ V}$

$V_{BIAS} = 5\text{ V}$


$C_T = 0\text{ pF}$

図 6-47. Turnon Response Time

7 Parameter Measurement Information

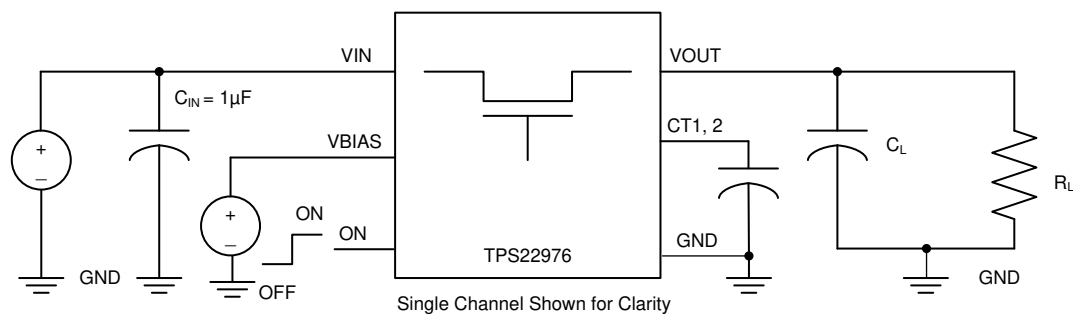

7-1. Test Circuit

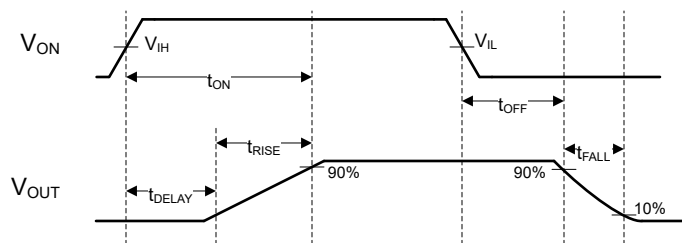

7-2. t_{ON} and t_{OFF} Waveforms

8 Detailed Description


8.1 Overview

The TPS22976 is a 5.7-V, dual-channel, 14-m Ω (typical) R_{ON} load switch in a 14-pin WSON package. Each channel can support a maximum continuous current of 6 A and is controlled by an on and off GPIO-compatible input. To reduce the voltage drop in high current rails, the device implements N-channel MOSFETs. Note that the ON pins must be connected and cannot be left floating. The device has a configurable slew rate for applications that require specific rise-time, which controls the inrush current. By controlling the inrush current, power supply sag can be reduced during turnon. Furthermore, the slew rate is proportional to the capacitor on the CT pin. See the [Adjustable Rise Time](#) section to determine the correct CT value for a desired rise time.

The internal circuitry is powered by the V_{BIAS} pin, which supports voltages from 2.5 V to 5.7 V. This circuitry includes the charge pump, QOD (optional), and control logic. When a voltage is applied to V_{BIAS} , and the ON_{1,2} pins transition to a low state, the QOD functionality is activated. This connects V_{OUT1} and V_{OUT2} to ground through the on-chip resistor. The typical pulldown resistance (R_{PD}) is 230 Ω .

During the off state, the device prevents downstream circuits from pulling high standby current from the supply. The integrated control logic, driver, power supply, and output discharge FET eliminates the need for any external components, reducing solution size and bill of materials (BOM) count.

8.2 Functional Block Diagram

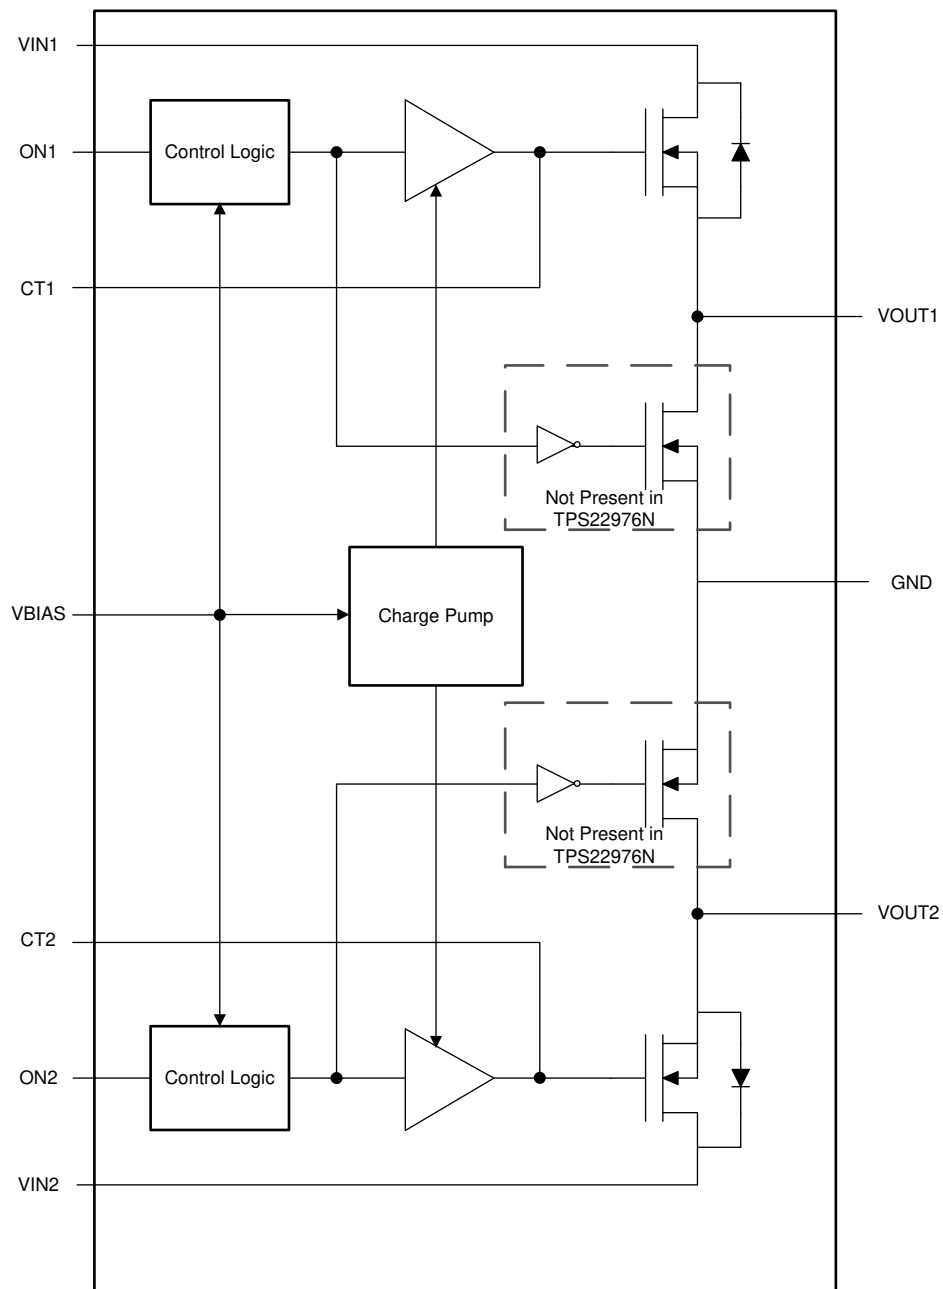

Copyright © 2016, Texas Instruments Incorporated

図 8-1. TPS22976 Functional Block Diagram

8.3 Feature Description

8.3.1 ON and OFF Control

The ON pins control the state of the switch. Asserting ON high enables the switch. ON is active high with a low threshold, making it capable of interfacing with low-voltage signals. The ON pin is compatible with standard GPIO logic threshold. It can be used with any microcontroller with 1.2 V or higher GPIO voltage. This pin cannot be left floating and must be tied either high or low for proper functionality.

8.3.2 Input Capacitor (Optional)

To limit the voltage drop on the input supply caused by transient inrush currents when the switch turns on into a discharged load capacitor, a capacitor needs to be placed between VIN and GND. A 1-μF ceramic capacitor, C_{IN}, placed close to the pins is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop during high-current application. When switching heavy loads, it is recommended to have an input capacitor about 10 times higher than the output capacitor to avoid excessive voltage drop.

8.3.3 Output Capacitor (Optional)

Due to the integrated body diode in the NMOS switch, a C_{IN} greater than C_L is highly recommended. A C_L greater than C_{IN} can cause V_{OUT} to exceed V_{IN} when the system supply is removed. This could result in current flow through the body diode from V_{OUT} to V_{IN}. A C_{IN} to C_L ratio of 10 to 1 is recommended for minimizing V_{IN} dip caused by inrush currents during startup, however a 10 to 1 ratio for capacitance is not required for proper functionality of the device. A ratio smaller than 10 to 1 (such as 1 to 1) could cause slightly more V_{IN} dip upon turnon due to inrush currents. This can be mitigated by increasing the capacitance on the CT pin for a longer rise time (see the [Adjustable Rise Time](#) section).

8.3.4 Quick Output Discharge (QOD) (Not Present in TPS22976N)

The TPS22976 and TPS22976A include a QOD feature. When the switch is disabled, an internal discharge resistance is connected between V_{OUT} and GND to remove the remaining charge from the output. This resistance prevents the output from floating while the switch is disabled. For best results, it is recommended that the device gets disabled before V_{BIAS} falls below the minimum recommended voltage.

8.3.5 Thermal Shutdown

Thermal Shutdown protects the part from internally or externally generated excessive temperatures. When the device temperature exceeds T_{SD} (typical 160°C), the switch is turned off. The switch automatically turns on again if the temperature of the die drops 20 degrees below the T_{SD} threshold.

8.4 Device Functional Modes

表 8-1 lists the TPS22976 and TPS22976A functions.

表 8-1. TPS22976 and TPS22976A Functions Table

ON	VIN to VOUT	VOUT
L	Off	GND
H	On	VIN

表 8-2 lists the TPS22976N functions.

表 8-2. TPS22976N Functions Table

ON	VIN to VOUT	VOUT
L	Off	Floating
H	On	VIN

9 Application and Implementation

注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。


9.1 Application Information

This section highlights some of the design considerations for implementing the device in various applications. A PSPICE model for this device is also available on the product page for additional information.

9.1.1 Parallel Configuration

To increase current capabilities and to lower R_{ON} , both channels can be placed in parallel as seen in [図 9-1](#). With this configuration, the CT1 and CT2 pins can be tied together to use one capacitor, CT.

See the [TPS22966 Dual-Channel Load Switch in Parallel Configuration](#) application report and [Parallel Load Switches for Higher Output Current & Reduced ON-Resistance Design Guide](#) for more information.

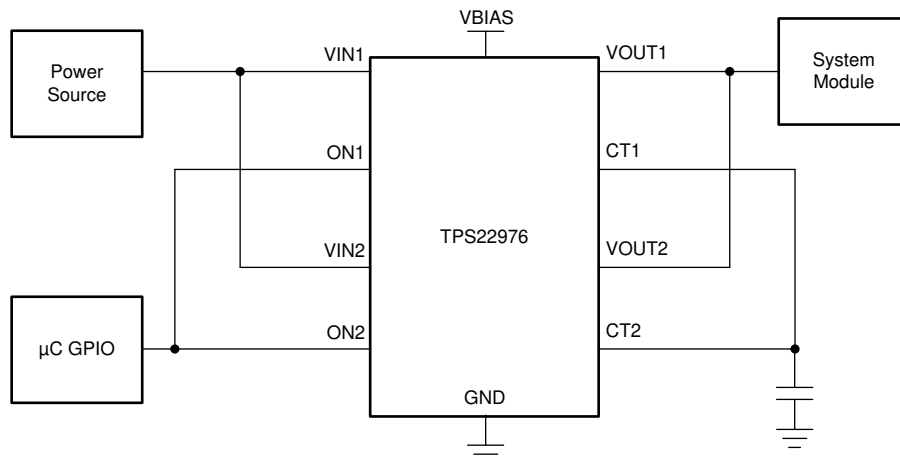

Copyright © 2016, Texas Instruments Incorporated

図 9-1. Parallel Configuration

9.1.2 Standby Power Reduction

Battery powered end equipments often have strict power budgets, in which there is a need to reduce current consumption. The TPS22976 significantly reduces system current consumption by disabling the supply voltage to subsystems in standby states. Alternatively, the TPS22976 reduces the leakage current overhead of the modules in standby mode as achieved in [図 9-2](#). Note that standby power reduction can be achieved on either channel, as well as dual-channel operation.

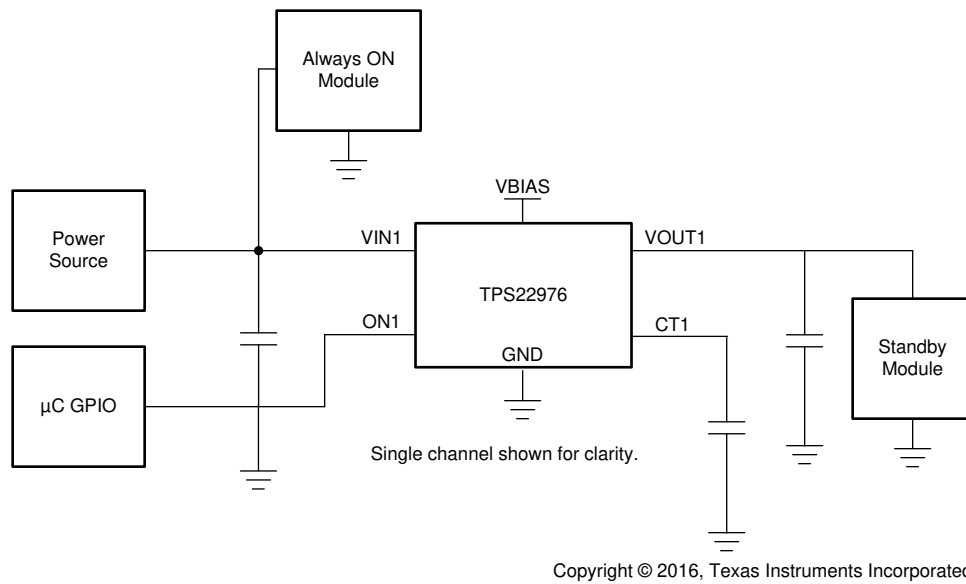


図 9-2. Standby Power Reduction

9.1.3 Power Supply Sequencing without GPIO Input

Sequential startup of several subsystems is often burdensome and adds complexity for several end equipments. The TPS22976 provides a power sequencing solution that reduces the overall system complexity, as seen in 図 9-3.


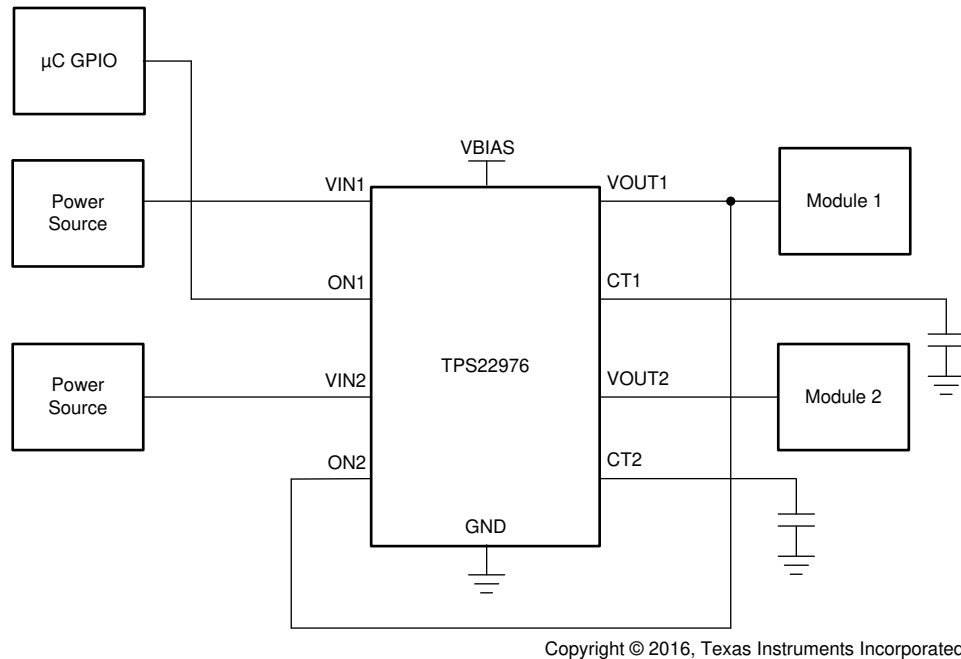


図 9-3. Power Sequencing without a GPIO Input

9.1.4 Reverse Current Blocking

Reverse current blocking is often desired in specific applications, as it prevents current from flowing from the output to the input of the load switch when the device is disabled. With the configuration illustrated in [Figure 9-4](#), the TPS22976 can be converted into a single-channel switch with reverse current blocking. VIN1 or VIN2 can be used as the input and VIN2 or VIN1 as the output.

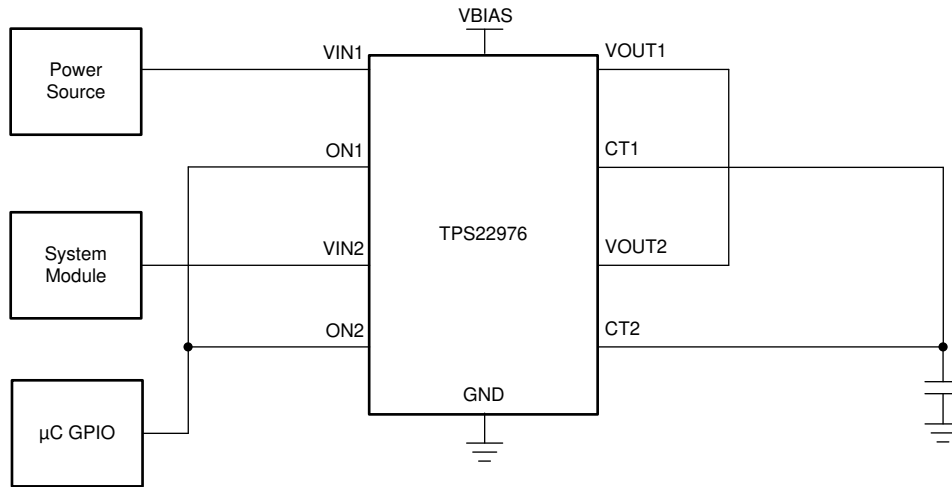


Copyright © 2016, Texas Instruments Incorporated

Figure 9-4. Reverse Current Blocking

9.2 Typical Application

This application demonstrates how the TPS22976 can be used to limit the inrush current when powering on downstream modules.

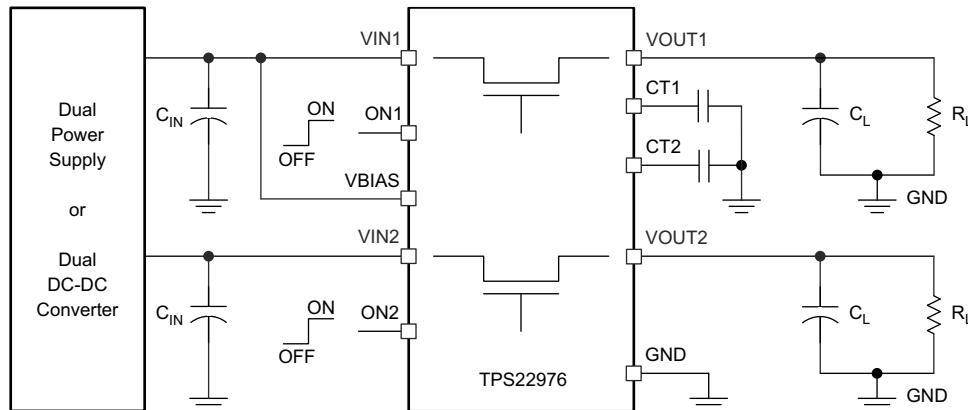

Copyright © 2016, Texas Instruments Incorporated

Figure 9-5. Typical Application Circuit

9.2.1 Design Requirements

表 9-1 shows the TPS22976 design parameters.

表 9-1. Design Parameters

DESIGN PARAMETER	VALUE
Input voltage	3.3 V
Bias voltage	5 V
Load capacitance (C_L)	22 μ F
Maximum acceptable inrush current	400 mA

9.2.2 Detailed Design Procedure

9.2.2.1 Inrush Current

When the switch is enabled, the output capacitors must be charged up from 0 V to the set value (3.3 V in this example). This charge arrives in the form of inrush current. Inrush current can be calculated using 式 1.

$$\text{Inrush Current} = C \times dV/dt \quad (1)$$

where

- C is the output capacitance
- dV is the output voltage
- dt is the rise time

The TPS22976 offers adjustable rise time for VOUT. This feature allows the user to control the inrush current during turnon. The appropriate rise time can be calculated using 表 9-1 and the inrush current equation. See 式 2 and 式 3.

$$400 \text{ mA} = 22 \text{ } \mu\text{F} \times 3.3 \text{ V}/dt \quad (2)$$

$$dt = 181.5 \text{ } \mu\text{s} \quad (3)$$

To ensure an inrush current of less than 400 mA, choose a CT value that yields a rise time of more than 181.5 μ s. See the oscilloscope captures in the [Application Curves](#) section for an example of how the CT capacitor can be used to reduce inrush current.

9.2.2.2 Adjustable Rise Time

A capacitor to GND on the CT pins sets the slew rate for each channel. To ensure desired performance, a capacitor with a minimum voltage rating of 25 V must be used on either CT pins. An approximate formula for the relationship between CT and slew rate is shown in Equation 4, and this is valid for TPS22976 and TPS22976N. The TPS22976A has a faster rise time and is represented by Equation 5.

Equation 4 and Equation 5 account for 10% to 90% measurement on V_{OUT} and do not apply for $CT < 100$ pF. Use 表 9-2 to determine rise times for when $CT = 0$ pF.

TPS22976, TPS22976N:

$$SR = 0.42 \times CT + 66 \quad (4)$$

TPS22976A:

$$SR = 0.0606 \times CT + 22 \quad (5)$$

where

- SR is the slew rate (in $\mu\text{s/V}$)
- CT is the capacitance value on the CT pin (in pF)
- The units for the constants 66 and 22 are in $\mu\text{s/V}$.

Rise time can be calculated by multiplying the input voltage by the slew rate. Table 10-2 shows rise time values measured on a typical device. Rise times shown below are only valid for the power-up sequence where V_{IN} and V_{BIAS} are already in steady state condition, and the ON pin is asserted high.

表 9-2. Rise Time Values (TPS22976, TPS22976N)

CT (pF)	RISE TIME (μs) 10% - 90%, $C_L = 0.1 \mu\text{F}$, $C_{IN} = 1 \mu\text{F}$, $R_L = 10 \Omega$ ⁽¹⁾						
	5 V	3.3 V	1.8 V	1.5 V	1.2 V	1.05 V	0.6 V
0	149	112	77	70	60	56	42
220	548	388	236	206	173	154	103
470	968	673	401	342	289	256	169
1000	1768	1220	711	608	505	445	286
2200	3916	2678	1554	1332	1097	949	627
4700	8040	5477	3179	2691	2240	1964	1249
10000	16520	11150	6410	5401	4430	3933	2526

(1) TYPICAL VALUES at 25°C, $V_{BIAS} = 5$ V, 25 V X7R 10% CERAMIC CAP

9.2.3 Application Curves

$V_{BIAS} = 5$ V ; $V_{IN} = 3.3$ V ; $C_L = 22$ μF

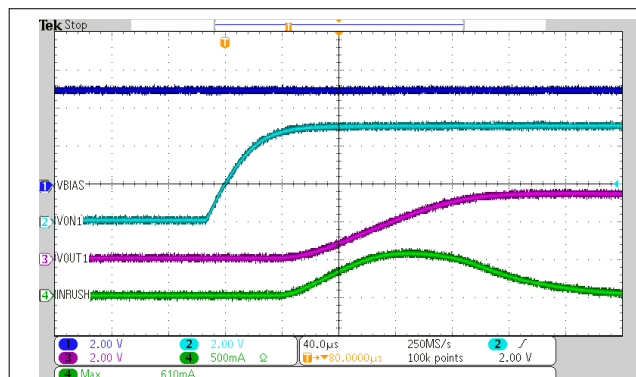


図 9-6. Inrush Current With CT = 0 pF

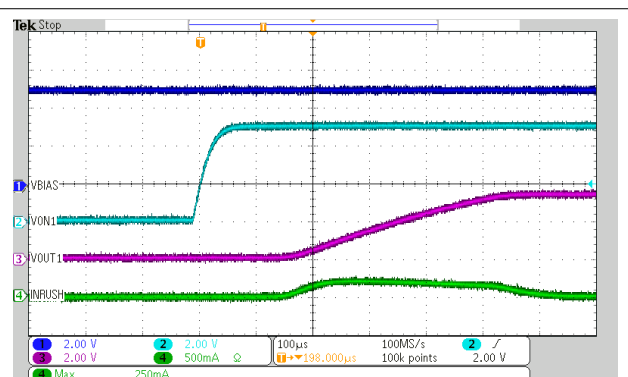


図 9-7. Inrush Current With CT = 220 pF

9.3 Power Supply Recommendations

The device is designed to operate from a V_{BIAS} range of 2.5 V to 5.7 V and a V_{IN} range of 0.6 V to V_{BIAS} .

9.4 Layout

9.4.1 Layout Guidelines

For best performance, all traces must be as short as possible. To be most effective, the input and output capacitors must be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for V_{IN} , V_{OUT} , and GND helps minimize the parasitic electrical effects along with minimizing the case to ambient thermal impedance.

9.4.2 Layout Example

Notice the thermal via located under the exposed thermal pad of the device. This allows for thermal diffusion away from the device.

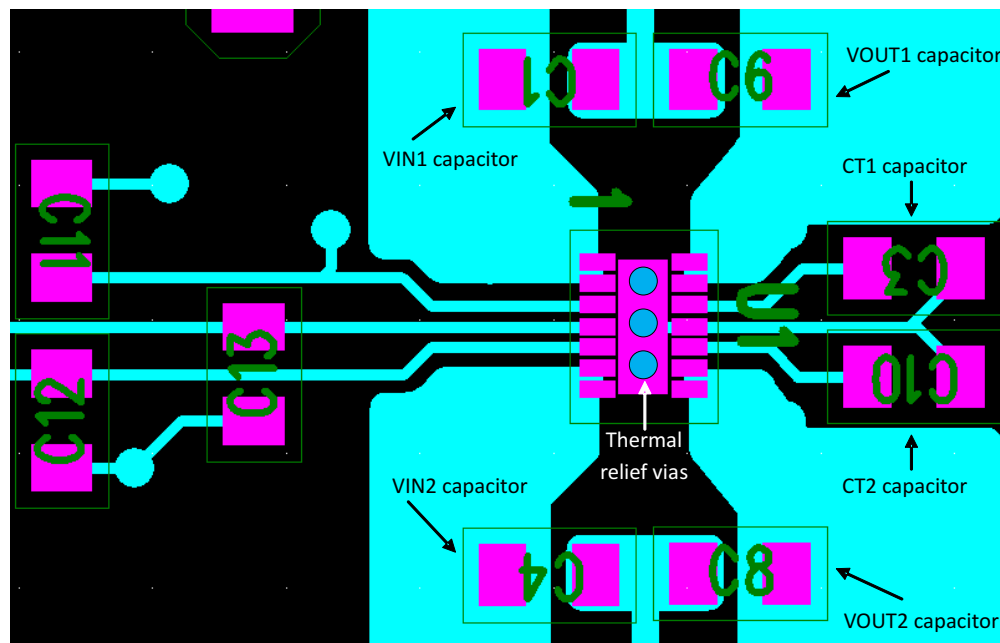


图 9-8. PCB Layout Example

9.4.3 Power Dissipation

The maximum IC junction temperature must be restricted to 125°C under normal operating conditions. To calculate the maximum allowable power dissipation, $P_{D(max)}$ for a given output current and ambient temperature, use 式 6.

$$P_{D(max)} = \frac{T_{J(max)} - T_A}{\theta_{JA}} \quad (6)$$

where

- $P_{D(max)}$ is the maximum allowable power dissipation.
- $T_{J(max)}$ is the maximum allowable junction temperature (125°C for the TPS22976).
- T_A is the ambient temperature of the device.
- θ_{JA} is the junction to air thermal impedance. See the [Thermal Information](#) section. This parameter is highly dependent upon board layout.

10 Device and Documentation Support

10.1 Device Support

10.1.1 Developmental Support

For the TPS22976N PSpice Transient Model, see [SLVMBV5](#).

For the TPS22976 PSpice Transient Model, see [SLVMBV6](#).

10.2 Documentation Support

10.2.1 Related Documentation

For related documentation see the following:

[TPS22976 Evaluation Module User's Guide](#)

10.3 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、www.tij.co.jp のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

10.4 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの[使用条件](#)を参照してください。

10.5 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

10.6 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

10.7 用語集

[テキサス・インスツルメンツ用語集](#) この用語集には、用語や略語の一覧および定義が記載されています。

11 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision C (September 2020) to Revision D (December 2023)	Page
• Updated R_{ON} for TPS22976 in the <i>Device Comparison Table</i>	3
• Updated $I_{Q,VBIAS}$ for TPS22976 in the <i>Electrical Characteristics (VBIAS = 5V)</i>	5
• Updated R_{ON} for TPS22976 in the <i>Electrical Characteristics (VBIAS = 5V)</i>	5
• Updated R_{ON} for TPS22976 in the <i>Electrical Characteristics (VBIAS = 2.5V)</i>	5
• Updated t_{OFF} for TPS22976 in the <i>Switching Characteristics (TPS22976)</i>	5
• Updated four On-resistance plots for TPS22976 in the <i>Typical DC Characteristics</i>	13
• Updated two turnoff time plots for TPS22976 in the <i>Typical AC Characteristics</i>	16

Changes from Revision B (September 2017) to Revision C (September 2020)	Page
• 「 特長 」一覧の TPS22976A の静止電流と立ち上がり時間を追加.....	1
• 「 製品情報 」表に TPS22976A を追加.....	1
• Added Switching Characteristics (TPS22976A) table.....	5
• Added a line for quiescent current for TPS22976A in all of the Specifications tables.....	5
• Added two quiescent current graphs in Typical DC Characteristics for the TPS22976A.....	13
• Added section for the TPS22976A in Typical AC Characteristics	16
• Added CT pin equation for the TPS22976A in Adjustable Rise Time section.....	29

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most-current data available for the designated devices. This data is subject to change without notice and without revision of this document. For browser-based versions of this data sheet, see the left-hand navigation pane.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS22976ADPUR	Active	Production	WSON (DPU) 14	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976A
TPS22976ADPUR.A	Active	Production	WSON (DPU) 14	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976A
TPS22976DPUR	Active	Production	WSON (DPU) 14	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976
TPS22976DPUR.A	Active	Production	WSON (DPU) 14	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976
TPS22976DPUT	Active	Production	WSON (DPU) 14	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976
TPS22976DPUT.A	Active	Production	WSON (DPU) 14	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976
TPS22976DPUTG4	Active	Production	WSON (DPU) 14	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976
TPS22976DPUTG4.A	Active	Production	WSON (DPU) 14	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976
TPS22976NDPUR	Active	Production	WSON (DPU) 14	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976N
TPS22976NDPUR.A	Active	Production	WSON (DPU) 14	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976N
TPS22976NDPUT	Active	Production	WSON (DPU) 14	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976N
TPS22976NDPUT.A	Active	Production	WSON (DPU) 14	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976N
TPS22976NDPUTG4	Active	Production	WSON (DPU) 14	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976N
TPS22976NDPUTG4.A	Active	Production	WSON (DPU) 14	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	22976N

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22976ADPUR	WSO	DPU	14	3000	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
TPS22976DPUR	WSO	DPU	14	3000	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
TPS22976DPUR	WSO	DPU	14	3000	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
TPS22976DPUT	WSO	DPU	14	250	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
TPS22976DPUTG4	WSO	DPU	14	250	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
TPS22976NDPUR	WSO	DPU	14	3000	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
TPS22976NDPUT	WSO	DPU	14	250	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
TPS22976NDPUTG4	WSO	DPU	14	250	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22976ADPUR	WSN	DPU	14	3000	182.0	182.0	20.0
TPS22976DPUR	WSN	DPU	14	3000	182.0	182.0	20.0
TPS22976DPUR	WSN	DPU	14	3000	210.0	185.0	35.0
TPS22976DPUT	WSN	DPU	14	250	182.0	182.0	20.0
TPS22976DPUTG4	WSN	DPU	14	250	182.0	182.0	20.0
TPS22976NDPUR	WSN	DPU	14	3000	182.0	182.0	20.0
TPS22976NDPUT	WSN	DPU	14	250	182.0	182.0	20.0
TPS22976NDPUTG4	WSN	DPU	14	250	182.0	182.0	20.0

DPU (R-PWSON-N14)

PLASTIC SMALL OUTLINE NO-LEAD

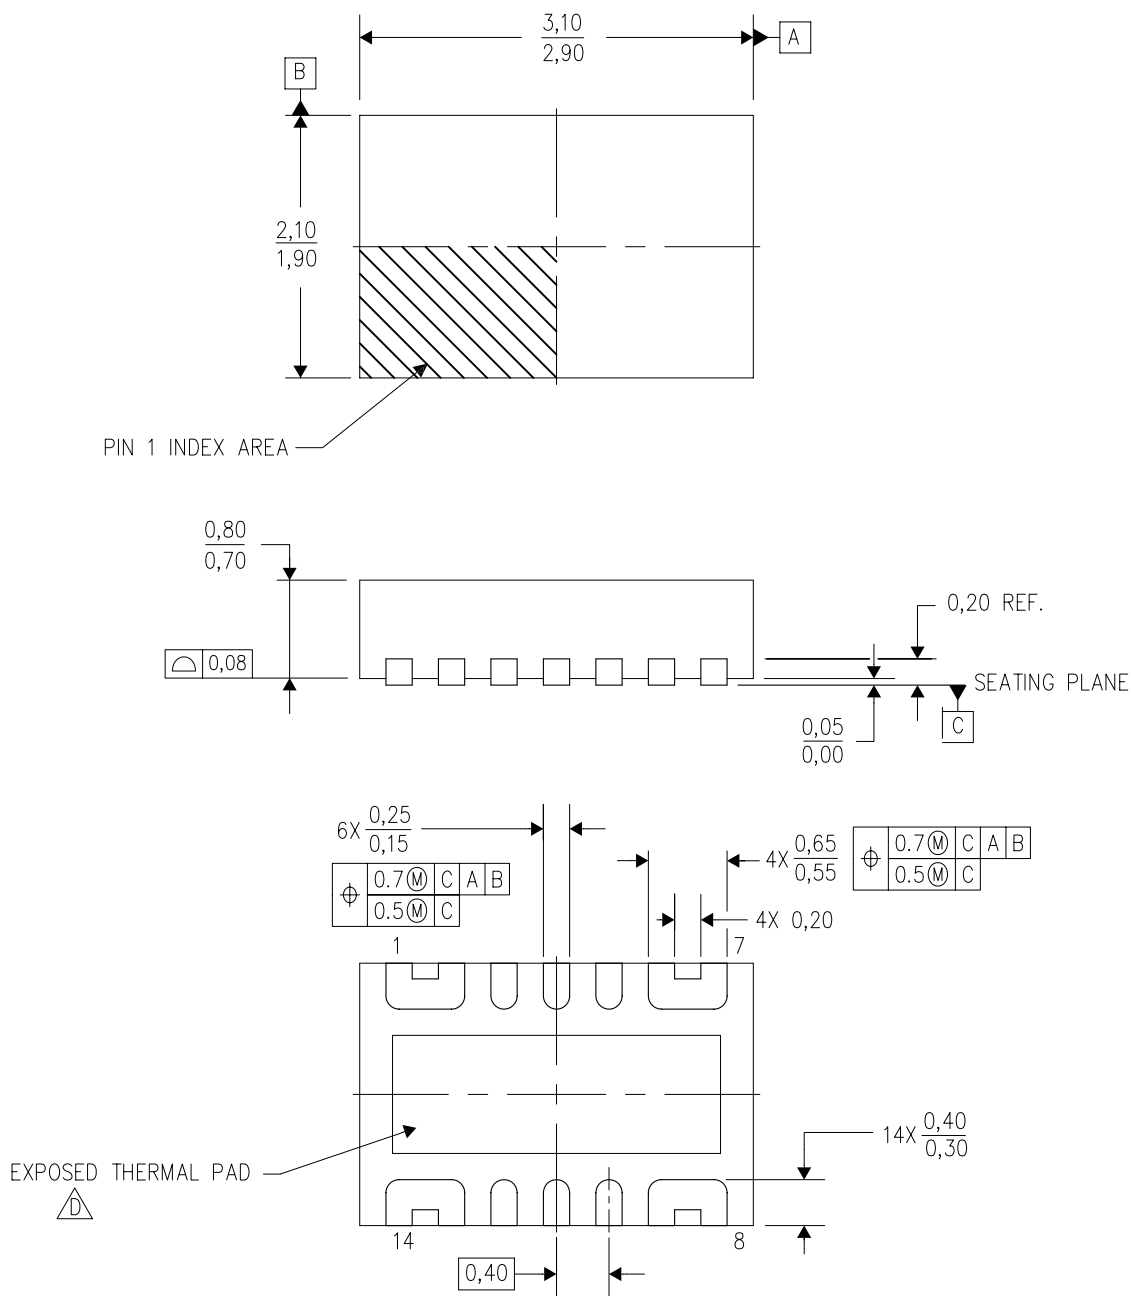

4211321/B 11/10

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - This drawing is subject to change without notice.
 - Small Outline No-Lead (SON) package configuration.
 - The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
 - This package is Pb-free.

DPU (R-PWSON-N14)


PLASTIC SMALL OUTLINE NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

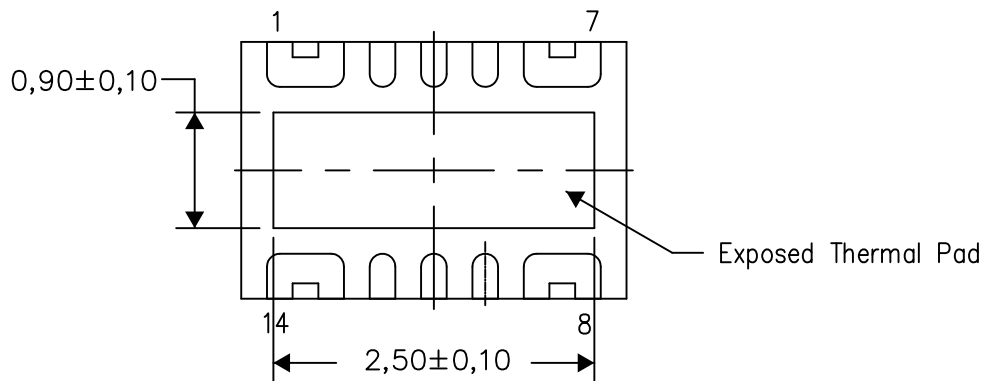

Bottom View


Exposed Thermal Pad Dimensions

4211395/C 04/15

NOTE: All linear dimensions are in millimeters

DPU (R-PWSON-N14)

PLASTIC SMALL OUTLINE NO-LEAD

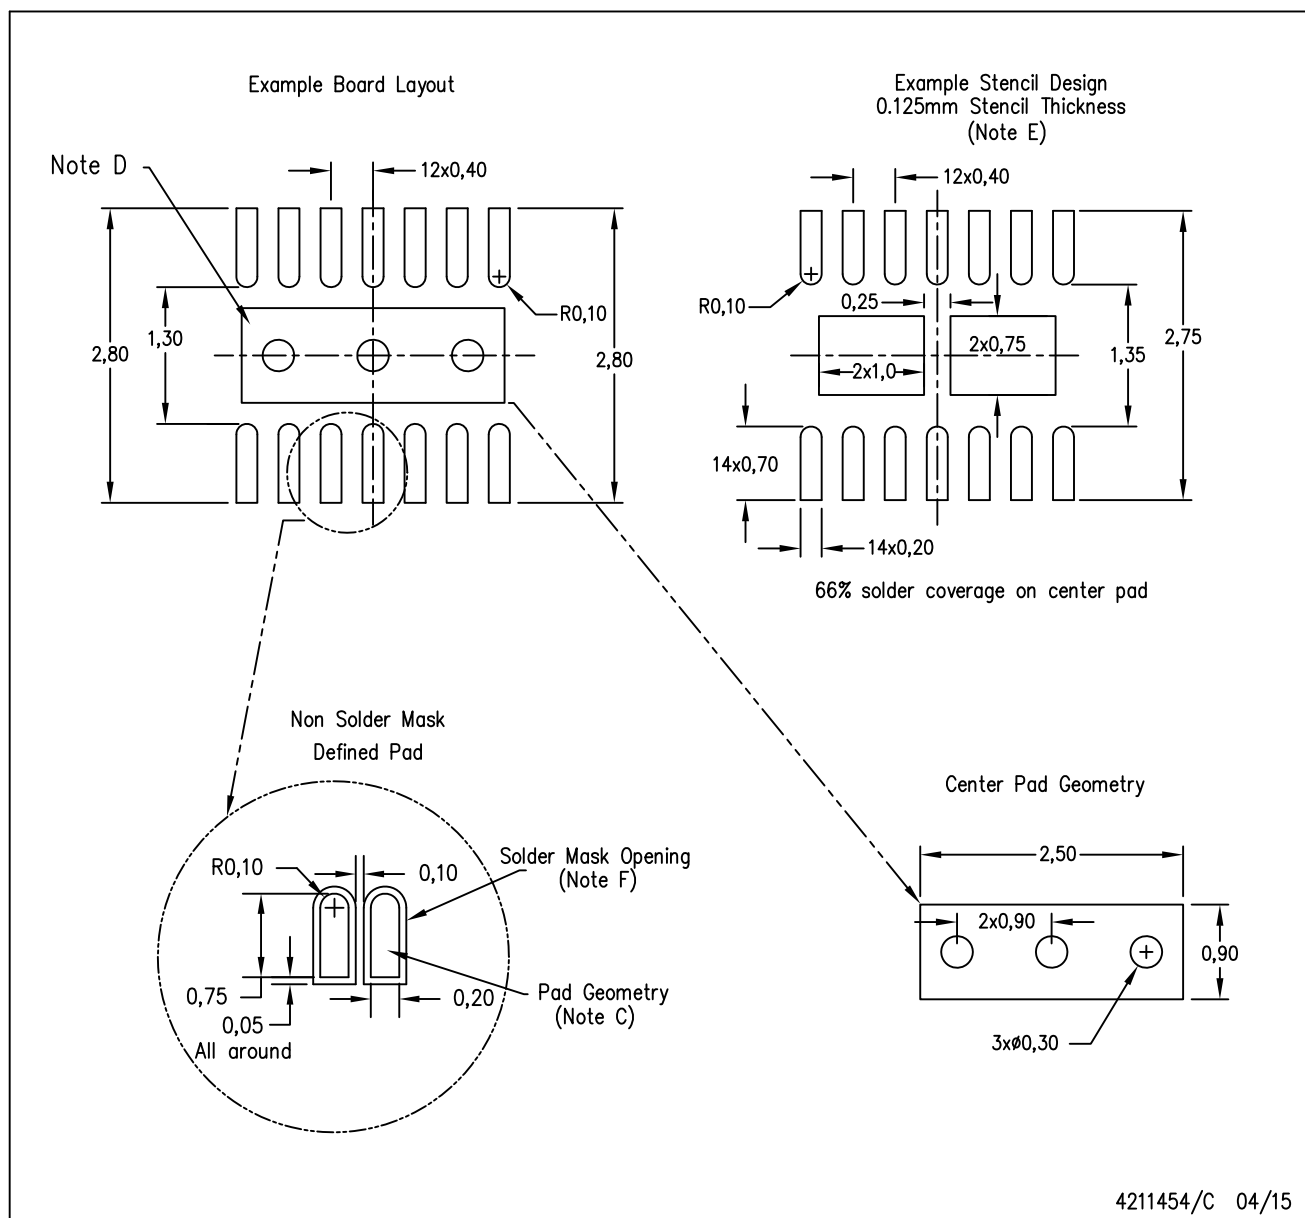

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Publication IPC-7351 is recommended for alternate designs.
 - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用される テキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated